

Cecotec Power Matic-ccino 8000 Touch Série Bianca S. (Model 01643)

Cecotec Power Matic-ccino 8000 Touch Série Bianca S. Coffee Machine User Manual

Model: 8000 S Série Bianca (01643)

1. INTRODUCTION

This user manual provides essential information for the safe and efficient operation of your Cecotec Power Matic-ccino 8000 Touch Série Bianca S. super-automatic coffee machine. Please read this manual thoroughly before first use and keep it for future reference. This machine is designed to prepare a variety of coffee beverages, including espresso, cappuccino, and latte, with customizable settings and an integrated milk frothing system.

2. SAFETY INSTRUCTIONS

Always observe basic safety precautions when using electrical appliances to reduce the risk of fire, electric shock, and/or injury to persons, including the following:

- Do not immerse the appliance, power cord, or plug in water or other liquids.
- Ensure the voltage indicated on the appliance corresponds to your mains voltage.
- Keep the appliance out of reach of children.
- Do not operate the appliance if the power cord or plug is damaged.
- Avoid contact with hot surfaces, such as the coffee spout and steam wand.
- Unplug the machine before cleaning or when not in use for an extended period.
- Only use original Cecotec accessories and spare parts.

3. PRODUCT OVERVIEW

The Cecotec Power Matic-ccino 8000 Touch Série Bianca S. is a sophisticated super-automatic coffee machine designed for ease of use and high-quality coffee preparation. Key components include:

- **Control Panel:** Interactive LED TouchScreen for intuitive operation.
- **Water Tank:** Removable, 1.7 L capacity.
- **Bean Hopper:** 250 g capacity with aroma-preserving lid.
- **Integrated Ceramic Grinder:** Offers 5 grinding levels.
- **Ground Coffee Reservoir:** Separate compartment for pre-ground coffee.
- **FullLatte Milk Tank:** 400 ml capacity, connectable to the machine and suitable for refrigerator storage.

- **Adjustable Coffee Spout:** Height adjustable from 10.5 cm to 15 cm.
- **Drip Tray:** Removable for easy cleaning, with a floating indicator.



Figure 3.1: Overview of the Cecotec Power Matic-ccino 8000 Touch Série Bianca S. coffee machine with its main components.

4. SETUP

4.1 Unpacking and Initial Cleaning

1. Carefully remove the machine from its packaging.
2. Remove all protective films and packaging materials.
3. Wash the water tank, milk tank, and drip tray with warm water and a mild detergent. Rinse thoroughly and dry.
4. Wipe the exterior of the machine with a damp cloth.

4.2 Filling Water and Coffee

1. Fill the water tank with fresh, cold water up to the MAX level. Insert it back into the machine.
2. Open the bean hopper lid and fill with fresh coffee beans (max 250g). Close the lid to preserve aroma.
3. If using ground coffee, add a single dose to the dedicated ground coffee reservoir when prompted by the machine for a specific beverage.

4.3 Connecting the Milk Tank

Attach the FullLatte milk tank to the designated port on the machine. Ensure it is securely connected for proper milk frothing.

4.4 Powering On

Plug the power cord into a grounded electrical outlet. Press the power button on the control panel. The machine will perform an initial rinse cycle. Follow any on-screen instructions.

5. OPERATING INSTRUCTIONS

5.1 Custom4You System: Personalizing Your Coffee

The Custom4You system allows for fully customizable settings to match your preferences. Use the interactive TouchScreen to adjust:

- **Intensity and Aroma:** Control the strength of your coffee.
- **Temperature:** Select your preferred beverage temperature.
- **Volume:** Adjust the amount of coffee or milk.
- **Milk Frothing Time:** Customize the foam consistency for milk-based drinks.
- **Water Hardness:** Set according to your local water supply for optimal performance and descaling reminders.

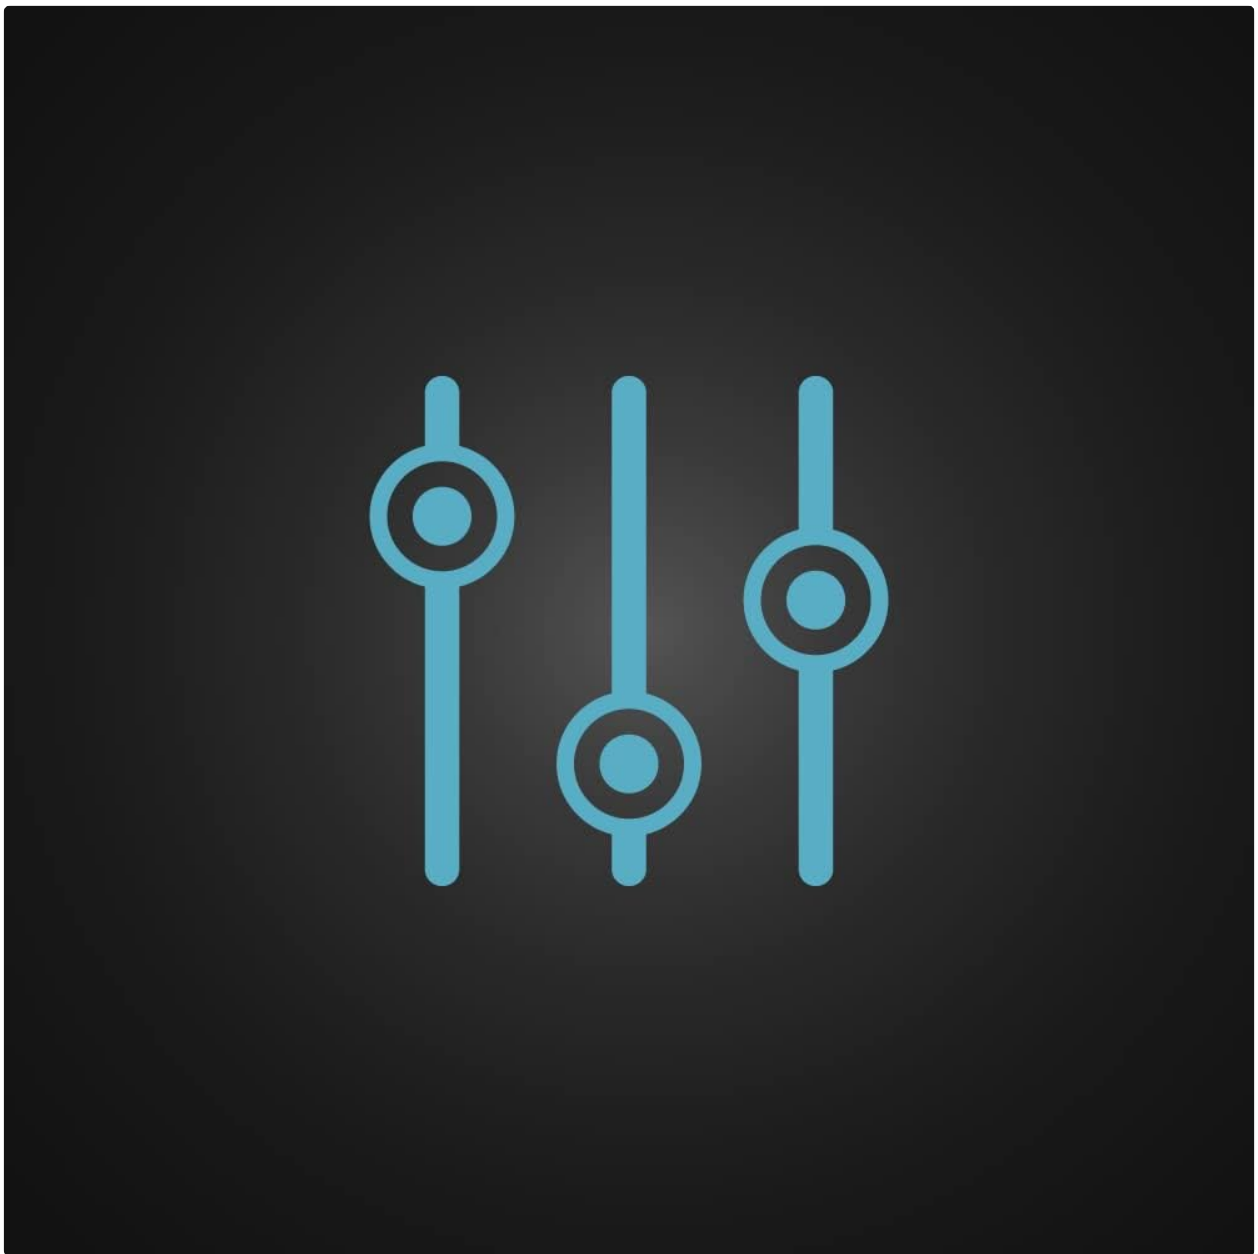


Figure 5.1: Icon representing the customization options available through the Custom4You system.

5.2 One-Touch Operation (Plug&Play)

Prepare a variety of coffee types automatically with a single touch on the LED TouchScreen. The Plug&Play system simplifies your coffee brewing experience.

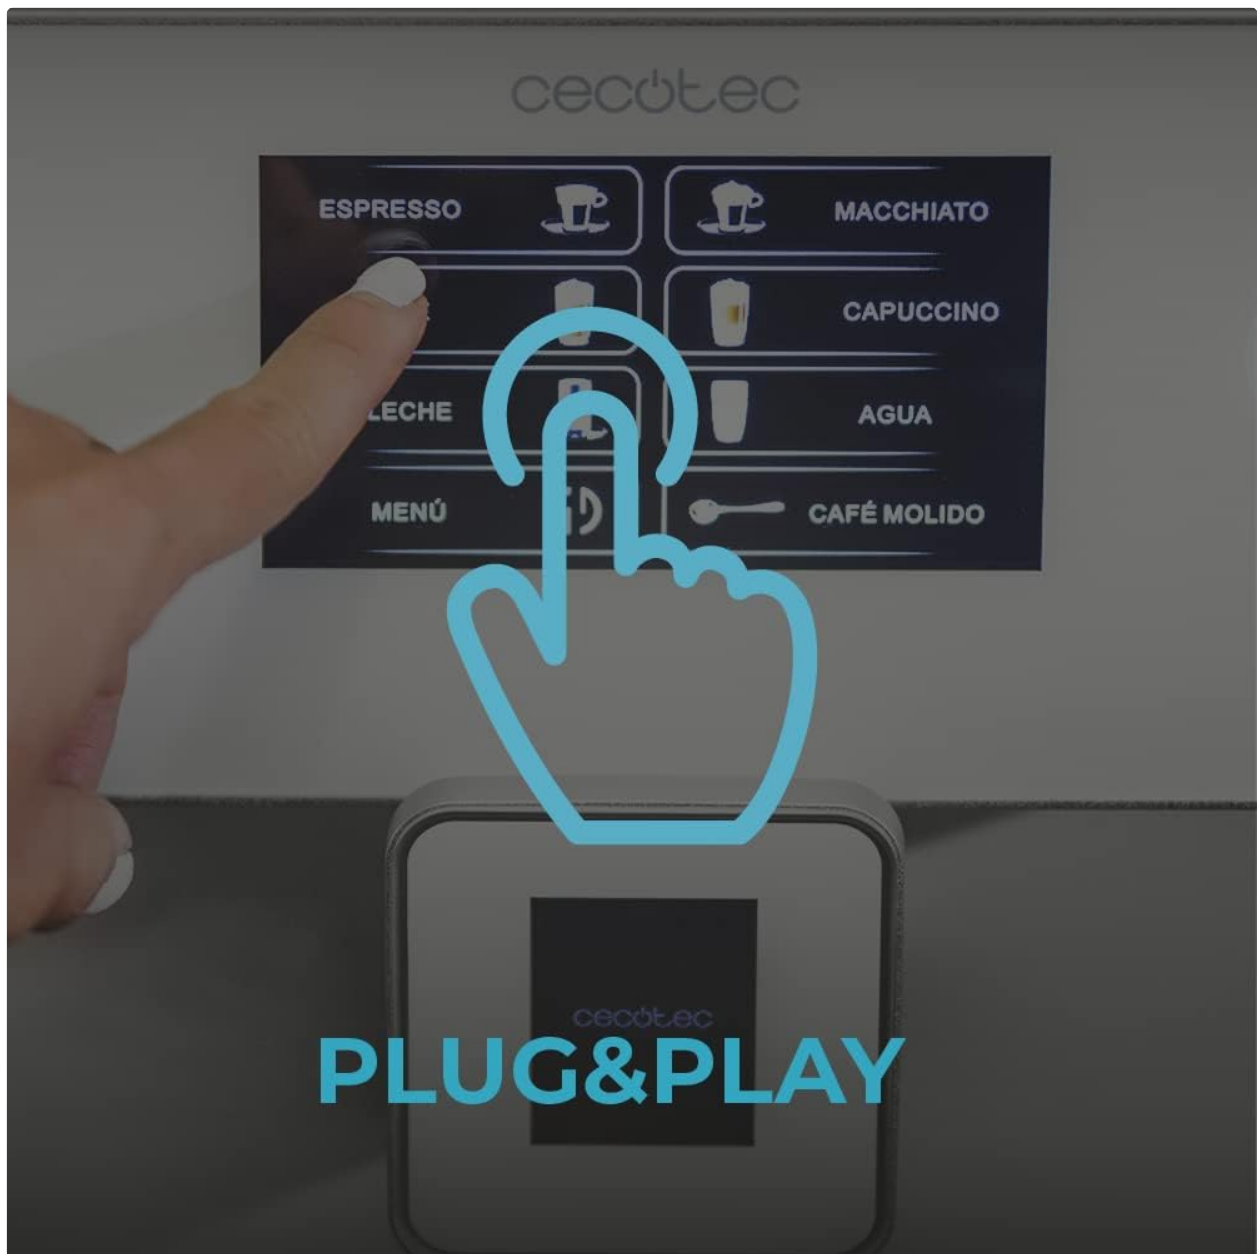


Figure 5.2: Visual representation of the Plug&Play one-touch operation for easy beverage selection.

5.3 AllCapuccino System

For lattes and cappuccinos, the AllCapuccino system automatically adds the precise amount of coffee, milk, or foam directly into your cup, ensuring perfect results every time.

5.4 Grinding Levels

The integrated ceramic grinder offers 5 selectable grinding levels, allowing you to fine-tune the grind size for optimal flavor extraction from your coffee beans.



Figure 5.3: Icon indicating the 5 adjustable grinding levels for coffee beans.

5.5 ForceAroma Technology (19 Bars)

Equipped with a 19-bar pressure pump, the ForceAroma technology ensures maximum creaminess and aroma extraction for all your coffee preparations, from Americano to Espresso.

A large, light blue graphic on a dark background. The number '19' is in a very large, bold, sans-serif font. Below it, the word 'bars' is written in a smaller, lowercase, sans-serif font.

Figure 5.4: Icon representing the 19 bars of pressure for optimal coffee extraction.

5.6 Adjustable Coffee Spout

The coffee spout can be adjusted in height from 10.5 cm to 15 cm, accommodating various cup sizes, from small espresso cups to large breakfast mugs.

5.7 Memory Function

The machine allows you to memorize your personalized settings for your favorite coffee beverages, ensuring consistent results with minimal effort.

6. MAINTENANCE AND CLEANING

Regular cleaning and maintenance are crucial for the longevity and optimal performance of your coffee machine. The AlwaysClean system provides individualized circuit cleaning.

6.1 Drip Tray

Empty and clean the removable drip tray regularly, especially when the floating indicator is visible.

6.2 Water Tank

Clean the water tank weekly with warm water and a soft brush. Do not use abrasive cleaners.

6.3 FullLatte Milk Tank and System

After each use of milk-based beverages, clean the milk system as prompted by the machine. The FullLatte tank should be rinsed daily and thoroughly cleaned weekly.

6.4 Bean Hopper and Grinder

Periodically remove any residual coffee beans and clean the bean hopper. The integrated grinder should be cleaned according to the instructions in the full manual (not provided here, but implied for a comprehensive manual).

6.5 Descaling

The machine will indicate when descaling is required based on your water hardness setting. Follow the on-screen instructions and use a suitable descaling solution recommended by Cecotec.

7. TROUBLESHOOTING

This section addresses common issues you might encounter with your coffee machine. For more complex problems, contact customer support.

Problem	Possible Cause	Solution
No coffee dispensed	Water tank empty; Coffee beans/ground coffee empty; Brewing unit clogged.	Refill water tank; Refill coffee; Clean brewing unit as per maintenance instructions.
Weak coffee	Grind setting too coarse; Insufficient coffee dose; Water temperature too low.	Adjust grind to finer setting; Increase coffee intensity setting; Check temperature settings.
Milk not frothing	Milk tank/system dirty; Milk type unsuitable; Milk temperature too high/low.	Clean milk tank and system thoroughly; Use cold, fresh milk (preferably semi-skimmed); Ensure milk is chilled.
Error message on screen	Specific internal issue.	Refer to the specific error code in the full manual or contact customer support.

8. SPECIFICATIONS

- **Brand:** Cecotec
- **Model Number:** 01643
- **Color:** Série Bianca
- **Dimensions (L x W x H):** 51.5 x 35.5 x 44 cm
- **Weight:** 11.1 Kilograms
- **Water Tank Capacity:** 1.7 Liters
- **Milk Tank Capacity:** 400 Milliliters
- **Bean Hopper Capacity:** 250 grams
- **Power:** 1400 Watts

- **Voltage:** 230 Volts
- **Pressure:** 19 Bars
- **Material:** Plastic
- **Special Feature:** Milk Frother, Touchscreen Display, Integrated Grinder
- **Type of Coffee Maker:** Espresso Machine

9. WARRANTY AND SUPPORT

Your Cecotec Power Matic-ccino 8000 Touch Série Bianca S. coffee machine comes with a standard manufacturer's warranty. Please refer to the warranty card included in your product packaging for specific terms and conditions.

Spare parts availability is guaranteed for 10 years from the date of purchase.

For technical support, service, or warranty claims, please contact Cecotec customer service through their official website or the contact information provided in your product documentation.