Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

DEALGADGETS DJ-XDD-US01

DEALGADGETS Flush Mount LED Ceiling Light Fixture

Model: DJ-XDD-US01

1. Introduction

Thank you for choosing the DEALGADGETS Flush Mount LED Ceiling Light Fixture. This ultra-thin, energy-efficient light is designed to provide bright, uniform illumination for various indoor spaces. This manual provides essential information for safe installation, operation, and maintenance of your new light fixture. Please read it thoroughly before installation and keep it for future reference.



Image 1.1: The DEALGADGETS Flush Mount LED Ceiling Light installed in a modern living room, showcasing its sleek, low-profile design and bright illumination. A white sofa, coffee table, and green plant are visible in the foreground.

2. Safety Information

WARNING: To avoid fire, electric shock, or personal injury, please follow these instructions carefully.

- Always turn off the power at the circuit breaker or fuse box before installing, servicing, or cleaning the fixture.
- Consult a qualified electrician if you are unsure about the installation process.
- This fixture is designed for indoor use only. Do not expose to direct water spray or submersion.
- Ensure all electrical connections are secure and comply with local codes and ordinances.
- Do not attempt to modify the fixture. Any modifications may void the warranty and pose a safety risk.

- The LED light source is non-replaceable. Do not attempt to disassemble the LED module.

3. Package Contents

Carefully unpack your light fixture and check that all the following items are included:

- 1 x LED Ceiling Light Fixture
- 1 x Instruction Manual
- 2 x Wire Nuts
- 2 x Mounting Screws
- 2 x Wall Anchors



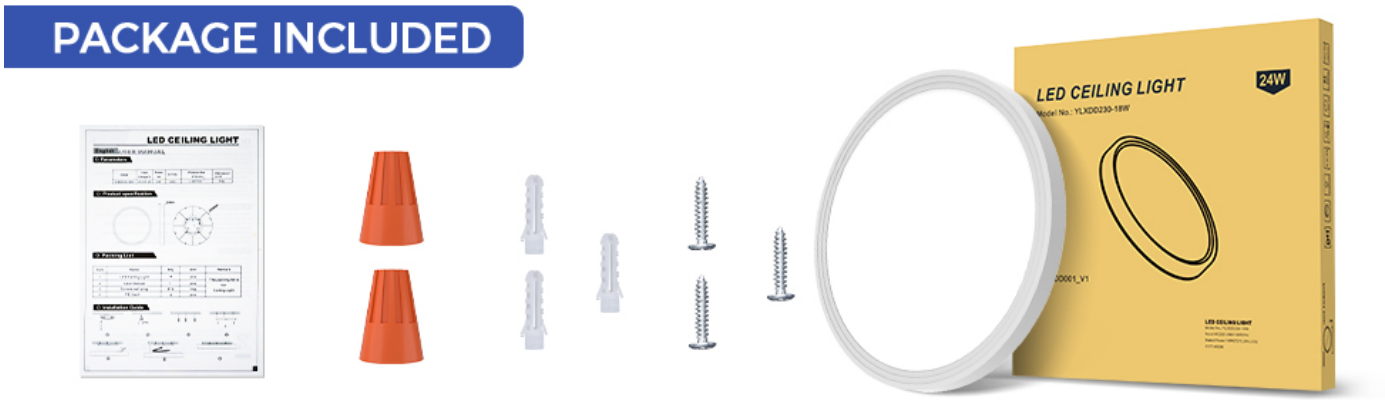


Image 3.1: An illustration detailing the contents of the product package, including the LED ceiling light, an instruction manual, two wire nuts, two mounting screws, and two wall anchors.

4. Specifications

Attribute	Value
Model Name	XDD
Part Number	XDD-02

Item Model Number	DJ-XDD-US01
Dimensions (L x W x H)	9.36" x 7.8" x 2.1" (23.77 cm x 19.81 cm x 5.33 cm)
Item Weight	13.4 ounces (0.38 kg)
Color	White
Material	Plastic, Polycarbonate, Shell
Style	Modern
Light Source Type	LED
Wattage	24 Watts
Brightness	2200 Lumens
Color Temperature	6000 Kelvin (Cool White)
Voltage	120 Volts
Lifespan	Up to 25,000 hours
Installation Type	Flush Mount
Special Features	Energy Efficient, Waterproof (IP44), Dustproof, Anti-Mosquito Design, Ultra-thin
Control Method	Push Button (via wall switch)

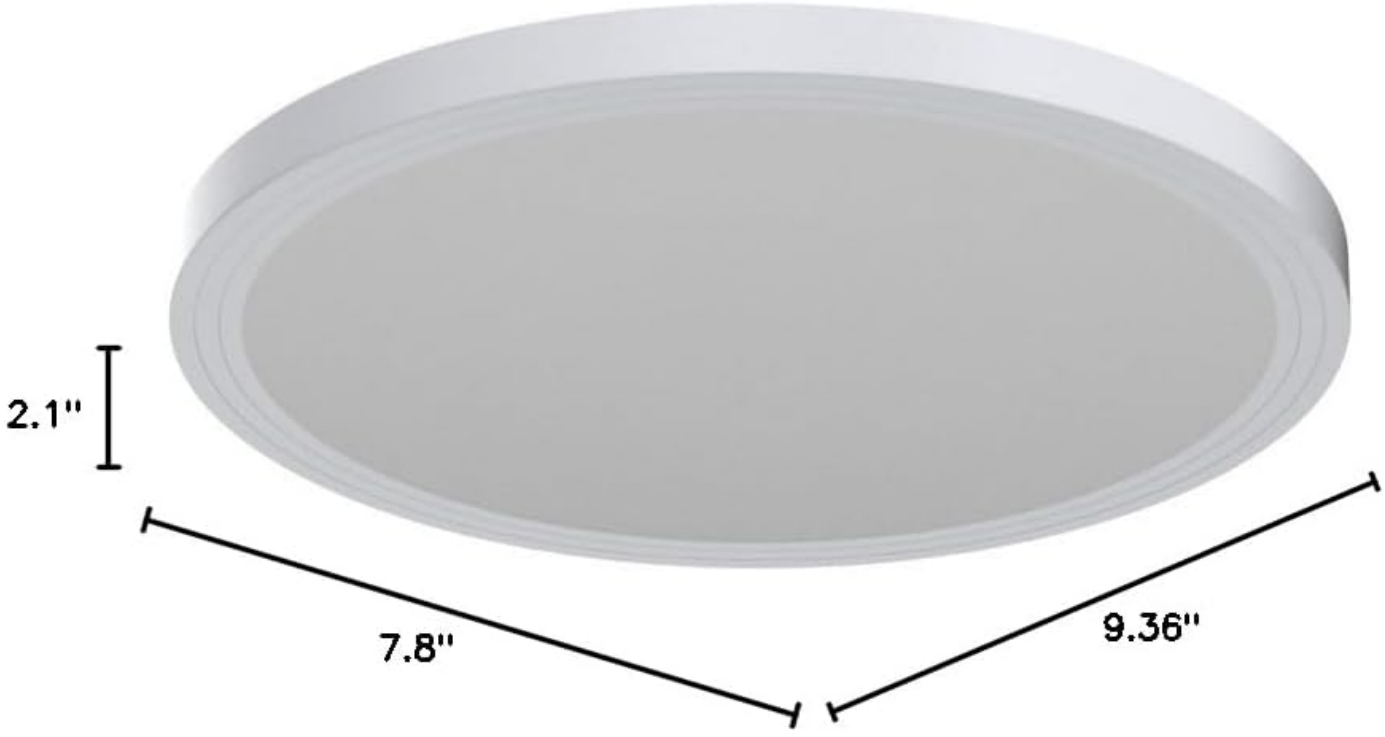


Image 4.1: A diagram illustrating the precise dimensions of the LED ceiling light fixture, indicating a length of 9.36 inches, a width of 7.8 inches, and a height of 2.1 inches.

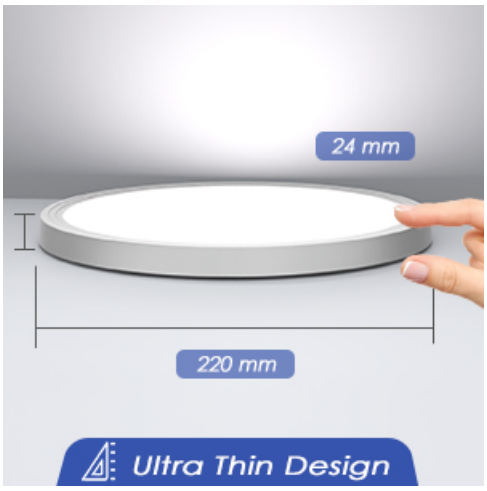


Image 4.2: A close-up view highlighting the ultra-thin profile of the LED ceiling light, with measurements indicating a thickness of 24mm and a diameter of 220mm.

5. Setup and Installation

This LED ceiling light is designed for easy installation and is compatible with most standard junction boxes. No electrician is typically required for installation, but always ensure power is off before beginning.

Installation Steps:

1. **Turn Off Power:** Before starting, ensure the power to the circuit is turned off at the circuit breaker or fuse box to prevent electric shock.
2. **Attach the Bracket:** Secure the mounting bracket to the ceiling junction box using the provided screws. Ensure it is firmly attached.
3. **Connect the Wires:** Connect the household wires to the fixture wires using the provided wire nuts. Typically, connect the black (L) wire from the fixture to the black (L) wire from the ceiling, and the white (N) wire from the fixture to the white (N) wire from the ceiling. Ensure connections are secure. This fixture does not require a ground wire.
4. **Fix the Base:** Align the light fixture's base with the mounting bracket on the ceiling.
5. **Rotate and Secure:** Gently push the lamp body upwards and rotate it clockwise until it locks securely into place on the base.
6. **Restore Power:** Once the fixture is securely installed, turn the power back on at the circuit breaker.



Image 5.1: A visual guide demonstrating the three main steps for installing the LED ceiling light: connecting the wires, securing the base to the ceiling, and rotating the lamp body to complete the installation. The image also highlights the fixture's compatibility with various types of junction boxes.

6. Operating Instructions

The DEALGADGETS Flush Mount LED Ceiling Light Fixture operates via a standard wall switch. It is not dimmable.

- **Turning On/Off:** Flip the wall switch connected to the fixture to turn the light on or off.
- **Light Output:** The fixture provides a consistent 2200 lumens of 6000K cool white light, suitable for various rooms including bedrooms, kitchens, bathrooms, garages, living rooms, and dining rooms.



Image 6.1: A side-by-side comparison illustrating the superior brightness and uniform illumination provided by the DEALGADGETS LED ceiling light ('Ours') compared to a dimly lit room with another light source ('Others').



Image 6.2: A diagram illustrating the wide 120-degree light beam angle of the ceiling light, indicating broad coverage for room illumination.

7. Maintenance

Regular maintenance will help ensure the longevity and optimal performance of your LED ceiling light.

- **Cleaning:** Before cleaning, ensure the power to the fixture is turned off. Wipe the fixture with a soft, dry, or slightly damp cloth. Do not use harsh chemicals, abrasive cleaners, or solvents, as these may damage the finish or electrical components.
- **Dust and Insect Prevention:** The fixture features an anti-dust design to prevent dust and insects from entering the lamp body, reducing the need for frequent internal cleaning.
- **No Bulb Replacement:** The LED light source is integrated and designed for a long lifespan (up to 25,000 hours), eliminating the need for bulb replacement.



Image 7.1: An illustration highlighting the anti-dust design of the LED ceiling light, which prevents mosquitoes and dust from accumulating inside the fixture.



Image 7.2: An image depicting water splashing on the light fixture, demonstrating its IP44 waterproof rating, which protects against splashes from any direction.

8. Troubleshooting

If you encounter any issues with your light fixture, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on	No power to the fixture Loose wire connections Faulty wall switch	Check circuit breaker/fuse. Ensure all wire connections are secure (with power off). Test the wall switch or replace if necessary.
Light flickers	Loose wire connections Incompatible dimmer switch (this fixture is non-dimmable)	Check wire connections (with power off). Ensure the fixture is connected to a standard ON/OFF switch, not a dimmer.
Light is dim	Incorrect voltage Fixture not designed for higher brightness	Verify the voltage supply is 120V. This fixture provides 2200 lumens at 6000K, which is its maximum output.

If the problem persists after trying these solutions, please contact customer support.

9. Warranty and Support

For warranty information or technical support, please refer to the contact details provided with your purchase or visit the official DEALGADGETS website. Please have your model number (DJ-XDD-US01) and purchase date ready when contacting support.

© 2023 DEALGADGETS. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0BQC6S64B

More documents and user manuals: **https://manuals.plus/**