Manuals+

Q & A | Deep Search | Upload

manuals.plus /

- Strex /
- > Strex SP66 Inspection Camera User Manual

Strex SP66

Strex SP66 Inspection Camera User Manual

Model: SP66

1. Introduction

This manual provides detailed instructions for the safe and effective use of your Strex SP66 Inspection Camera. Please read this manual thoroughly before operating the device and retain it for future reference. The Strex SP66 is designed for inspecting hard-to-reach areas, offering clear visuals with its 1080P HD camera and 4.3-inch LCD screen.

2. PRODUCT OVERVIEW

The Strex SP66 Inspection Camera is a versatile tool equipped with a flexible 10-meter cable and an 8mm camera lens. It features adjustable LED lighting for optimal visibility in dark environments and an IP67 waterproof rating for use in wet conditions. The integrated 4.3-inch LCD provides a clear 1080P HD display for real-time viewing and recording.



Figure 2.1: Strex SP66 Inspection Camera with its flexible cable and included SD card.



Figure 2.2: Overview of key features including the 8mm lens, 70-degree viewing angle, and IP67 rating.



Figure 2.3: The 4.3-inch HD LCD screen provides a clear 1080P display for detailed inspections.

ALTIJD GOED ZICHT Hoge kwaliteit camera lens



Figure 2.4: The camera lens features 8 built-in adjustable LED lights and IP67 protection for clear images in various conditions.



Figure 2.5: The flexible yet rigid cable design allows it to hold its shape for easier navigation in tight spaces.



Figure 2.6: The inspection camera is suitable for a wide range of tasks, including plumbing, automotive, electrical, and industrial inspections.

3. PACKAGE CONTENTS

Verify that all items listed below are included in your package. If any items are missing or damaged, please contact customer support.

- 1 x Strex SP66 Inspection Camera (with 10-meter cable)
- 1 x USB Charging Cable
- 1 x User Manual
- 3 x Attachments: Hook, Magnet, Side Mirror
- 1 x SD Card (32GB, if included with your model)



Figure 3.1: All components included in the Strex SP66 Inspection Camera package.

4. SETUP

4.1 Charging the Device

Before first use, fully charge the inspection camera. Connect the provided USB charging cable to the camera's charging port and to a standard USB power adapter (not included) or a computer USB port. The built-in 2600 mAh battery provides up to 7 hours of continuous operation on a full charge.

KRACHTIGE BATTERIJ Ingebouwde 2600 mAh batterij erkt tot 7 uur achtei Ikaar op één lading

Figure 4.1: The camera is equipped with a 2600 mAh battery, offering extended usage time.

4.2 Inserting the SD Card

Locate the SD card slot on the side of the device. Gently insert the SD card (if not pre-installed) with the metal contacts facing down until it clicks into place. This card is essential for saving photos and videos.

4.3 Attaching Accessories

The camera comes with three useful attachments: a hook, a magnet, and a side mirror. To attach an accessory, carefully screw it onto the threaded end of the camera lens. Ensure it is securely fastened before use.

3 HANDIGE OPZETSTUKKEN

De ideale hulpjes tijdens je klus



Figure 4.2: The included hook, magnet, and side mirror attachments for various inspection needs.

5. OPERATING INSTRUCTIONS

5.1 Powering On/Off

To power on the device, press and hold the power button (usually marked with a power symbol) for a few seconds until the screen illuminates. To power off, press and hold the power button again until the screen turns off.

5.2 Adjusting LED Lighting

The camera lens is equipped with adjustable LED lights. Use the designated button (often marked with a light bulb symbol or up/down arrows) to increase or decrease the brightness of the LEDs. Adjust the lighting to achieve optimal visibility in the inspection area.

5.3 Capturing Images and Videos

• Taking Photos: While viewing the live feed, press the photo button (often marked with a camera icon) to capture a still image. The image will be saved to the inserted SD card.

• **Recording Videos:** To start recording, press the video button (often marked with a video camera icon). Press it again to stop recording. Videos will be saved to the SD card in 1080p resolution.

5.4 Viewing Media

Access the gallery or playback mode on the device to review captured photos and videos. Use the navigation buttons to scroll through your media. You can also connect the device to a computer via the USB cable or remove the SD card and insert it into a card reader to transfer files.

6. MAINTENANCE

- Cleaning: Wipe the camera lens and screen with a soft, dry cloth. For stubborn dirt, use a slightly damp cloth and ensure the device is powered off. Do not use abrasive cleaners or solvents.
- **Storage:** Store the device in a cool, dry place away from direct sunlight and extreme temperatures. Ensure the cable is neatly coiled to prevent damage.
- **Battery Care:** To prolong battery life, avoid fully discharging the battery frequently. If storing for an extended period, charge the battery to approximately 50% every few months.

7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Device does not power on.	Low battery; device malfunction.	Charge the device for at least 2 hours. If still unresponsive, contact support.
No image on screen.	Cable not properly connected; camera lens obstructed.	Ensure the camera cable is securely connected. Check the lens for obstructions.
Image is dark or unclear.	Insufficient LED brightness; dirty lens.	Adjust the LED brightness. Clean the camera lens.
Cannot save photos/videos.	No SD card inserted; SD card full or corrupted.	Insert a compatible SD card. Delete old files or format the SD card (backup data first).
Device freezes or becomes unresponsive.	Software glitch.	Press and hold the power button for 10-15 seconds to force a restart.

8. SPECIFICATIONS

Brand	Strex
Model	SP66
Color	Orange
Camera Lens Diameter	8 mm
Display Type	4.3-inch LCD Screen
Video Resolution	1080p
Supported Media	SD Card (JPEG, MP4)

Cable Length	10 meters
Water Resistance	IP67 (camera lens and cable)
LED Lights	Adjustable, 8 LEDs
Battery Capacity	2600 mAh
Operating Time	Up to 7 hours (on full charge)
Item Weight	430 Grams
Product Dimensions (L x W x H)	1.8 x 8.5 x 14.5 cm

9. WARRANTY AND SUPPORT

Information regarding specific warranty terms and customer support contact details is not available in the provided product data. Please refer to the product packaging or the manufacturer's official website for warranty information and support contacts.

Related Documents - SP66



Strex Industrial Screen Endoscope User Manual SP66/SP116

User manual for the Strex Industrial Screen Endoscope (Models SP66/SP116). Features include a 4.3-inch LCD screen, 1080P video, IP67 waterproof camera, and 5-hour battery life. Suitable for various inspection tasks in hard-to-reach areas.




STREX Draadloze Deurbel SP112 Handleiding

Gedetailleerde gebruikershandleiding voor de STREX Draadloze Deurbel SP112. Bevat installatie-instructies, veiligheidsrichtlijnen, technische specificaties en probleemoplossing.




STREX Action Camera 5K SP304 User Manual: Features, Operation, and Safety

Comprehensive user manual for the STREX Action Camera 5K (SP304). Learn about its features, operating instructions, technical specifications, and safety guidelines for capturing your adventures.

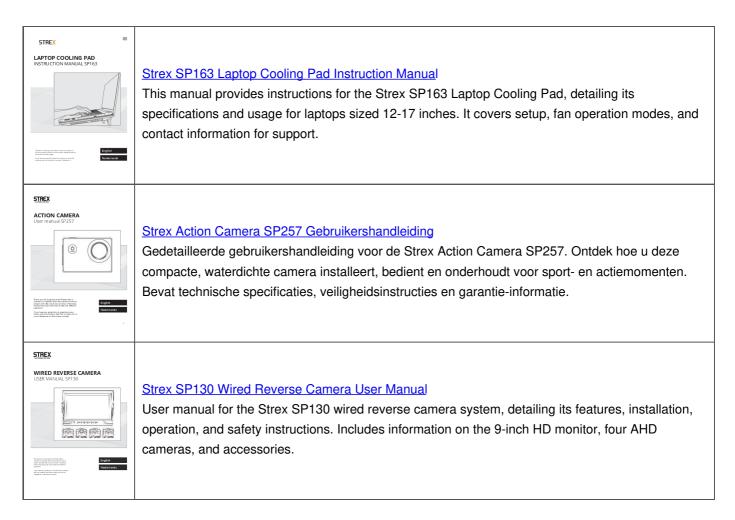


Documents - Strex - SP66



Strex Industrial Screen Endoscope User Manual SP66/SP116

User manual for the Strex Industrial Screen Endoscope (Models SP66/SP116). Features include a 4.3-inch LCD screen, 1080P video, IP67 waterproof camera, and 5-hour battery life. Suitable for various inspection tasks in hard-to-reach areas. lang:en score:34 filesize: 172.93 K page_count: 18 document date: 2021-05-02




[pdf] User Manual Instructions

Bekijk de handleiding en veiligheidsinformatie Strex Inspectiecamera met Scherm 10M 1080P HD 4 3 inch LCD scherm IP67 bol original media s q0q74Doj4AEG |||

SCREEN ENDOSCOPE User manual **SP66**/SP116 Thank you for choosing Strex Please take a moment to carefully read the manual to ensure proper and safe use of your product. Following these instructions will ensure safe and efficient operation. If you have any questions or experience any issues with the p...

lang:nl score:23 filesize: 485.1 K page count: 44 document date: 2025-05-08



[pdf] User Manual Instructions

Bekijk de handleiding en veiligheidsinformatie Strex Inspectiecamera met Scherm 5M 1080P HD 4 3 inch LCD scherm IP67 Waterdicht bol original media s xEAn4kmLkMRn |||

SCREEN ENDOSCOPE User manual **SP66**/SP116 Thank you for choosing Strex Please take a moment to carefully read the manual to ensure proper and safe use of your product. Following these instructions will ensure safe and efficient operation. If you have any questions or experience any issues with the p...

lang:nl score:23 filesize: 485.1 K page_count: 44 document date: 2025-05-08



[pdf]

Bekijk de handleiding Strex Inspectiecamera Hoes Geschikt voor SP66 SP116 Endoscoop 5M 10M bol original media s q8n501gVrqm $2 \parallel \parallel$

...

lang:nl score:14 filesize: 44.27 K page_count: 1 document date: 2022-08-30



[pdf]

Untitled Bekijk de CE markering Strex Inspectiecamera Hoes Geschikt voor SP66 SP116 Endoscoop 5M 10M bol original media s BEmpJRmXkK7J |||

...

lang:nl score:13 filesize: 425.85 K page count: 1 document date: 2022-08-30