

[manuals.plus](#) /

- › [RL LIVE YOUR LIGHT](#) /
- › [Reality Leuchten Atria R67042832 LED Ceiling Light User Manual](#)

## RL LIVE YOUR LIGHT R67042832

# Reality Leuchten Atria R67042832 LED Ceiling Light User Manual

Model: R67042832 | Brand: RL LIVE YOUR LIGHT



## 1. PRODUCT OVERVIEW

The Reality Leuchten Atria R67042832 is an LED ceiling light designed for modern indoor spaces. It features a plastic white/black finish with a starlight effect and a diameter of 27 cm. This light includes an energy-saving 10.5 watt LED, providing up to 1080 lumens for optimal illumination. It offers dimmable brightness and adjustable light color, ranging from 3000 Kelvin (warm white) to 6000 Kelvin (cold white), all controllable via the included remote control.

Key features include:

- Integrated 10.5 Watt LED with 1080 lumens.
- Dimmable brightness via remote control.
- Adjustable color temperature (3000K - 6000K).
- Starlight effect for ambient lighting.
- Night light function.



Image 1.1: Front view of the Reality Leuchten Atria R67042832 LED Ceiling Light.

## 2. SAFETY INSTRUCTIONS

---

Please read these safety instructions carefully before installation and operation. Failure to follow these instructions may result in electric shock, fire, or other injuries.

- **Electrical Safety:** Installation must be performed by a qualified electrician or in accordance with local electrical codes. Always disconnect power at the main circuit breaker before installation, maintenance, or cleaning.
- **Handling:** Handle the light fixture with care to avoid damage. Do not drop or subject it to strong impacts.
- **Environment:** This product is designed for indoor use only. Do not expose to moisture, extreme temperatures, or corrosive environments.
- **Cleaning:** Use a soft, dry cloth for cleaning. Do not use abrasive cleaners or solvents.
- **Light Source:** The LED light source is integrated and not user-replaceable. Do not attempt to disassemble the LED module.
- **Disposal:** This product contains a light source of energy efficiency class F. Dispose of the product responsibly at the end of its life cycle, in accordance with local regulations for electronic waste.

## 3. PACKAGE CONTENTS

---

Verify that all components are present and undamaged before proceeding with installation.

- 1 x Reality Leuchten Atria R67042832 LED Ceiling Light Fixture
- 1 x Remote Control
- Mounting Hardware (screws, wall anchors)
- 1 x User Manual (this document)

## 4. SETUP AND INSTALLATION

---

Follow these steps for safe and proper installation of your ceiling light.

### 1. Prepare for Installation:

- Ensure the power supply to the installation area is turned off at the main circuit breaker.
- Gather necessary tools: screwdriver, drill (if needed), wire strippers, ladder.

## 2. Mounting the Bracket:

- Identify the mounting location on the ceiling.
- Attach the mounting bracket securely to the ceiling using the provided screws and wall anchors. Ensure it is firmly fixed to a joist or suitable ceiling support.

## 3. Electrical Connection:

- Connect the household electrical wires to the corresponding wires on the light fixture. Typically, this involves connecting live (L), neutral (N), and ground (GND) wires. Refer to local wiring color codes.
- Ensure all connections are secure and insulated.

## 4. Attaching the Light Fixture:

- Carefully align the light fixture with the mounted bracket and secure it in place.
- The large lamp cover/shade can be detached and reattached with a simple twisting motion for easier installation and cleaning.

## 5. Restore Power:

- Once the light is securely installed and wired, restore power at the main circuit breaker.
- Test the light using the remote control.

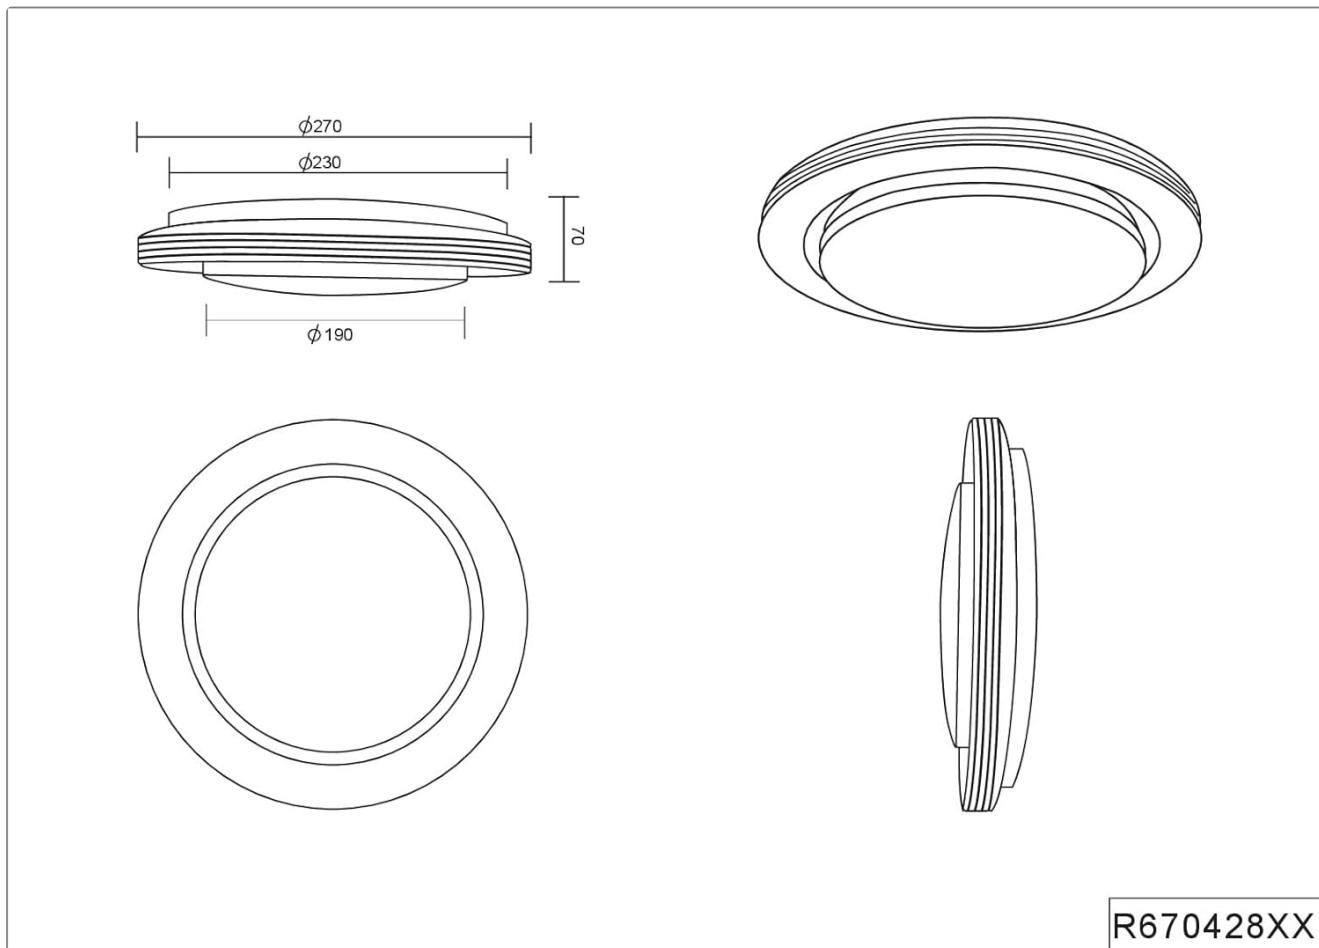


Image 4.1: Technical drawing showing dimensions (Diameter 270mm, Height 70mm) for installation planning.

## 5. OPERATING INSTRUCTIONS

Your Reality Leuchten Atria ceiling light comes with a remote control for convenient operation of its various functions.



Image 5.1: Visual representation of key features: Remote control, dimming, color temperature adjustment, night light, and starlight effect.

- **Power On/Off:** Use the dedicated power button on the remote control to turn the light on or off.
- **Brightness Adjustment (Dimming):** The brightness can be freely adjusted from 100% down to a low level using the dimming buttons or slider on the remote control.



Image 5.2: The light can be adjusted from warm white (left) to cool white (right).

- **Color Temperature Adjustment:** The light color can be freely adjusted from 3000 Kelvin (warm white) to 6000 Kelvin (cold white) using the corresponding buttons or slider on the remote control.
- **Starlight Effect:** Activate the starlight effect for a subtle, sparkling ambiance. This feature creates small, twinkling points of light.



Image 5.3: The ceiling light displaying its starlight effect.

- **Night Light Function:** Press the night light button. If the main lighting was on, it will slowly dim and turn off. Pressing the button again will turn the light completely off. This function is ideal for low-light situations.

## 6. MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your LED ceiling light.

- **Cleaning:**
  - Before cleaning, ensure the light is turned off and has cooled down.

- Wipe the surface of the light fixture with a soft, dry, lint-free cloth.
- For stubborn marks, a slightly damp cloth can be used, followed by a dry cloth. Do not use harsh chemicals, abrasive cleaners, or sprays directly on the fixture.
- The large lamp cover/shade can be easily removed by a simple twisting motion for thorough cleaning.

• **LED Longevity:** The integrated LED has an average service life of 30,000 hours. No replacement of the light source is necessary under normal operating conditions.

## 7. TROUBLESHOOTING

If you encounter issues with your ceiling light, refer to the following common problems and solutions.

Problem	Possible Cause	Solution
Light does not turn on.	No power supply; loose wiring; remote control battery depleted.	Check circuit breaker. Ensure wiring connections are secure (power off first!). Replace remote control batteries.
Remote control not working.	Batteries depleted or incorrectly inserted; remote not paired (if applicable); obstruction.	Replace batteries, ensuring correct polarity. Ensure no obstructions between remote and light. Refer to remote pairing instructions (if provided with remote).
Light flickers or dims unexpectedly.	Unstable power supply; loose connection; incompatible dimmer (not applicable as it uses its own remote).	Check power supply stability. Verify wiring connections.
Color temperature or brightness cannot be adjusted.	Remote control issue; internal malfunction.	Ensure remote control batteries are fresh. If problem persists, contact customer support.

If the problem persists after attempting these solutions, please contact customer support.

## 8. SPECIFICATIONS

Attribute	Detail
Model Number	R67042832
Brand	RL LIVE YOUR LIGHT
Manufacturer	Reality Leuchten
Product Dimensions	27 x 27 x 7 cm (Diameter x Diameter x Height)
Weight	385 g
Material	Plastic
Color	White/Black (Ring Black)

Attribute	Detail
Light Source	Integrated LED
Wattage	10.5 Watt
Lumen Output	Max. 1080 lumens
Color Temperature	3000 Kelvin (warm white) to 6000 Kelvin (cold white)
Dimmable	Yes, via included remote control
Average Service Life	30,000 hours
Energy Efficiency Class	F
Indoor/Outdoor Use	Indoor
Power Source	AC

## 9. WARRANTY AND SUPPORT

For warranty information, please refer to the specific terms and conditions provided by Reality Leuchten or your point of purchase. Typically, products are covered against manufacturing defects for a specified period.

If you require technical assistance, have questions about your product, or need to report a defect, please contact the manufacturer or your retailer. Keep your proof of purchase handy when contacting support.

**Manufacturer:** Reality Leuchten

**Website:** [www.reality-leuchten.de](http://www.reality-leuchten.de) (Please note: This is a general placeholder website for the manufacturer, actual support contact may vary by region.)

© 2023 RL LIVE YOUR LIGHT. All rights reserved.

This manual is subject to change without notice. Please visit the manufacturer's website for the latest version.