

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

### Philco PES3515-BK

## Philco Stereo Shelf System User Manual

Model: PES3515-BK

### INTRODUCTION

Thank you for purchasing the Philco Stereo Shelf System. This compact audio system features a tray-loading CD player, digital FM radio, Bluetooth streaming, and USB input, offering versatile audio playback options. Please read this manual carefully before operating the unit to ensure proper use and to maximize its performance. Keep this manual for future reference.



The Philco Stereo Shelf System, showcasing its main unit, two detachable speakers, and the included remote control. This system is designed for compact spaces while delivering clear audio.

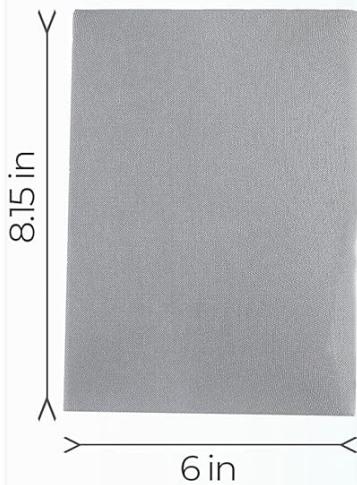
### WHAT'S IN THE Box

Before you begin, please check the contents of the package to ensure all items are present and undamaged:

- Philco Stereo Shelf System Main Unit
- Two (2) Speakers

- Remote Control
- Power Cord
- User Guide (this manual)

## WHAT'S IN THE BOX



### CD PLAYER



### REMOTE



### POWER CORD

An illustration detailing the components included in the Philco Stereo Shelf System package, along with their approximate dimensions for reference.

## SETUP

### 1. Placement

Place the main unit and speakers on a stable, flat surface. Ensure there is adequate ventilation around the unit. Avoid placing it near heat sources, direct sunlight, or in humid environments.

### 2. Connecting Speakers

Connect the speaker wires from each speaker to the corresponding speaker terminals on the rear of the main unit. Ensure the polarity (+ to + and - to -) is correct for optimal sound quality.

### 3. Power Connection

Plug the power cord into the AC IN jack on the rear of the main unit, then plug the other end into a standard AC wall outlet (120V ~ 60Hz).

### 4. Remote Control Battery Installation

Open the battery compartment on the back of the remote control. Insert two AAA batteries (not included), ensuring the correct polarity (+ and -). Close the battery compartment securely.

## OPERATING INSTRUCTIONS



**PHILCO** **PES3515-BK**  
**STEP EXECUTIVE SHELF SYSTEM**  
CD Player - USB Playback

The image shows the Philco PES3515-BK Step Executive Shelf System. It consists of a central black control unit with a digital display showing '1205' and various buttons for volume, source selection (CD, USB), and playback controls (PLAY, PAUSE, STOP). This unit is flanked by two large, light-colored speakers. A remote control is shown in the foreground, featuring a digital display and several control buttons. Below the main image, five hexagonal icons represent the system's features: CD-R/RW Player, MP3/USB, Digital FM Radio, Aux Input, and Bluetooth Transmit.

- CD-R/RW PLAYER**
- MP3 - USB**
- DIGITAL FM RADIO**
- AUX INPUT**
- BLUETOOTH TRANSMIT**

A detailed view of the Philco Stereo Shelf System's front panel, highlighting the various controls and the digital display for easy operation.

## General Controls

- **POWER Button:** Press to turn the unit ON or OFF.
- **VOLUME Knob:** Rotate clockwise to increase volume, counter-clockwise to decrease.
- **SOURCE Button:** Press repeatedly to cycle through input modes: CD, USB, FM, Bluetooth, AUX.
- **LCD Display:** Shows current mode, track information, radio frequency, and time.

## CD Player Operation

1. Press the **SOURCE** button to select CD mode.
2. Press the **OPEN/CLOSE** button to open the CD tray.
3. Place a CD (Audio CD, CD-R/RW) with the label side facing up into the tray.
4. Press the **OPEN/CLOSE** button again to close the tray. The unit will read the disc.
5. Press the **PLAY/PAUSE (▶ /--)** button to start or pause playback.
6. Press the **SKIP (▶▶)** or **SKIP (◀◀)** buttons to skip to the next or previous track. Hold to fast forward/rewind.
7. **PROGRAM Function:** In stop mode, press **PROG/MEM** to program tracks for playback.

## FM Radio Operation

1. Press the **SOURCE** button to select FM mode.
2. Extend the FM antenna for better reception.
3. **Auto Scan:** Press the **AUTO SCAN** button to automatically scan and save available FM stations.
4. **Manual Tuning:** Press the **TUNE +/-** buttons to manually tune to a desired frequency.
5. **Preset Stations:** Use the **PRESET +/-** buttons to navigate through saved stations.

## Bluetooth Streaming

1. Press the **SOURCE** button to select Bluetooth mode. The display will show "BT" and flash, indicating it's ready for pairing.
2. On your Bluetooth-enabled device (smartphone, tablet, etc.), enable Bluetooth and search for new devices.
3. Select "PHILCO PES3515-BK" from the list of available devices.
4. Once paired, the unit will emit a confirmation tone, and the "BT" indicator will stop flashing.
5. You can now play audio from your device through the stereo system. Use your device or the system's controls for playback.

## USB Playback

1. Insert a USB flash drive into the USB port on the front of the unit.
2. Press the **SOURCE** button to select USB mode.
3. The unit will automatically detect and begin playing compatible audio files (e.g., MP3).
4. Use the **PLAY/PAUSE** and **SKIP** buttons for playback control.

## AUX Input

1. Connect an external audio device (e.g., MP3 player, smartphone) to the **AUX IN** port on the front of the unit using a 3.5mm audio cable (not included).
2. Press the **SOURCE** button to select AUX mode.
3. Play audio from your connected device. The volume can be controlled via the stereo system or the external device.

## MAINTENANCE

### Cleaning

To clean the unit, use a soft, dry cloth. For stubborn stains, dampen the cloth slightly with water. Do not use abrasive cleaners, waxes, or solvents as they may damage the finish. Ensure the unit is unplugged before cleaning.

### Storage

If the unit is not used for an extended period, unplug it from the power outlet. Store it in a cool, dry place, away from direct sunlight and extreme temperatures.

### Safety Precautions

- Do not block any ventilation openings.
- Do not expose the unit to rain or moisture.
- Do not open the casing. Refer all servicing to qualified personnel.
- Keep the unit away from strong magnetic fields.

## TROUBLESHOOTING

If you encounter any issues with your Philco Stereo Shelf System, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No Power	Power cord not securely connected; Power outlet not active.	Ensure power cord is firmly plugged into the unit and a working wall outlet. Try a different outlet.
No Sound	Volume too low; Speakers not connected properly; Incorrect source selected.	Increase volume. Check speaker connections and polarity. Ensure correct input source is selected.
CD Not Playing	CD inserted incorrectly; Disc is dirty or scratched; Disc format not supported.	Re-insert CD with label side up. Clean the disc with a soft cloth. Ensure it's an Audio CD, CD-R, or CD-RW.
Bluetooth Not Connecting	Unit not in pairing mode; Device too far; Bluetooth on device is off.	Ensure unit is in Bluetooth mode and flashing. Move device closer. Turn Bluetooth on your device ON.
Poor FM Reception	Antenna not extended; Interference.	Fully extend the FM antenna. Try repositioning the unit or antenna.

## SPECIFICATIONS

Feature	Specification
Model Number	PES3515-BK
Product Dimensions (L x W x H)	9.57 x 21.02 x 7.13 inches
Item Weight	7.17 pounds
Total RMS Output	15W (2 x 7.5W)
Connectivity Technology	Bluetooth, USB, AUX
Disc Compatibility	Audio CD, CD-R/RW
Radio Tuner	Digital FM
Headphone Jack	3.5mm
Color	Silver




## WARRANTY AND SUPPORT

Philco products are designed and manufactured to the highest quality standards. For information regarding warranty coverage, terms, and conditions, please refer to the warranty card included with your product or visit the official Philco website. For technical support, troubleshooting assistance beyond this manual, or service inquiries, please contact Philco customer support through the contact information provided on the official website or your product's packaging.

*Please retain your proof of purchase for warranty purposes.*

© 2023 Philco. All rights reserved.

## Related Documents

	<p><a href="#">Philco PBB3010BT Bluetooth CD Boombox Owner's Manual</a></p> <p>Comprehensive owner's manual for the Philco PBB3010BT Bluetooth CD Boombox, detailing safety precautions, operation of CD, Bluetooth, Radio, and USB functions, specifications, and warranty information.</p>
	<p><a href="#">Philco PBC2010BT Bluetooth CD Boombox Owner's Manual</a></p> <p>Comprehensive owner's manual for the Philco PBC2010BT Bluetooth CD Boombox with Cassette &amp; AM/FM Radio. Includes safety instructions, features, operation guides for CD, cassette, Bluetooth, and radio, troubleshooting, specifications, and warranty information.</p>
	<p><a href="#">Philco PAR1018BT-GR 1.8" Dual Alarm Clock Radio with USB Charging and Bluetooth - Owner's Manual</a></p> <p>Owner's manual for the Philco PAR1018BT-GR 1.8" Dual Alarm Clock Radio. This manual provides safety instructions, control locations, setup guides for clock, alarm, sleep timer, USB charging, Bluetooth pairing, AUX IN operation, FM radio listening, troubleshooting, specifications, and warranty information.</p>
	<p><a href="#">Philco PH2740IC Induction Hob: Instruction and Installation Manual</a></p> <p>Comprehensive guide for the Philco PH2740IC Induction Hob, covering safety, installation, operation, features, troubleshooting, and maintenance. Learn how to use your induction cooktop safely and efficiently.</p>

Documents - Philco – PES3515-BK

**SDoC Attestation Letter**

To: Federal Communications Commission  
7435 Oakland Mills Road  
Columbia, MD  
FCC ID: 2AB4KMETYH8212  
Product description: Step Executive BT Shelf System  
Type designation: MET8212, PES3515, PES3515-BK, PES3515-WH, PES3530, PES3530-BK, PES3530-WH, PES3530-XXXXX, PES3550, PES3550-BK, PES3550-WH, PES3550-XXXXX where XXXXX denote any printable characters in the ASCII Standard Character Table to represent variances in cosmetics or buyers.  
Trademark: MET, PES  
To Whom It May Concern:  
Has been the units used for conducting FCC compliance testing, the SDoC part will be tested by EMTEK (SHENZHEN) CO., LTD.  
If you have any question or concerns, pls. contact us.

Clien's Signature:  
  
TONY LAM  
Date: 2022.9.8  
MET INDUSTRIAL LTD

[\[pdf\]](#)

Date siemic FCC SDOC MET INDUSTRIAL LTD METYH8212 2AB4KMETYH8212 metyh8212  
SDoC Attestation Letter To: Federal Communications Commission 7435 Oakland  
Mills Road Columbia, MD FCC ID: 2AB4KMETYH8212 Product description: Step  
Executive BT Shelf System Type designation: MET8212, PES3515, **PES3515-BK**,  
PES3515-WH, PES3515-XXXXX, PES3530, PES3530-BK, PES3530-WH, PES3530-  
XXXXX, PES...

lang:en **score:21** filesize: 83.38 K page\_count: 1 document date: 2022-09-09



**TEST REPORT**

Product Name : Step Executive BT Shelf System  
MET8212, PES3515, PES3515-BK, PES3515-WH,  
PES3530, PES3530-BK, PES3530-WH, PES3550, PES3550-BK,  
PES3550-WH, PES3550-XXXXX, PES3550-BK, PES3550-WH, PES3550-XXXXX  
Model Number : XXXXX denote any printable characters in the ASCII  
Standard Character Table to represent variances in cosmetics or buyers.  
FCC ID : 2AB4KMETYH8212

Prepared for : MET INDUSTRIAL LTD  
Address : Room 805, 8/F, No. 9 Wing Hong Street, Lai Chi Kok,  
Kowloon, Hong Kong

Prepared by : EMTEK (SHENZHEN) CO., LTD.  
Address : Building 69, Majakong Industry Zone, Nanshan District,  
Shenzhen, Guangdong, China  
Tel: (0755) 26954280  
Fax: (0755) 26954280

Report Number : ENS220815H169W00201R  
Date(s) of Tests : August 16, 2022 to September 5, 2022  
Date of Issue : September 6, 2022

[\[pdf\]](#) Test Report

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT for Test Report part1 MET INDUSTRIAL  
LTD METYH8212 2AB4KMETYH8212 metyh8212

**TEST REPORT** Product Name Step Executive BT Shelf System MET8212, PES3515,  
**PES3515-BK**, PES3515-WH, PES3515-XXXXX, PES3530, PES3530-BK, PES3530-  
WH, PES3530-XXXXX, PES3550, Model Number PES3550-BK, PES3550-WH,  
PES3550-XXXXX where XXXXX denote any printable characters in the ASCII  
Standard Charac...

lang:tl **score:17** filesize: 5.18 M page\_count: 36 document date: 2022-09-15