Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Oraimo OEB-E50D

Oraimo Necklace 4 Bluetooth Neckband Wireless Earphones User Manual

Model: OEB-E50D

1. Introduction

This manual provides instructions for the proper use and maintenance of your Oraimo Necklace 4 Bluetooth Neckband Wireless Earphones. Please read this manual thoroughly before use to ensure optimal performance and longevity of the device.

Package Contents:

- Oraimo Necklace 4 Bluetooth Neckband
- 2 Pairs Replacement Silicone Ear Tips (various sizes)
- Type-C Charging Cable
- User Manual



Image: The Oraimo Necklace 4 Bluetooth Neckband Earphones, showcasing the neckband design and in-ear earbuds.

2. Setup

2.1 Charging the Earphones

Before first use, fully charge the earphones. Connect the provided Type-C charging cable to the charging port on the neckband and to a compatible USB power source. The indicator light will show charging status and turn off or change color when fully charged.

Note:

- A 10-minute charge provides approximately 10 hours of playback.
- A full charge provides up to 50 hours of playtime.



Image: Illustration demonstrating the fast charging capability of the Oraimo Necklace 4, showing '10 Mins Charge = 600 Mins Playback'.



Image: Graphic highlighting the 50-hour playtime feature of the Oraimo Necklace 4 earphones.

2.2 Powering On/Off

- **Power On:** Separate the magnetic earbuds. The earphones will automatically power on.
- **Power Off:** Clip the magnetic earbuds together. The earphones will automatically power off.



Image: Diagram illustrating the magnetic lock feature of the earbuds, showing how clipping them together powers off the device and separating them powers it on.

2.3 Bluetooth Pairing

1. Ensure the earphones are powered on and in pairing mode (indicator light will flash).
2. On your device (smartphone, tablet, etc.), enable Bluetooth.
3. Search for "Oraimo Necklace 4" in the list of available Bluetooth devices.
4. Select "Oraimo Necklace 4" to connect. Once connected, the indicator light will stop flashing.

2.4 Dual Device Connection

The Oraimo Necklace 4 supports connection to two devices simultaneously. To connect a second device:

1. Connect the earphones to the first device as described in 2.3.
2. Long press the 'O' button and the '+' button on the neckband simultaneously for 2 seconds to enter pairing mode for the second device.

3. On the second device, search for and connect to "Oraimo Necklace 4".



Image: Visual guide demonstrating how to connect the Oraimo Necklace 4 to two devices simultaneously, showing two smartphones connected to the neckband.

3. Operating Instructions

3.1 Controls

The neckband features inline controls for managing audio and calls:

- **Volume Up (+):** Short press to increase volume.
- **Volume Down (-):** Short press to decrease volume.
- **Multi-function Button (O):**
  - Play/Pause: Single press.
  - Answer/End Call: Single press.

- Reject Call: Long press.
- Activate Voice Assistant: Double press.

- **Mode Button (M):** Short press to switch between Normal Mode and HavyBass Mode.

3.2 HavyBass 2.0 Mode

The HavyBass 2.0 algorithm provides an enhanced bass experience. Activate this mode by pressing the 'M' button.

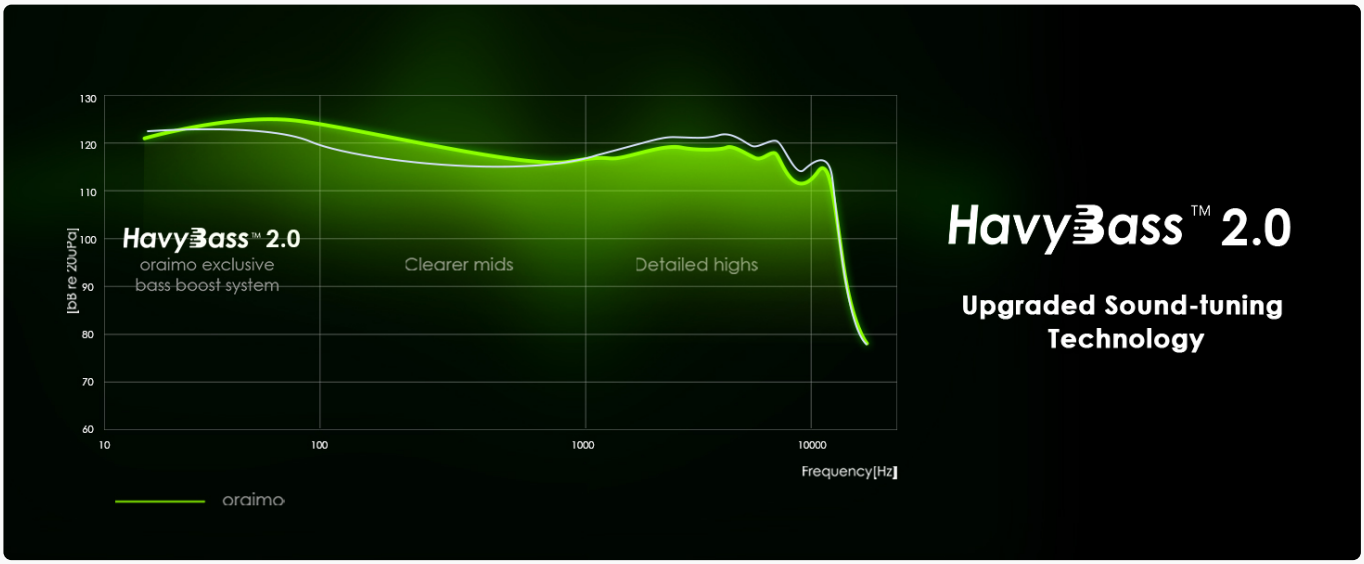


Image: A frequency response graph illustrating the enhanced bass and sound profile provided by Oraimo's HavyBass 2.0 technology.



Image: Diagram showing the internal components of an earbud and the control button layout, indicating how to switch between Normal Mode and HavyBass Mode using the 'M' button.

3.3 Low-latency Game Mode

For a synchronized audio and video experience during gaming or video playback, activate the Low-latency Game Mode. Refer to the device controls for activation (usually a specific button combination or long press).



Image: Graphic depicting the low-latency game mode feature, showing a gamer character and the earphones connected to a smartphone, emphasizing audio and video synchronization.

3.4 Environmental Noise Cancellation (ENC) for Calls

The Necklace 4 incorporates a proprietary noise-cancelling algorithm and an inline microphone to reduce surrounding noise, ensuring clear voice transmission during calls.



Image: A user making a call with the Oraimo Necklace 4, with an overlay illustrating how Environmental Noise Cancellation (ENC) technology filters out ambient noise for clearer communication.

4. Maintenance

4.1 Cleaning

- Wipe the earphones with a soft, dry cloth.
- Do not use abrasive cleaners or solvents.
- Regularly clean the ear tips to prevent wax buildup.

4.2 Storage

When not in use, store the earphones in a cool, dry place away from direct sunlight and extreme temperatures. The magnetic lock feature helps prevent tangling and provides convenient storage.

4.3 Water and Sweat Resistance (IPX5)

The Oraimo Necklace 4 is rated IPX5 for water resistance, meaning it can withstand splashes and sweat. It is not designed for submersion in water.



Image: The Oraimo Necklace 4 neckband and earbuds shown with water droplets, illustrating its IPX5 waterproof capability.

5. Troubleshooting

Problem	Possible Cause	Solution
Cannot power on	Low battery; Earbuds not separated	Charge the earphones; Separate the magnetic earbuds.
Cannot pair with device	Bluetooth not enabled; Earphones not in pairing mode; Device too far	Ensure Bluetooth is on; Power cycle earphones to enter pairing mode; Move device closer (within 10 meters).

Problem	Possible Cause	Solution
No sound	Volume too low; Not connected; Incorrect audio output selected	Increase volume on earphones and device; Reconnect earphones; Select "Oraimo Necklace 4" as audio output on your device.
Poor call quality	Environmental noise; Microphone obstructed	Ensure microphone is clear; Move to a quieter environment.

6. Specifications

- **Model Name:** Necklace 4
- **Model Number:** OEB-E50D
- **Connectivity:** Bluetooth 5.3
- **Wireless Range:** Up to 10 meters
- **Playtime:** Up to 50 hours
- **Charging Time:** Approximately 1 hour (for full charge)
- **Fast Charge:** 10 minutes charge for 10 hours playback
- **Water Resistance:** IPX5
- **Audio Driver Type:** Dynamic Driver
- **Microphone:** Built-In, with ENC Technology
- **Control Type:** Volume Control, Touch
- **Special Features:** Dual EQ (Normal/HavyBass), Low-latency Game Mode, Dual Device Pairing, Magnetic Lock
- **Item Weight:** 100 grams
- **Product Dimensions:** 17.5 x 22 x 3.4 cm
- **Battery:** 1 Lithium Ion battery (included)

7. Warranty and Support

7.1 Warranty Information

This product comes with a**1 Year Warranty** from the date of purchase. Please retain your proof of purchase for warranty claims. The warranty covers manufacturing defects but does not cover damage caused by misuse, accidents, or unauthorized modifications.

7.2 Customer Support

For technical assistance or warranty inquiries, please contact Oraimo Customer Care:

- **Customer Care Number:** 1800 419 0525

© 2023 Oraimo. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0BTXZF3JW

More documents and user manuals: **https://manuals.plus/**