

Delupet DT-66

Delupet DT-66 Electronic Dog Training Collar User Manual

Model: DT-66 | Brand: Delupet

1. INTRODUCTION

The Delupet DT-66 Electronic Dog Training Collar is designed to assist in correcting undesirable behaviors in dogs through a combination of beep, vibration, and static stimulation modes. This manual provides comprehensive instructions for safe and effective use of the device, ensuring a positive training experience for both you and your dog.

2. SAFETY INFORMATION

- This training collar is intended for use with healthy dogs only. Do not use on aggressive, sick, or injured dogs. Consult a veterinarian if unsure.
- Do not leave the collar on your dog for more than 12 hours per day to prevent skin irritation.
- Regularly check your dog's neck for signs of irritation or sores. If irritation occurs, discontinue use until the skin heals.
- Always start with the lowest stimulation level and gradually increase as needed, observing your dog's reaction.
- Ensure proper fit of the collar. It should be snug enough for the contact points to touch the skin, but not so tight as to restrict breathing.
- Keep the remote control out of reach of children.

3. PACKAGE CONTENTS

Verify that all items are present in your package:

- Delupet DT-66 Receiver Collar
- Remote Control
- Security Keypad Lock (integrated into remote)
- USB Charging Cable
- Long and Short Contact Points
- Conductive Silicone Caps for Contact Points
- Test Light Tool
- User Manual (this document)



Image: The DeluPet DT-66 receiver collar and its accompanying remote control.

4. PRODUCT OVERVIEW

The DeluPet DT-66 system consists of a compact receiver collar and an intuitive remote control. The receiver is designed to be waterproof (IPX7) and durable, while the remote features a clear digital screen and dedicated buttons for each training mode.

4.1 Receiver Collar

- **Contact Points:** Deliver static stimulation. Choose between short and long points based on your dog's coat length. Conductive silicone caps can be used for vibration and beep modes to prevent direct skin contact with metal prongs.
- **Power Button:** Turns the receiver on/off.
- **Charging Port:** USB-C for convenient charging.

- **Adjustable Strap:** Fits neck sizes from 8 to 24.4 inches, suitable for dogs over 10 lbs. The strap can be adjusted and cut to size.

4.2 Remote Control

- **Digital Screen:** Displays battery level, training mode, intensity level, and active channel.
- **Mode Buttons:** Separate buttons for Beep, Vibration, and Static Stimulation.
- **Intensity Adjustment Buttons:** Adjusts the level of vibration or static stimulation.
- **Channel Button:** Allows switching between up to 4 different receiver collars.
- **Security Lock:** Prevents accidental activation of modes.

5. SETUP

5.1 Charging the Devices

Before first use, fully charge both the receiver collar and the remote control.

1. Connect the USB charging cable to the charging ports on both the receiver and the remote.
2. Plug the other end into a USB power source (e.g., phone adapter, computer USB outlet, power bank, car charger). **Note:** Do not use an adapter with power greater than 5V1A.
3. Charging typically takes about 2 hours. The battery indicator on the remote will show full, and the receiver's indicator light will change when fully charged.

A full charge provides up to 35 days of standby time for the receiver and 45 days for the remote.

Long Lasting Battery Life & USB Charging



USB Power Strip



Computer



Power Bank



Power Adapter



45 UP TO
DAYS

Remote standby
time

35 UP TO
DAYS

Receiver standby
time

Type C Charging Port
Charge your training collar
anytime and anywhere

Image: Illustration of the USB-C charging port and battery life for the remote and receiver.

5.2 Attaching Contact Points

Select the appropriate contact points (short for short-haired dogs, long for long-haired dogs) and screw them firmly into the receiver. For vibration and beep modes, you may use the conductive silicone caps over the metal contact points for added comfort.

5.3 Fitting the Collar


Proper fit is crucial for the collar's effectiveness and your dog's comfort.

1. Place the receiver on the top of your dog's neck, with the contact points touching the skin.
2. Adjust the strap so it is snug, but not too tight. You should be able to fit two fingers comfortably between the strap and your dog's neck.
3. The collar is adjustable and can be cut to fit neck sizes from 8 to 24.4 inches.

Adjustable Collar for All Dogs from 10-110 lbs



* Adjustable and can be cut off

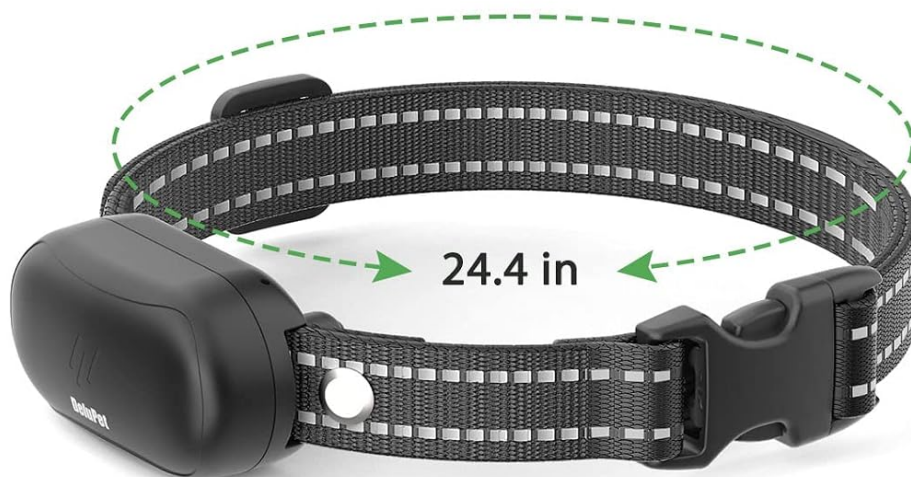

Durable Buckle

Image: Visual guide for adjusting the collar to fit various dog sizes, highlighting the 24.4-inch maximum length.

5.4 Powering On/Off

- **Receiver:** Press and hold the power button on the receiver until the indicator light turns on/off.
- **Remote:** Press and hold the power button on the remote until the screen illuminates/shuts off.

6. OPERATING INSTRUCTIONS

The Delupet DT-66 offers three safe and effective training modes:

3 TRAINING MODES



Image: Depiction of the three training modes: Beep, Shock, and Vibrate, with their respective icons.

6.1 Training Modes

- **Beep Mode:** Produces an audible tone. Often used as a warning before other stimulations.
- **Vibrate Mode:** Delivers a vibration. Adjustable from 1 to 3 levels.
- **Static Stimulation (Shock) Mode:** Provides a static pulse. Adjustable from 0 to 99 levels. Use with caution and at the lowest effective level.

6.2 Using the Remote Control

1. **Unlock the Remote:** Slide the security keypad lock to unlock the remote and prevent accidental presses.
2. **Select Mode:** Press the corresponding button for Beep, Vibrate, or Static Stimulation.
3. **Adjust Intensity:** Use the up/down buttons on the side of the remote to adjust the intensity level for Vibration (1-3) or Static Stimulation (0-99).
4. **Activate Stimulation:** Press the large lightning bolt button to deliver the selected stimulation.
5. **Channel Selection:** If training multiple dogs, press the channel button to switch between the 4 available channels. The

remote has a memory function for settings per channel.

6.3 Effective Range

The remote control has an effective range of up to 1600 feet (approximately 487 meters) in open areas, allowing for training both indoors and outdoors.



Image: Examples of undesirable dog behaviors that can be corrected using the training collar, such as biting, fighting, barking, jumping, chasing, and digging.

7. MAINTENANCE

7.1 Waterproof Receiver

The receiver collar is IPX7 waterproof, meaning it can withstand immersion in water up to 1 meter for 30 minutes. This makes it suitable for dogs playing in water or during rainy conditions. Ensure the charging port cover is securely closed before exposing to water.



IPX7 WATERPROOF

Dogs can play freely in the water with a collar



Image: A dog swimming, illustrating the IPX7 waterproof capability of the collar for activities like swimming, rainy days, and bathing.

7.2 Cleaning and Care

- Regularly clean the receiver and contact points with a damp cloth.
- Inspect the collar strap for wear and tear. The collar straps can be replaced if needed.
- Ensure the contact points are clean and free of debris to maintain proper conductivity.

Collar Straps Can Be Replaced

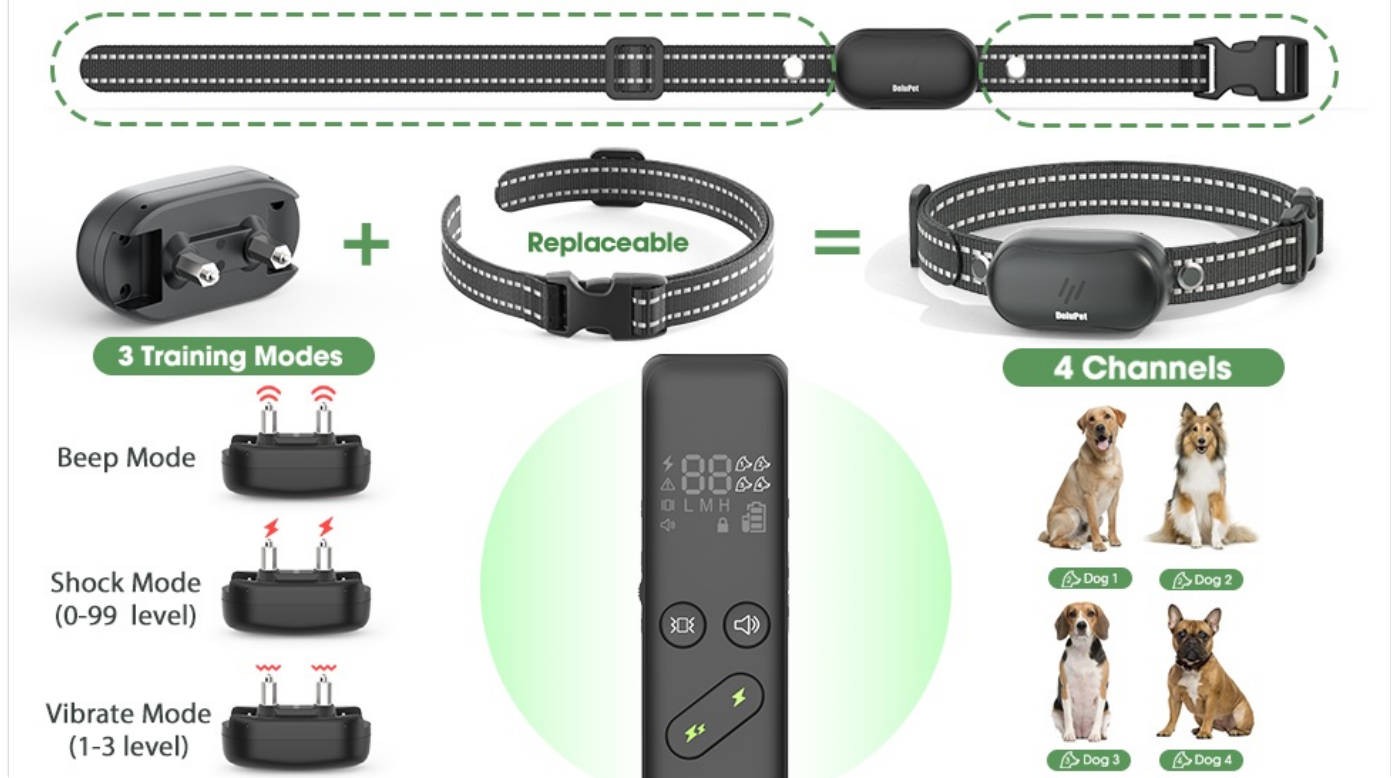


Image: Diagram showing how the collar strap can be detached and replaced from the receiver unit.

7.3 Battery Preservation

To maximize battery life, avoid overcharging and store the devices in a cool, dry place when not in use for extended periods.

8. TROUBLESHOOTING

- **Collar not responding:** Ensure both the remote and receiver are powered on and fully charged. Check if they are paired correctly (refer to pairing instructions if needed, though typically pre-paired). Verify the remote's security lock is disengaged.
- **No static stimulation/vibration:** Ensure contact points are making proper skin contact. Adjust the intensity level. Test with the provided test light tool for static stimulation.
- **Short battery life:** Ensure devices are fully charged. Avoid leaving them on when not in use. Battery performance may decrease over time.
- **Skin irritation:** Remove the collar immediately. Clean the dog's neck and the contact points. Ensure proper collar fit and do not leave the collar on for more than 12 hours. Consult a veterinarian if irritation persists.

9. SPECIFICATIONS

Feature	Specification
Brand	Delupet
Model	DT-66
Training Modes	Beep, Vibrate (1-3 levels), Static Stimulation (0-99 levels)
Remote Range	Up to 1600 feet
Waterproof Rating	IPX7 (Receiver)

Neck Size Compatibility	8 - 24.4 inches (for dogs over 10 lbs)
Battery Life (Standby)	Receiver: Up to 35 days; Remote: Up to 45 days
Charging Time	Approx. 2 hours
Material	Resin, Silicone, Thermoplastic Polyurethane
Item Weight	9.1 ounces
Color	Black

10. WARRANTY AND SUPPORT

For warranty information, technical support, or any questions regarding your Delupet DT-66 training collar, please refer to the contact information provided on the product packaging or visit the official Delupet website. Our customer service team is available to assist you.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question