Verbatim 49591

Verbatim Portable Touchscreen Monitor 14" User Manual

Model: 49591

Product Overview

The Verbatim Portable Touchscreen Monitor is designed to extend your digital workspace, offering a second screen solution for laptops, smartphones, tablets, and portable gaming systems. Its compact and versatile design makes it an ideal companion for both work and leisure, enabling enhanced productivity and entertainment on the go.



Image: The Verbatim 14-inch Portable Touchscreen Monitor, showcasing its sleek design and Full HD 1080p IPS display.

Key Features:

- **14-inch Full HD (1080p) IPS Display:** Provides clear and vibrant visuals with wide viewing angles.
- **10-Point Touch Functionality:** Enables intuitive interaction, supporting multi-touch gestures for seamless navigation.
- **Versatile Connectivity:** Features USB-C and HDMI ports for broad compatibility with various devices. A single USB-C connection can provide both display and power (device must support DisplayPort Alt Mode and power delivery).
- **Durable Metal Housing:** Ensures robust construction for portability and longevity.
- **Built-in Adjustable Kickstand:** Offers flexible viewing angles for optimal comfort.
- **Wide Compatibility:** Supports Android, Windows 11/10/8, and MacOS platforms. *Note: Touchscreen functionality is not supported by iOS/iPadOS.*
- **Audio Jack:** Allows connection of headphones or external speakers.
- **Neoprene Protective Sleeve:** Included for safe transport.

Setup Guide

This section details the steps to connect your Verbatim Portable Touchscreen Monitor to various devices.

Connecting to a Laptop/PC (USB-C):

1. Ensure your laptop's USB-C port supports DisplayPort Alt Mode and power delivery.
2. Connect one end of the provided USB-C to USB-C cable to a compatible USB-C port on your laptop.
3. Connect the other end of the USB-C to USB-C cable to either USB-C port (USB-C1 or USB-C2) on the monitor.
4. The monitor should automatically detect the signal and display your laptop's screen. If not, adjust display settings on your laptop.

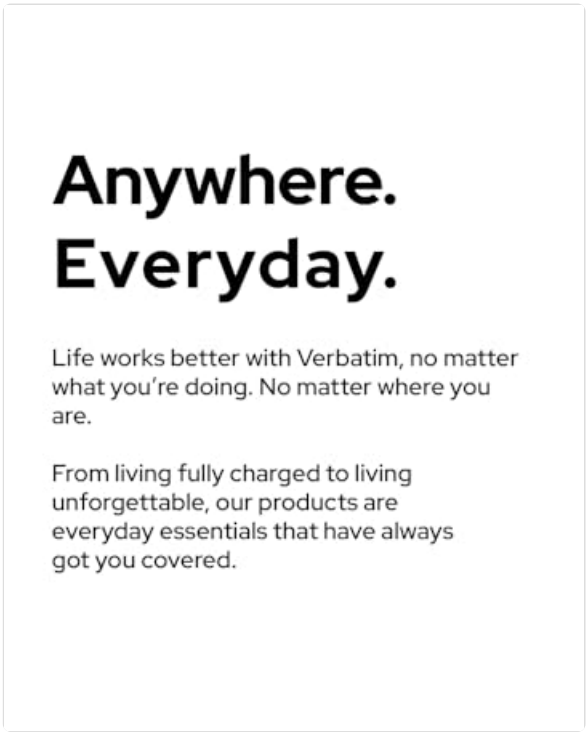


Image: Detailed diagram illustrating the various ports on the Verbatim Portable Monitor, including USB-C (C1, C2), HDMI, USB-A, and audio jack.

Note: If your laptop's USB-C port does not provide sufficient power, you may need to connect the monitor to an external power source using the provided USB-A to AC power adapter and USB-A to USB-C cable.

Connecting to a Laptop/PC (HDMI):

1. Connect one end of the provided HDMI to HDMI cable to the HDMI port on your laptop.
2. Connect the other end of the HDMI to HDMI cable to the HDMI port on the monitor.
3. Connect the provided USB-A to USB-C cable from a USB-A port on your laptop (or a power adapter) to a USB-C port (USB-C1 or USB-C2) on the monitor for power.
4. The monitor should display your laptop's screen. Adjust display settings if necessary.

Connecting to a Smartphone/Tablet:

1. For USB-C compatible devices (supporting DisplayPort Alt Mode and power delivery), use the USB-C to USB-C cable to connect directly to the monitor.
2. For devices with other port types (e.g., Lightning), an appropriate adapter (not included) will be required to convert to HDMI or USB-C.
3. Ensure the monitor receives sufficient power, either from the connected device or an external power source.



Image: A smartphone connected to the Verbatim Portable Monitor, demonstrating its use as an extended display for mobile devices.

Connecting to Gaming Consoles:

1. Connect your gaming console to the monitor using an HDMI cable.
2. Provide power to the monitor via a USB-C connection from a power adapter or a compatible USB-A port.
3. Adjust console display settings to match the monitor's resolution (1920x1080).

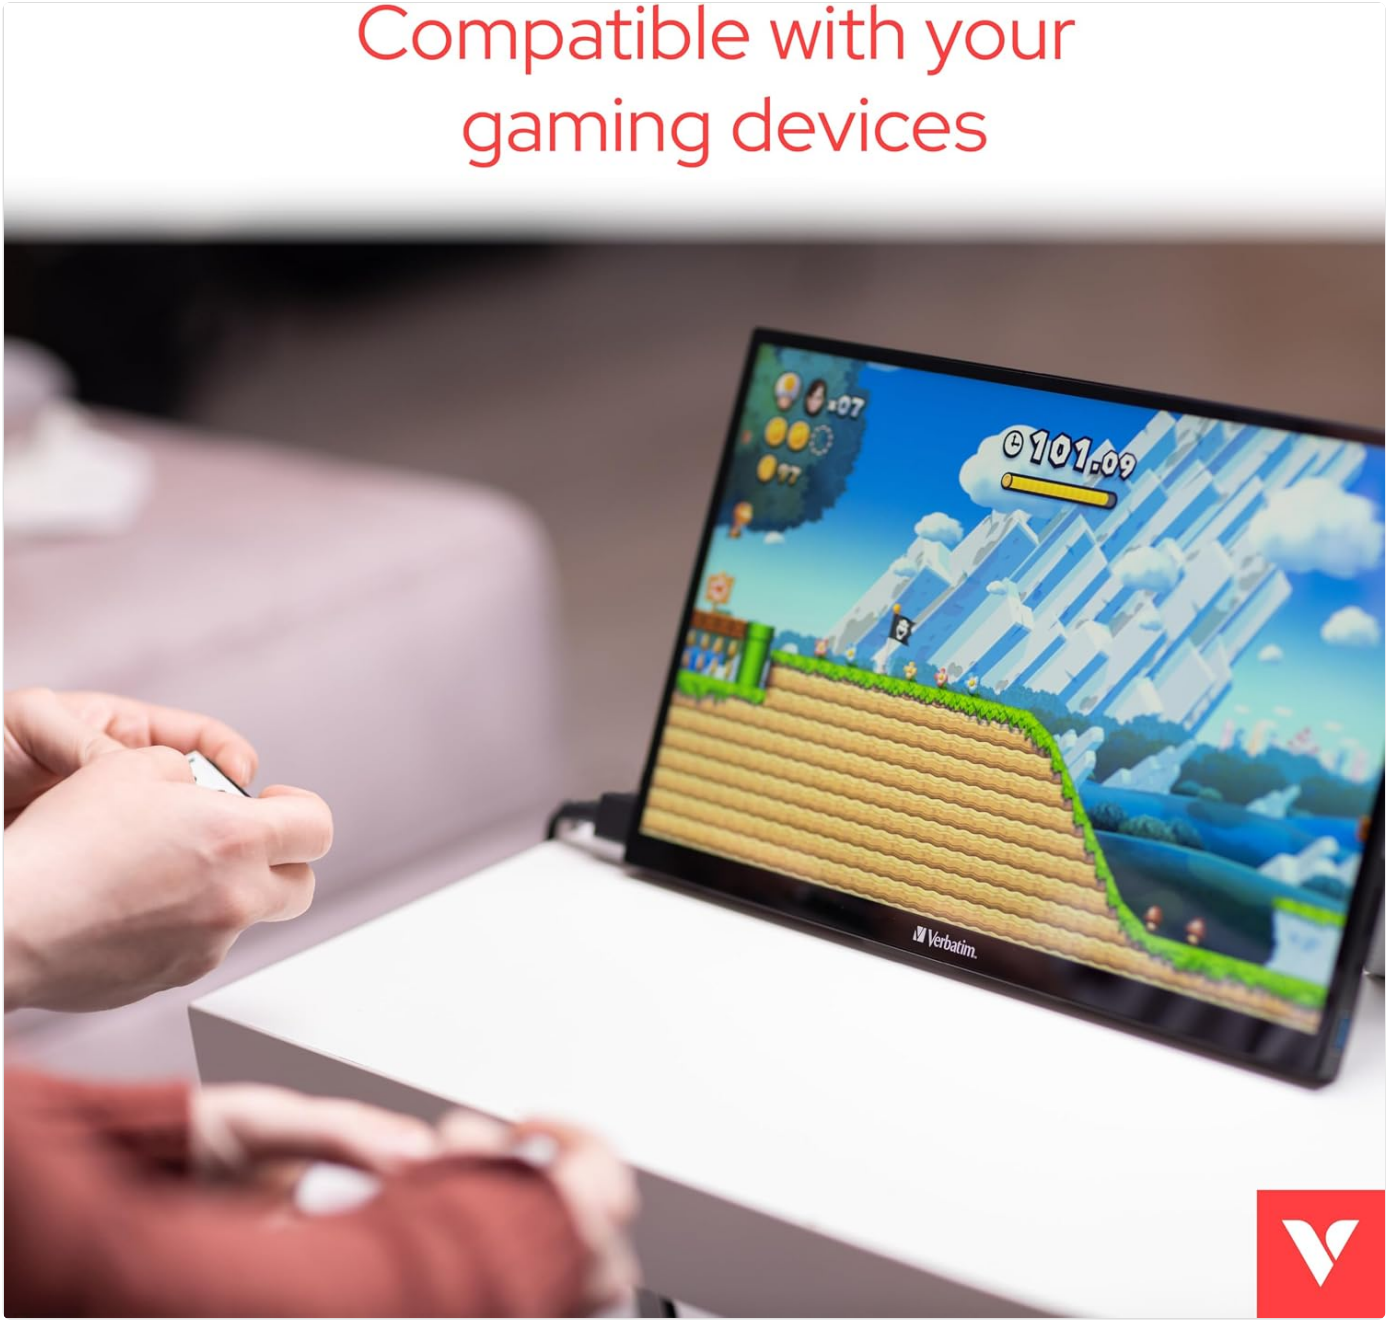


Image: A user engaged in gaming, with the Verbatim Portable Monitor displaying the game, highlighting its compatibility with gaming consoles.

Operating Instructions

Power On/Off and Menu Navigation:

- **Power Button:** Press and hold to power the monitor on or off.
- **Menu Button:** Press to access the On-Screen Display (OSD) menu. Use the navigation buttons (often combined with brightness/volume controls) to move through options.
- **Brightness/Volume Controls:** Dedicated buttons or combined with menu navigation for quick adjustments.

Using the Touchscreen Functionality:

The 10-point capacitive touchscreen allows for intuitive interaction with compatible devices. Simply touch, swipe, pinch, and zoom directly on the monitor's surface.

- Ensure your connected device (laptop, smartphone, tablet) supports touchscreen input over the connected port (typically USB-C).

- For Windows devices, the touchscreen should be automatically recognized. For MacOS, touchscreen functionality is not supported.
- Calibrate the touchscreen if accuracy issues arise through your device's operating system settings.



Image: A user demonstrating the 10-point touchscreen functionality of the Verbatim Portable Monitor, interacting with content displayed from a laptop.

Adjusting the Kickstand:

The integrated kickstand allows for flexible positioning of the monitor. Gently pull out the kickstand from the back of the monitor and adjust it to your desired viewing angle. The kickstand provides stable support in both landscape and portrait orientations.



Image: The Verbatim Portable Monitor positioned on a desk, showcasing its built-in adjustable kickstand for ergonomic viewing.

Video Demonstration:

Your browser does not support the video tag.

Video: An official Verbatim video demonstrating the various uses and features of the portable monitor, including business, gaming, travel, streaming, and home office scenarios.

Maintenance

Cleaning the Monitor:

- Always power off the monitor and disconnect all cables before cleaning.
- Use a soft, lint-free cloth slightly dampened with water or a non-abrasive screen cleaner.
- Do not spray cleaner directly onto the screen. Apply it to the cloth first.
- Avoid using harsh chemicals, abrasive pads, or solvents as they can damage the screen or casing.

Storage:

- When not in use, store the monitor in its provided neoprene protective sleeve to prevent scratches and dust accumulation.
- Store in a cool, dry place away from direct sunlight and extreme temperatures.

Troubleshooting

If you encounter issues with your Verbatim Portable Touchscreen Monitor, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No Signal / Black Screen	Incorrect cable connection, insufficient power, incompatible port.	Ensure all cables (USB-C, HDMI, power) are securely connected. Verify your device's USB-C port supports DisplayPort Alt Mode and power delivery. Connect the monitor to an external power source if your device cannot provide enough power. Check your device's display settings to ensure the external monitor is detected and configured correctly (e.g., Extend, Duplicate).
Touchscreen Not Responding	Incompatible operating system, incorrect connection, driver issue.	Confirm your operating system supports touchscreen functionality with external monitors (e.g., Windows supports, MacOS does not). Ensure the USB-C connection is fully functional for data and touch. For Windows, check Device Manager for touchscreen drivers and update if necessary. Restart both the monitor and the connected device.
Flickering Screen	Loose cable, power fluctuations, incompatible resolution/refresh rate.	Reseat all cables. Ensure a stable power supply. Adjust the display resolution and refresh rate on your connected device to match the monitor's specifications (1920x1080).
No Audio from Monitor	Audio output settings, volume level.	Check the volume level on the monitor and your connected device. Ensure the audio output is set to the Verbatim monitor in your device's sound settings. If using headphones, ensure they are properly plugged into the monitor's audio jack.

Specifications

Feature	Detail
Standing screen display size	14 Inches

Feature	Detail
Screen Resolution	1920x1080
Max Screen Resolution	1920 x 1080 Pixels
Number of USB 2.0 Ports	1
Number of USB 3.0 Ports	1
Brand	Verbatim
Series	Verbatim Portable Touchscreen Monitor 14" USB-C HDMI FHD 1080p IPS Display
Item model number	49591
Item Weight	2.18 pounds
Product Dimensions	0.02 x 12.68 x 7.64 inches
Item Dimensions LxWxH	0.02 x 12.68 x 7.64 inches
Color	Black
Computer Memory Type	DIMM
Voltage	20 Volts
Manufacturer	Verbatim Americas LLC
ASIN	B0BVKY9CW7
Country of Origin	China
Date First Available	August 24, 2023
Screen Size	14 Inches
Resolution	FHD 1080p
Aspect Ratio	16:9
Screen Surface Description	Glossy

Warranty and Support

Verbatim guarantees this product with a**2-year limited warranty**. For technical support or warranty claims, please refer to the official Verbatim support channels.

For a comprehensive user guide in PDF format, please visit:Verbatim Portable Monitor User Guide (PDF)

© 2024 Verbatim. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question

and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question