

ANYPLUS HT-006-07R

ANYPLUS 7-in-1 USB C Hub Multiport Adapter

INSTRUCTION MANUAL

Model: HT-006-07R

Introduction

The ANYPLUS 7-in-1 USB C Hub Multiport Adapter is designed to expand the connectivity of your USB-C enabled devices. This versatile docking station provides essential ports for enhanced productivity and entertainment, including 4K HDMI output, high-speed USB 3.0 data transfer, SD/TF card reading, and 100W Power Delivery charging. It offers a plug-and-play solution for a seamless experience across various operating systems and devices.

Key Features

- **7-in-1 Connectivity:** Extends your device's USB-C port to include 4K HDMI, 100W PD Charging, SD/TF 3.0 card reader, and 3 USB-A 3.0 ports.
- **4K HDMI Output:** Supports vivid 4K UHD or Full HD 1080p video streaming to HDTVs, monitors, or projectors at 30Hz.
- **High-Speed Data Transfer:** Three USB 3.0 ports offer data transfer speeds up to 5Gbps, ideal for connecting external drives, keyboards, and mice.
- **100W Power Delivery:** Allows for fast charging of your laptop or host device while using other hub functions.
- **Universal Card Reader:** Built-in SD and TF slots provide easy access to files from various memory card formats (SD, SDHC, Micro SD, MMC, SDXC). Note: Supports single card reading at a time.
- **Wide Compatibility:** Compatible with laptops, tablets, and mobile phones featuring a full-featured USB Type-C port, supporting Mac OS, Windows, Chrome OS, Android, iOS, and Linux.
- **Plug and Play:** No software drivers or external power supply (for basic functions) required for immediate use.

Package Contents


- 1 x ANYPLUS 7-in-1 USB C Hub Multiport Adapter

- 1 x User Manual

Product Overview

Familiarize yourself with the various ports and components of your ANYPLUS USB C Hub.

7 IN 1 USB C HUBS

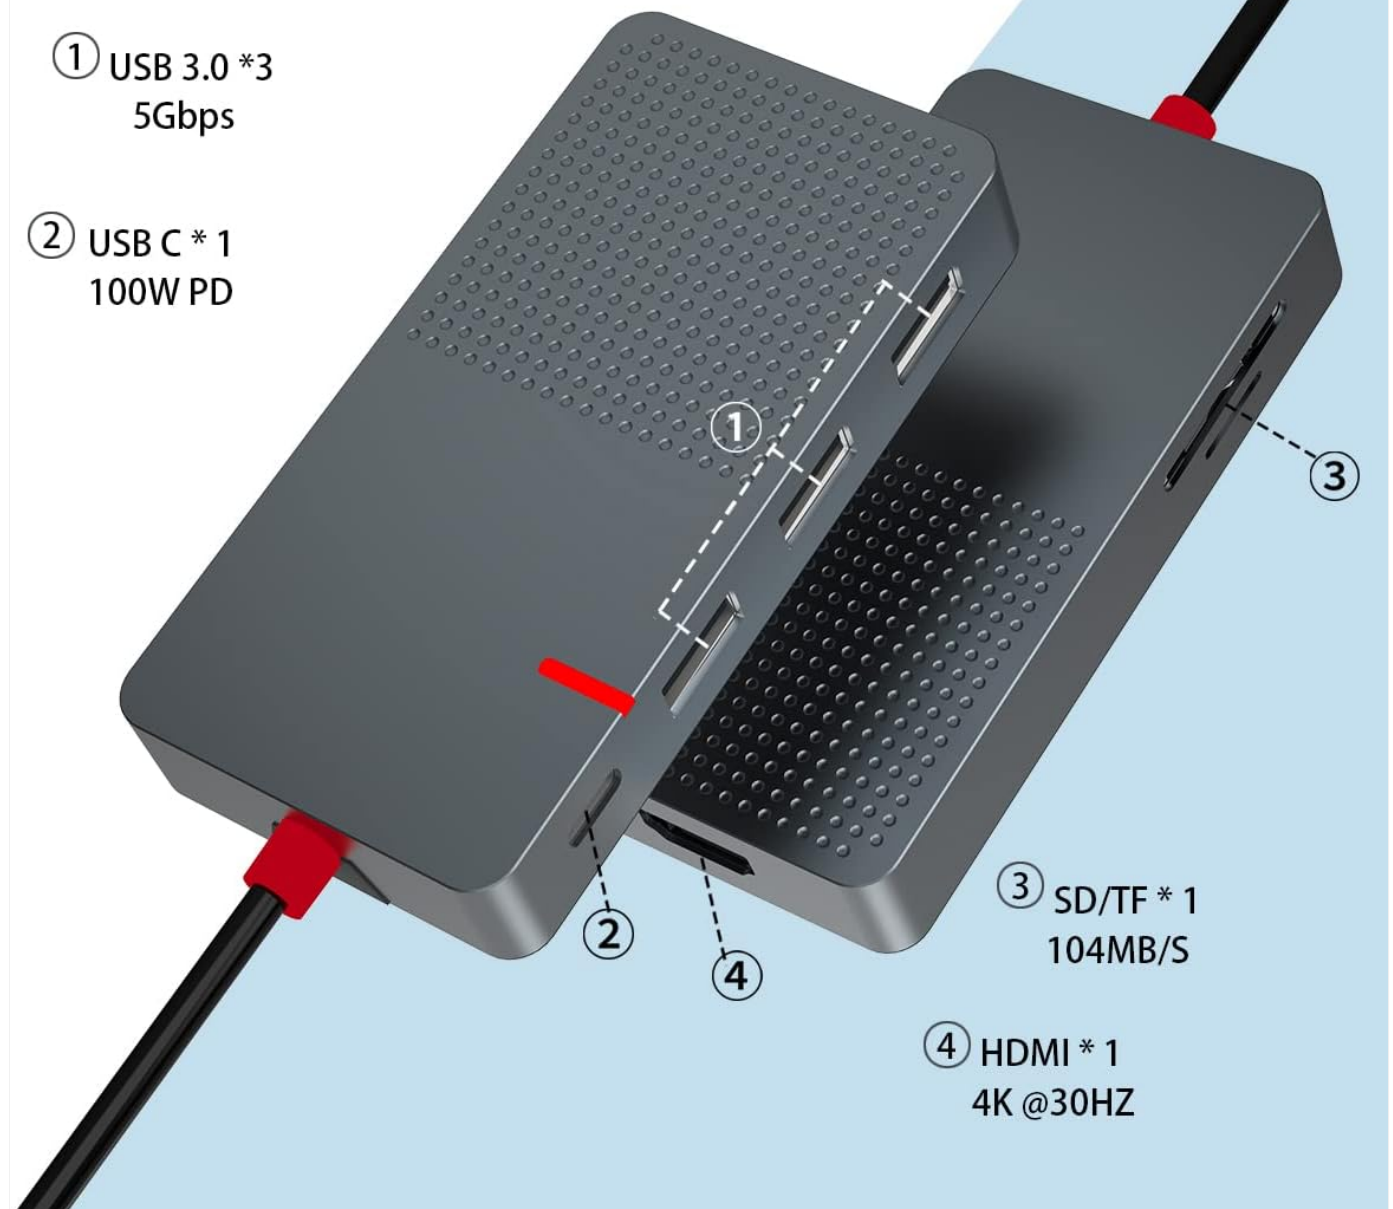

This diagram illustrates the layout and function of each port on the hub.


- **USB-C Input Cable:** Connects to your host device (laptop, tablet, phone).
- **HDMI Port (4K@30Hz):** For connecting to external displays.
- **USB-C PD Port (100W):** For power input to charge your host device.
- **USB 3.0 Ports (x3, 5Gbps):** For connecting USB peripherals like flash drives, keyboards, mice.
- **SD Card Slot:** For standard SD memory cards.

- **TF (Micro SD) Card Slot:** For Micro SD memory cards.

Setup

Setting up your ANYPLUS USB C Hub is straightforward. Follow these steps for optimal performance:

1. **Connect the Hub to Your Device:** Plug the USB-C input cable of the hub into a full-featured USB-C port on your laptop, tablet, or smartphone.
2. **Connect Peripherals:** Once the hub is connected, you can begin plugging in your desired peripherals into the corresponding ports on the hub.
 - For HDMI display, connect an HDMI cable from the hub to your monitor/TV.
 - For USB devices, insert them into the USB 3.0 ports.
 - For memory cards, insert them into the SD or TF slots.
 - For charging your host device, connect a USB-C power adapter to the hub's 100W PD port.
3. **Verify Connection:** Your operating system should automatically detect the connected devices. No additional drivers are typically required.

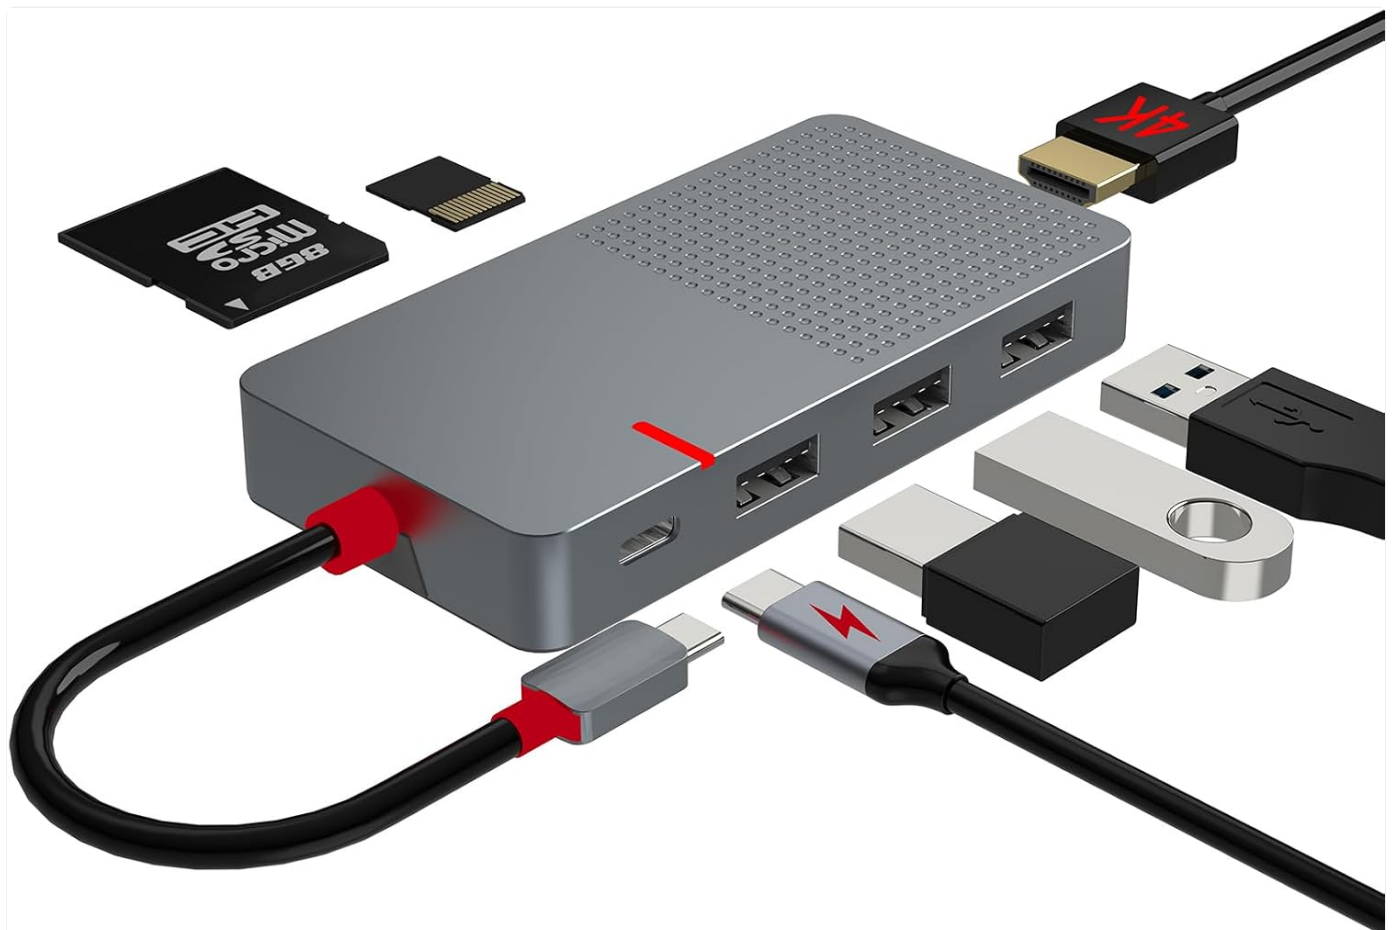

The hub connected to a laptop with various peripherals, demonstrating its multi-functionality.

Operating Instructions

This section details how to use each function of your ANYPLUS USB C Hub.

HDMI Video Output

Connect an HDMI cable from the hub's HDMI port to your external display. Your device should automatically detect the monitor. You can then configure display settings (mirror or extend) through your operating system's display preferences.



Enjoy 4K resolution on a larger screen for work or entertainment.

USB 3.0 Data Transfer

Plug your USB devices (e.g., flash drives, external hard drives, keyboards, mice) into the three USB 3.0 ports. These ports support data transfer speeds of up to 5Gbps, ensuring quick file transfers and responsive peripheral use.

SD/TF

480MB/S

Supports single card single reading



Micro SD
micro SDHC
Micro SDXC



SDHC
SDXC
RS-MMC
SD Card
MMC Micro



Connect multiple USB devices simultaneously for expanded functionality.

SD/TF Card Reading

Insert your SD or Micro SD (TF) card into the corresponding slot. The hub supports various card formats and allows for quick access to your photos, videos, and other files. Note that only one card can be read at a time.

4K HDMI Connect Big-Screen Monitor





Easily transfer data from your camera's memory cards.

100W Power Delivery (PD) Charging

To charge your host device through the hub, connect your original USB-C power adapter to the hub's 100W PD port. This allows you to power your laptop while simultaneously using the hub's other functions.

Light & Slim

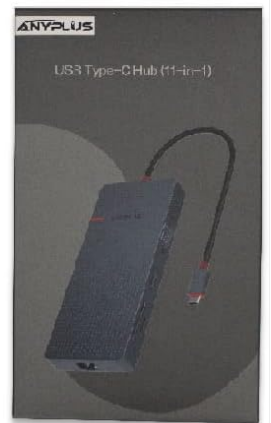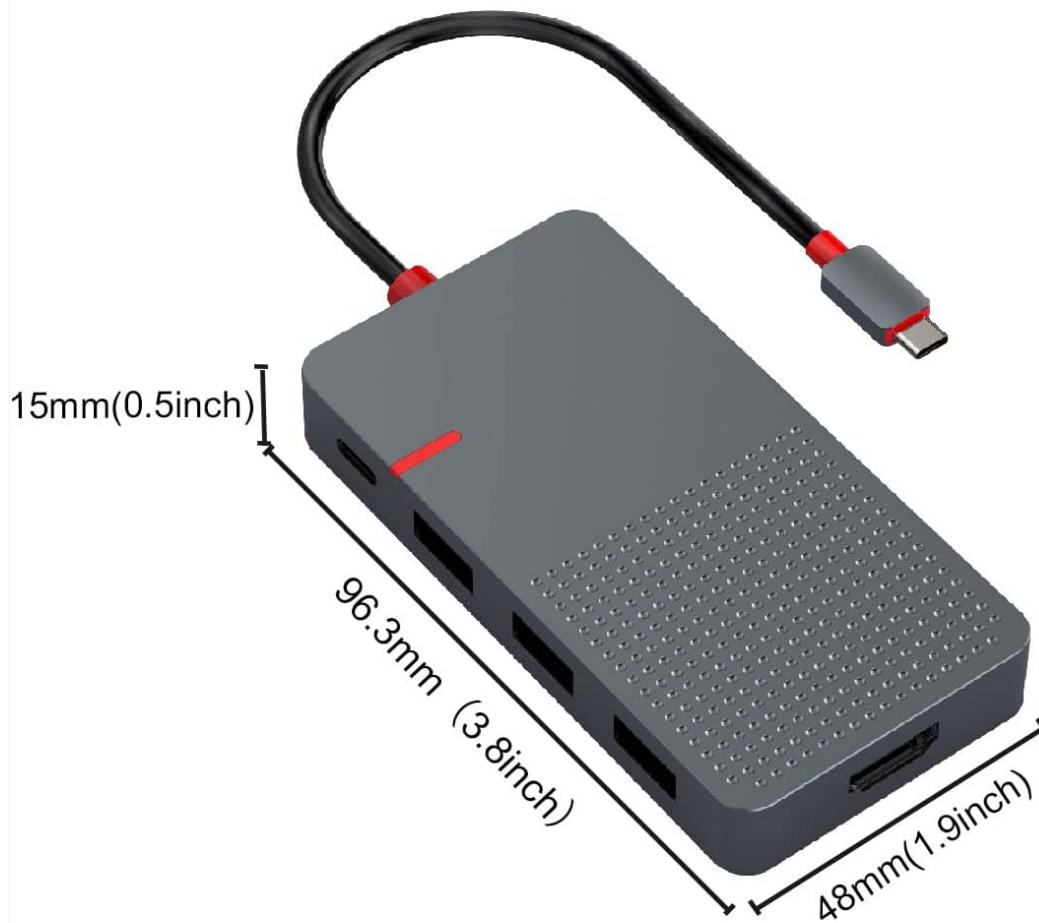

Maintain power to your laptop while expanding its connectivity.

Compatibility

The ANYPLUS 7-in-1 USB C Hub is designed for broad compatibility with devices featuring a full-featured USB Type-C port that supports DisplayPort Alternate Mode, charging, and data transfer protocols.

Compatible Operating Systems:

- Mac OS (including M1/M2 chips)
- Windows (10/8/7/Vista/XP)
- Chrome OS
- Android
- iOS
- Linux

Compatible Devices (Examples):

- MacBook Pro / Air M1, iMac, iPad Pro / Air M1
- Dell XPS, Dell Latitude 7370
- Asus Zenbook
- Huawei, HP, Lenovo
- Microsoft Surface Pro 7/Pro 7+/8, Surface Go/G02/Go 3, Surface Book 2
- Samsung Galaxy S series, Note series
- Nintendo Switch, Xbox, PS4 (for display output where supported)



The hub offers intelligent, drive-free plug-and-play functionality across multiple operating systems.

Intelligent drive-free



Mac OS



Linux系统



Windows



Android

Plug and play for

Windows 10/8/7/Vista/XP, Mac OS X, Linux, Android

It is important to confirm that your laptop's USB-C port supports DisplayPort Alternate Mode and Power Delivery for full functionality.

Maintenance

Proper care and maintenance will ensure the longevity and optimal performance of your ANYPLUS USB C Hub.

- **Cleaning:** Use a soft, dry, lint-free cloth to clean the hub. Avoid using harsh chemicals, cleaning solvents, or strong detergents.
- **Storage:** Store the hub in a cool, dry place away from direct sunlight and extreme temperatures.
- **Handling:** Avoid dropping the device or subjecting it to strong impacts. Do not bend or pull the integrated USB-C cable excessively.
- **Moisture:** Keep the hub away from water and other liquids. If it gets wet, disconnect it immediately and allow it to dry completely before reuse.

Troubleshooting

If you encounter issues with your ANYPLUS USB C Hub, refer to the following common problems and solutions:

- **No display via HDMI:**
 - Ensure the HDMI cable is securely connected to both the hub and the display.
 - Verify that your host device's USB-C port supports DisplayPort Alternate Mode.
 - Try a different HDMI cable or monitor.
 - Restart your host device.
- **USB devices not recognized:**


- Ensure the USB device is fully inserted into the hub's port.
- Try connecting the USB device directly to your host device to confirm it works.
- If it's a high-power USB device, ensure the hub is connected to a power source via the PD port.
- Try a different USB port on the hub.
- **Slow data transfer speeds:**
 - Ensure both the connected USB device and the files being transferred are compatible with USB 3.0 speeds.
 - Avoid connecting multiple high-bandwidth devices simultaneously if performance is critical.
- **Host device not charging via PD port:**
 - Ensure your USB-C power adapter is connected to the hub's PD port and is functioning correctly.
 - Verify that your host device's USB-C port supports Power Delivery input.
 - Check the wattage of your power adapter; some devices require specific power levels.
- **SD/TF card not detected:**
 - Ensure the card is inserted correctly and fully into the slot.
 - Confirm the card format is supported.
 - Only one card (SD or TF) can be read at a time. Remove the other if both are inserted.

Specifications

Feature	Specification
Model Number	HT-006-07R
Product Dimensions	3.9 x 0.6 x 1.9 inches (96.3 x 15 x 48 mm)
Item Weight	2.4 ounces
Color	Grey-7 IN 1
HDMI Output	4K @ 30Hz
USB 3.0 Ports	3 ports, up to 5Gbps data transfer speed
USB-C PD Charging	Up to 100W Power Delivery
Card Reader	SD/TF 3.0 (supports single card reading)
Hardware Interface	HDMI, USB 3.0
Special Feature	Plug and Play

PD 100W Fast charging

Super- speed charging for Notebook

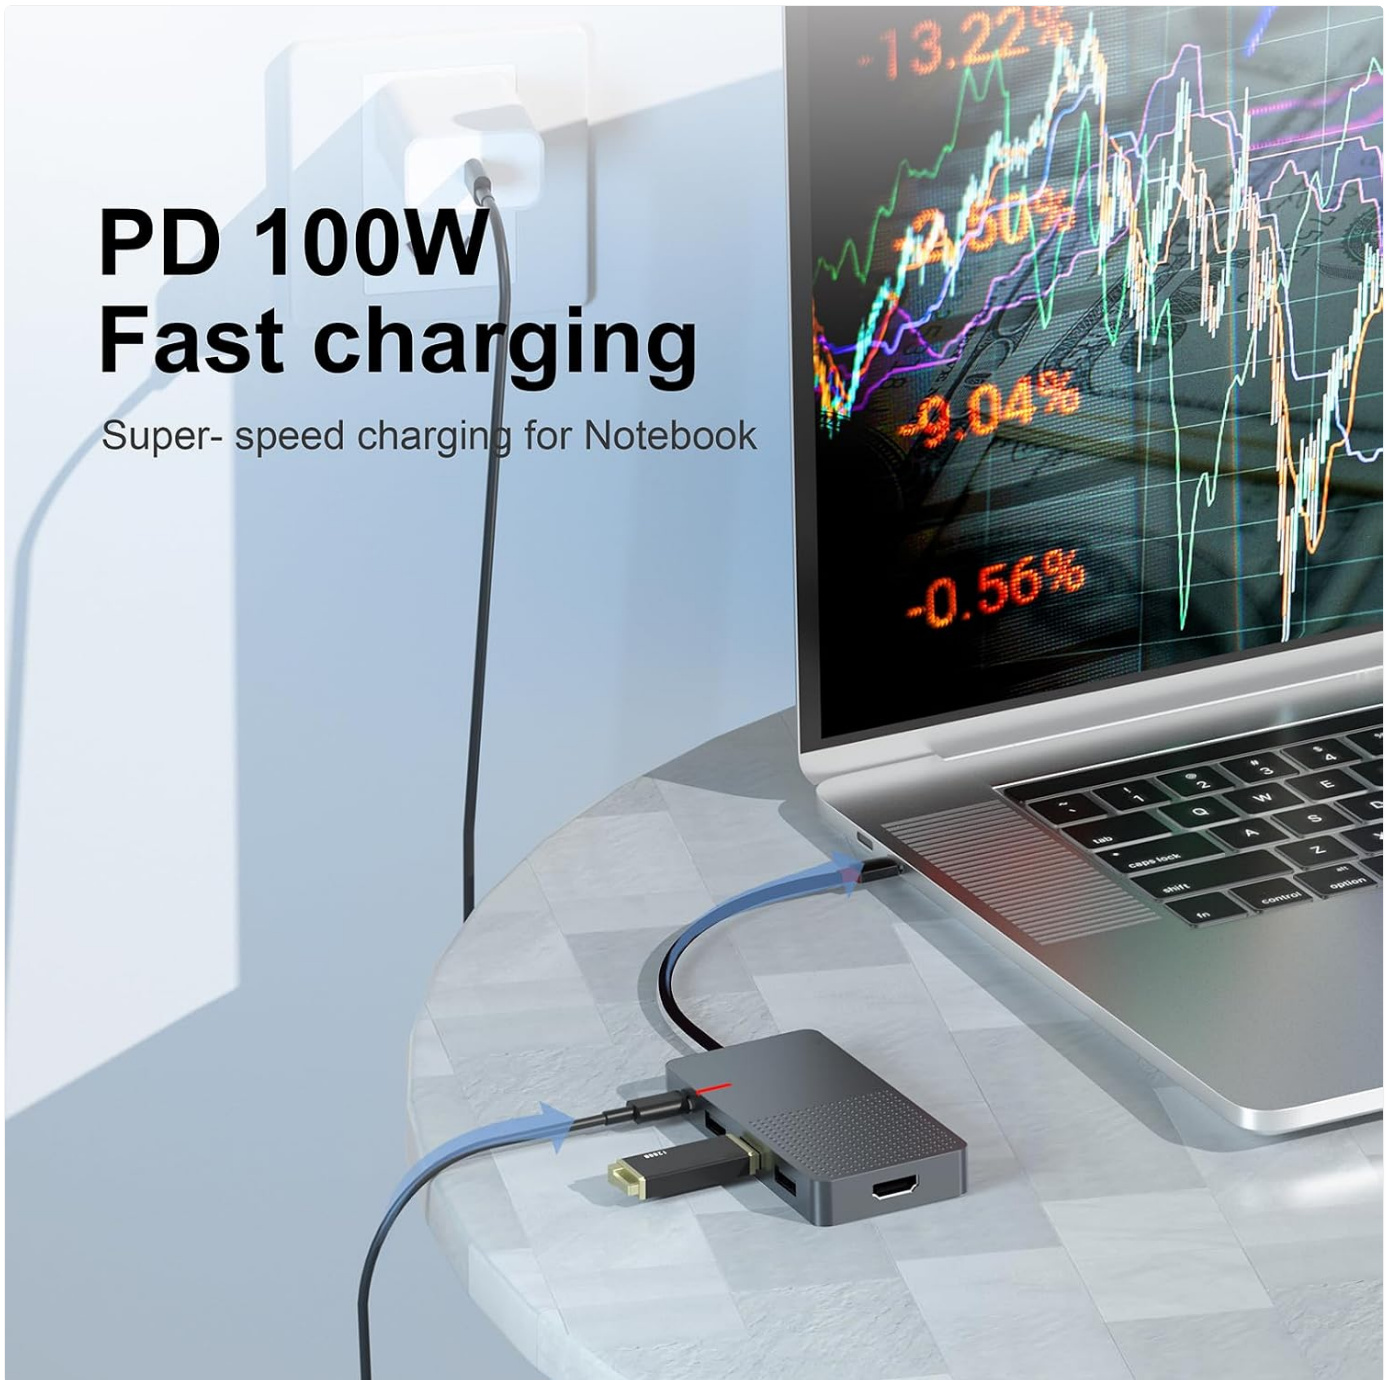

The compact and slim design of the hub makes it highly portable.

Warranty and Support

ANYPLUS is committed to providing high-quality products and excellent customer service. Your ANYPLUS 7-in-1 USB C Hub is backed by our dedicated support team.

If you encounter any issues with your product or have questions, please do not hesitate to contact our customer service. Our professional technical team is available to assist you and will do their best to resolve any problems you may experience.

For specific warranty details and to initiate a support request, please refer to the contact information provided on the product packaging or the official ANYPLUS website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question