

FIFINE A8 PLUS

FIFINE AmpliGame A8 PLUS USB Gaming Microphone User Manual

Model: A8 PLUS

1. INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your FIFINE AmpliGame A8 PLUS USB Gaming Microphone. Please read this manual thoroughly before using the product to ensure optimal performance and longevity.





Image 1.1: The FIFINE AmpliGame A8 PLUS USB Gaming Microphone with its stand and pop filter.

2. WHAT'S IN THE BOX

Verify that all components are present in the package:

- 1 x FIFINE AmpliGame A8 PLUS Gaming Microphone with Base Stand, Shock Mount, and Pop Filter
- 1 x Pivot Mount
- 1 x 6.6ft USB-C to USB-A Cable
- 1 x User Manual

What's In The Box ?

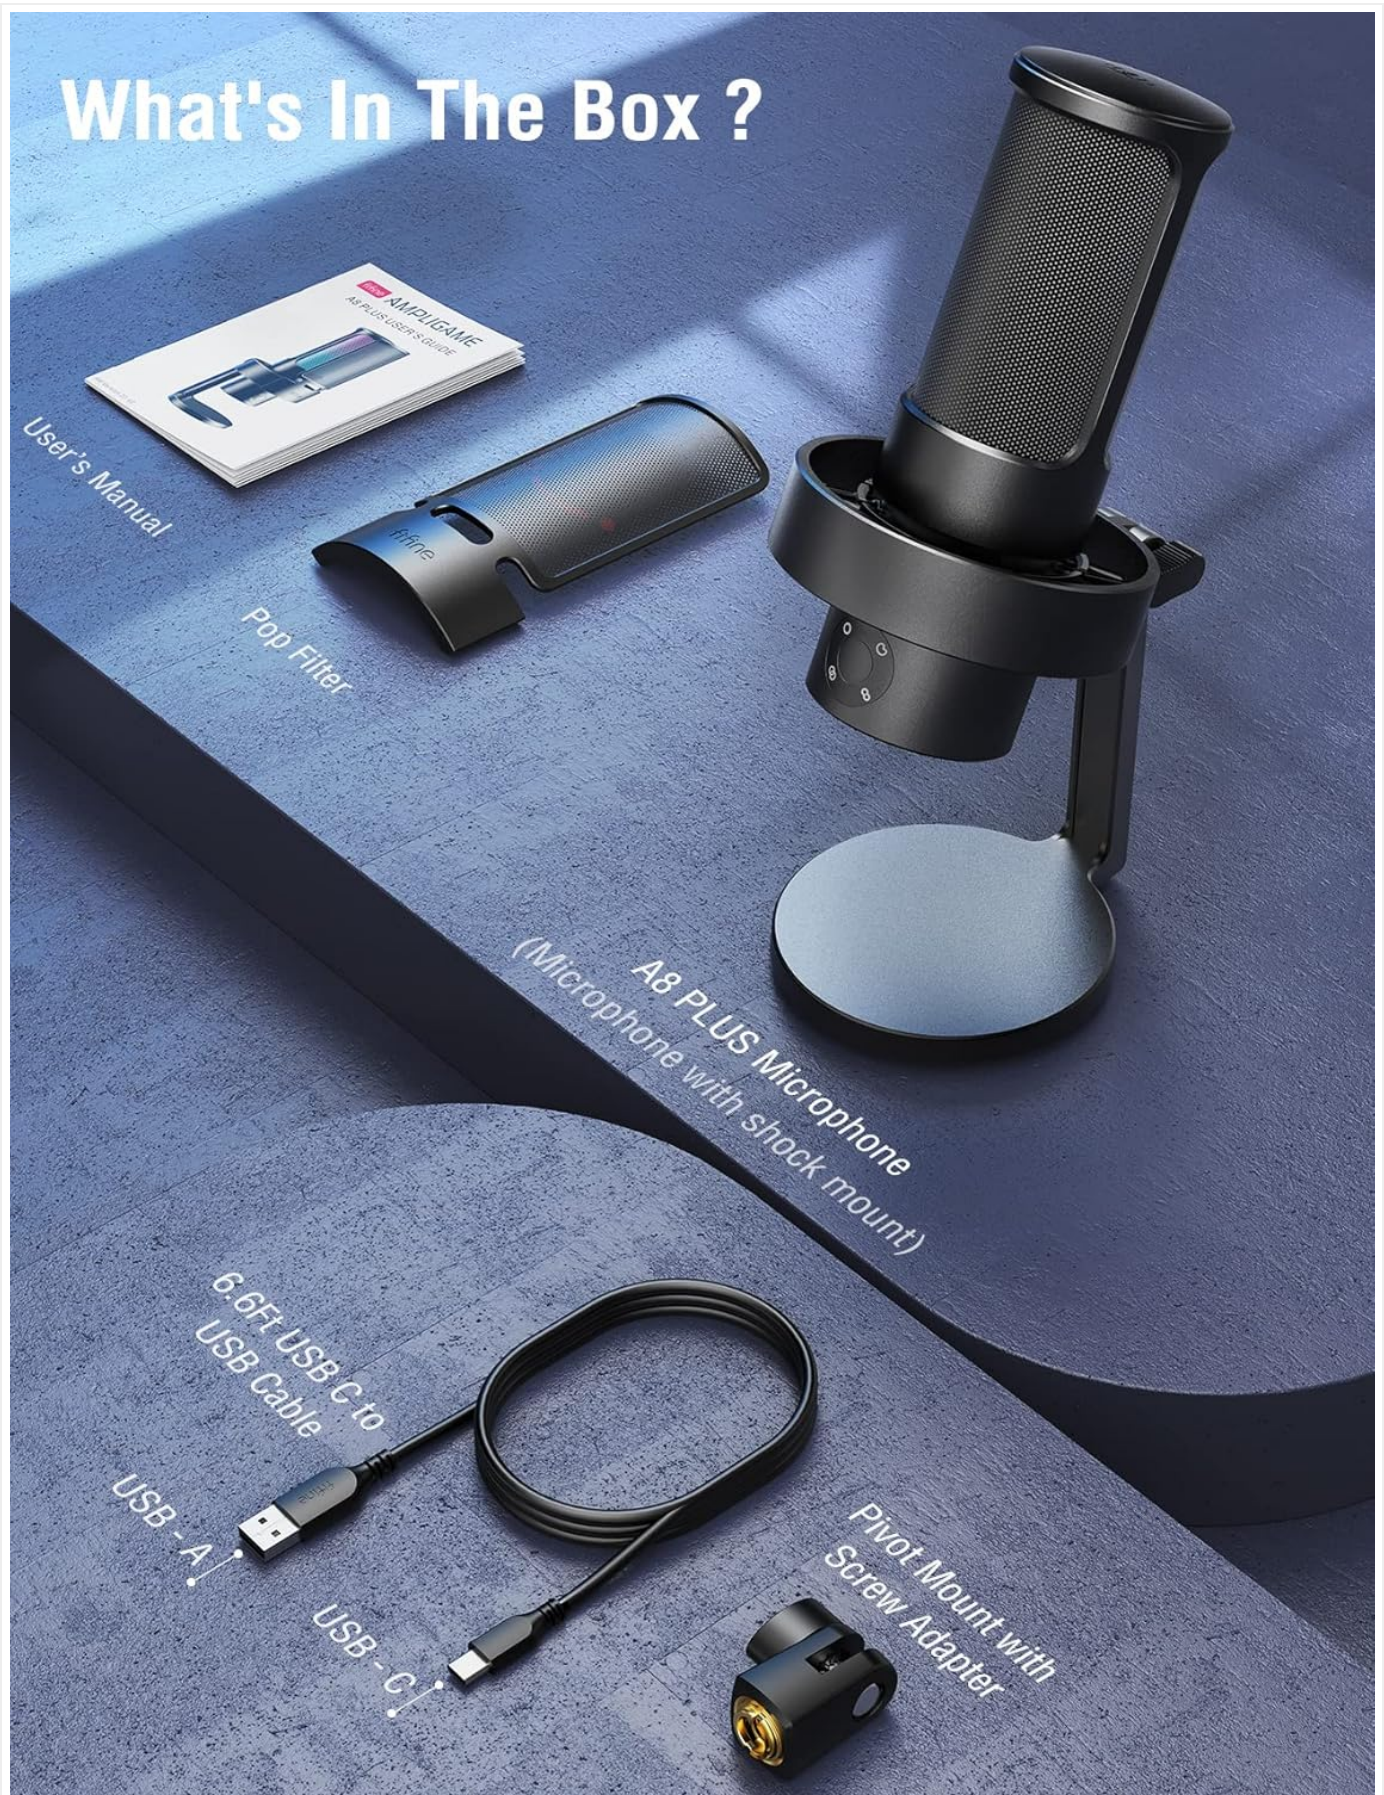


Image 2.1: All components included in the FIFINE AmpliGame A8 PLUS package: microphone, pop filter, USB cable, pivot mount, and user manual.

3. SETUP

3.1 Connecting the Microphone

1. Connect the USB-C end of the provided cable to the USB-C port on the bottom of the FIFINE AmpliGame A8 PLUS microphone.
2. Connect the USB-A end of the cable to an available USB port on your computer (Windows/Mac) or gaming console (PS4/PS5).
3. The microphone is plug-and-play and should be automatically recognized by your operating system. No additional drivers are typically required.



Image 3.1: The microphone connected via USB to a desktop computer, illustrating its plug-and-play compatibility with Desktop, Laptop, and PS4/PS5. Note: Not compatible with Xbox.

3.2 Compatibility

The FIFINE AmpliGame A8 PLUS is compatible with:

- Windows operating systems
- macOS operating systems
- PlayStation 4 (PS4)
- PlayStation 5 (PS5)

Note: This microphone is **not compatible** with Xbox consoles.

4. OPERATING INSTRUCTIONS

4.1 Polar Pattern Selection

The microphone features four selectable polar patterns to optimize audio capture for various scenarios. Press the polar pattern selection button located on the front of the microphone to cycle through the patterns.

Polar Pattern Selection Button



Stereo



Omni-directional



Cardioid



Bi-directional



Image 4.1: The polar pattern selection button and indicators for Stereo, Omni-directional, Cardioid, and Bi-directional patterns.

- **Cardioid:** Captures sound directly in front of the microphone, minimizing background noise. Ideal for solo streaming, gaming, or podcasting.
- **Stereo:** Captures a wide sound image, suitable for recording music, instruments, or ASMR.
- **Omni-directional:** Picks up sound equally from all directions. Best for multi-person conferences or group

discussions.

- **Bi-directional:** Captures sound from the front and rear of the microphone, rejecting side noise. Suitable for two-person interviews or podcasts.

4.2 RGB Lighting Control

The microphone features customizable RGB lighting. Use the RGB control key on the bottom of the microphone to manage the lighting effects.

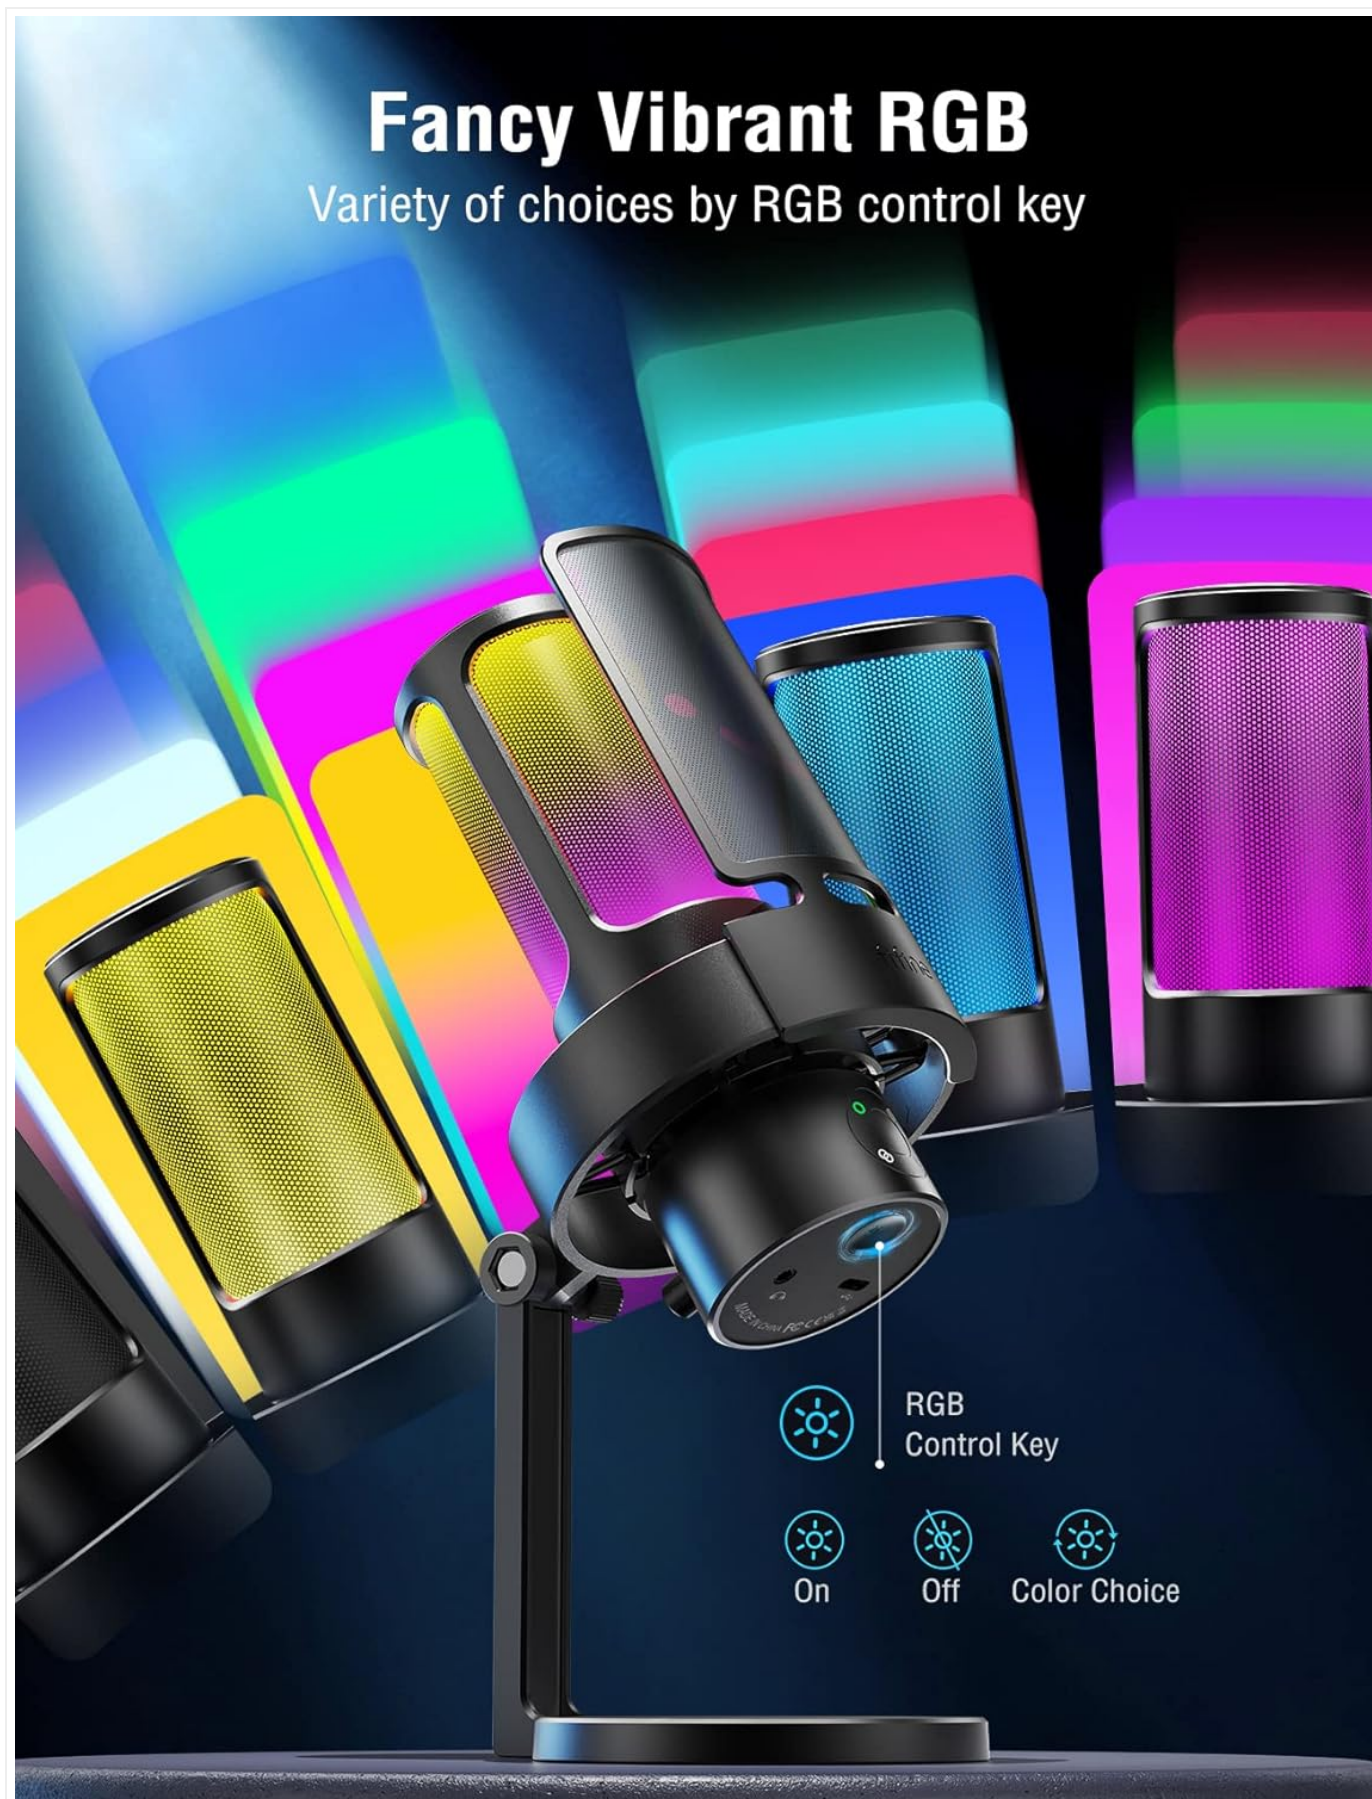


Image 4.2: The RGB control key allows you to turn the lighting on, off, or cycle through various color choices.

- Press the RGB control key to cycle through different color modes and effects.
- Press and hold the RGB control key to turn the lighting off or on.

4.3 Audio Controls

The FIFINE AmpliGame A8 PLUS provides convenient onboard audio controls.

- **Tap-to-Mute Button:** Located on the top of the microphone. Tap to instantly mute or unmute your microphone. An indicator light will show the microphone's status (e.g., green for active, red for mute).



Image 4.3: The top-mounted tap-to-mute button with active (green) and mute (red) indicators.

- **Microphone Gain Knob:** Located on the front of the microphone. Rotate to adjust the microphone's sensitivity (gain). Adjust this to control how loud your voice is picked up.
- **3.5mm Headphone Jack:** Located on the bottom of the microphone. Connect your headphones for real-time audio monitoring of your voice.
- **Headphone Volume Control:** Located on the bottom of the microphone, next to the headphone jack. Rotate to adjust the volume of your headphones for monitoring.



Image 4.4: The headphone volume control knob located on the bottom of the microphone.



Image 4.5: A detailed diagram labeling the Polar Pattern Selection, Monitoring Headphone Jack, Type-C Connector, RGB Control Key, Tap-to-Mute, Mic Gain Knob, and Headphone Volume Control.

5. SPECIFICATIONS

Feature	Detail
Model Number	A8 PLUS
Microphone Form Factor	Tri-Capsule Array
Polar Patterns	Cardioid, Stereo, Omni-directional, Bi-directional
Connectivity Technology	USB (USB-C to USB-A cable included)
Frequency Response	Up to 20 KHz
Signal-to-Noise Ratio	70 dB
Hardware Platform Compatibility	Desktop/Laptop (Windows, macOS), PS4/PS5
Special Features	Controllable RGB, Tap-to-Mute, Mic Gain Knob, Headphone Jack with Volume Control
Material	Acrylonitrile Butadiene Styrene
Item Weight	1.63 pounds

6. TROUBLESHOOTING

- **No Sound/Microphone Not Detected:**
 - Ensure the USB cable is securely connected to both the microphone and your computer/console.
 - Try a different USB port.

- Check your computer's sound settings (Input Device) to ensure the FIFINE A8 PLUS is selected as the default microphone.
- Restart your computer/console.
- **Low Volume/Distorted Sound:**
 - Adjust the microphone gain knob on the front of the microphone.
 - Check the input level settings in your operating system or recording software.
 - Ensure you are speaking directly into the front of the microphone, especially when using Cardioid mode.
 - Verify the selected polar pattern is appropriate for your environment.
- **RGB Lights Not Working:**
 - Press the RGB control key to cycle through modes or turn the lights on.
 - Ensure the microphone is properly powered via the USB connection.
- **Headphone Monitoring Issues:**
 - Ensure headphones are fully plugged into the 3.5mm jack on the microphone.
 - Adjust the headphone volume control knob on the bottom of the microphone.

7. MAINTENANCE


- **Cleaning:** Use a soft, dry cloth to clean the microphone's exterior. Avoid using liquid cleaners or solvents.
- **Storage:** When not in use, store the microphone in a clean, dry place away from extreme temperatures and humidity.
- **Handling:** Handle the microphone with care to prevent damage from drops or impacts.

8. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the official FIFINE website or contact their customer service directly. Keep your purchase receipt for warranty claims.


© 2023 FIFINE. All rights reserved.

Related Documents - A8 PLUS




[FIFINE AmpliGame A6T USB Microphone User Manual and Setup Guide](#)

Comprehensive guide to setting up and using the FIFINE AmpliGame A6T USB microphone, including connection instructions, features, and troubleshooting for PC gaming, streaming, and podcasting.

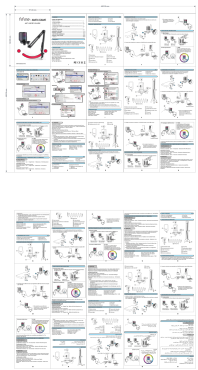


[FIFINE AmpliGame A6T USB Microphone User Manual and Setup Guide](#)

A comprehensive guide for setting up and using the FIFINE AmpliGame A6T USB microphone, featuring plug-and-play functionality, detailed specifications, and operational instructions for gaming, streaming, and podcasting.





[Fifine K658 Microphone User Manual](#)

User manual for the Fifine K658 microphone, detailing its features, setup, and operation. Includes instructions for connecting to computers, using mute and RGB functions, and headphone output.




[Fifine AmpliGame AM8 USB/XLR Dynamic Microphone User Manual](#)

Comprehensive user guide for the Fifine AmpliGame AM8 dynamic microphone, covering setup, features, and troubleshooting for podcasting, streaming, and gaming.

	<p>FIFINE AmpliGame AM8 Microphone User Manual</p> <p>A comprehensive user manual for the FIFINE AmpliGame AM8 microphone, covering setup, features, and troubleshooting.</p>
	<p>FIFINE AmpliGame A6V USB Microphone User Guide Setup & Specifications</p> <p>Comprehensive user guide for the FIFINE AmpliGame A6V USB microphone. Learn how to set up, use, and troubleshoot your A6V microphone for PC and PS5. Includes specifications and features.</p>

Documents - FIFINE – A8 PLUS

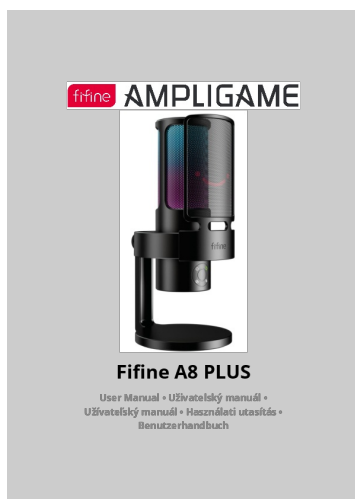

[\[pdf\]](#) User Manual Instructions

Lukáš Chlebovský User Manual 3 hours ago — Should you wish to use your headphones with Mac enjoy audio playback simply choose Headphones as the output device Then make sure adjust 15 Insert provided USB cable firmly into C port located at bottom of microphone Connect A connector on Fifine A8 PLUS dwn alza cz manual 115491 |||

Fifine **A8 PLUS** User Manual Uživatelsk manu Uzvatesk manu Hasznlati utasts Benutzerhandbuch English 3 29 Cestina 30 56 Slovencina 57 83 Magyar 84 110 Deutsch 111 137 2 Dear customer, Thank you for purchasing our product. Please read the following instructions carefully before first us...

lang:en **score:32** filesize: 2.74 M page_count: 137 document date: 2023-08-08



[Fifine A8 Plus Микрофоны: Пайдалану нұсқаулығы](#)

Fifine A8 Plus микрофонына арналған толық пайдалану нұсқаулығы. Орнату, пайдалану, техникалық сипаттамалар, бағыттау режимдері, компьютерге қосу және мәселелерді шешу бойынша нұсқаулықтарды қамтиды.

lang:nl **score:29** filesize: 1.21 M page_count: 8 document date: 2023-07-19




[pdf]

Микрофон A8 Plus Пайдалану бойынша нұсқаулық DNS Үлгісі AM8 Сауда белгісі Fifine түрі динамикалық Қуат параметрлері 5 В Бағыттылық кардиоидты жиілігі диапазоны fifine am8 instrukcia 094735 26072023 drv dns shop ru oth F |||

A8 Plus . , , , , - - - : AM8. : Fifine. . . : 5 . . : 50 16 . . : -503. : 600 . . : 120 . . : 80 . . : 16,6 6,...

lang:nl score:26 filesize: 636.25 K page_count: 8 document date: 2023-07-19

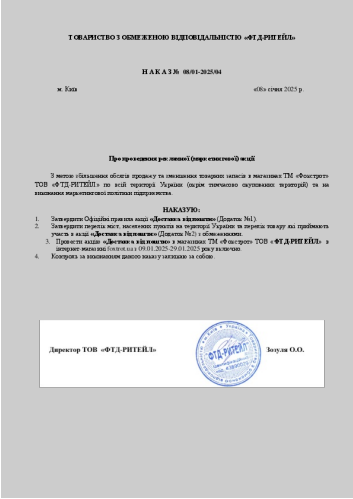

Правила Акції «Доставка від пошти» від ФТД-РИТЕЙЛ

Ознайомтеся з офіційними правилами рекламної акції «Доставка від пошти», що проводиться ТОВ «ФТД-РИТЕЙЛ» (Фокстрот) з 09.01.2025 по 29.01.2025. Дізнайтеся про умови участі, акційні товари та міста проведення.

lang:so score:10 filesize: 1.92 M page_count: 101 document date: 2025-01-24