

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [RALAN](#) /
- › [RALAN P06P Wireless Gaming Controller User Manual](#)

RALAN P06P

RALAN P06P Wireless Gaming Controller User Manual

Model: P06P

1. INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your RALAN P06P Wireless Gaming Controller. Please read this manual thoroughly before using the product to ensure proper functionality and to maximize your gaming experience.





Image 1.1: The RALAN P06P Wireless Gaming Controller shown with compatible platforms including PlayStation 4, Nintendo Switch, and PC monitors.

2. PACKAGE CONTENTS

Verify that all items listed below are included in your package:

- 1 x RALAN P06P Wireless Gaming Controller
- 6 x Thumb Grip Caps (three sets of different heights)
- 1 x Type-C Charging Cable
- 1 x User Manual

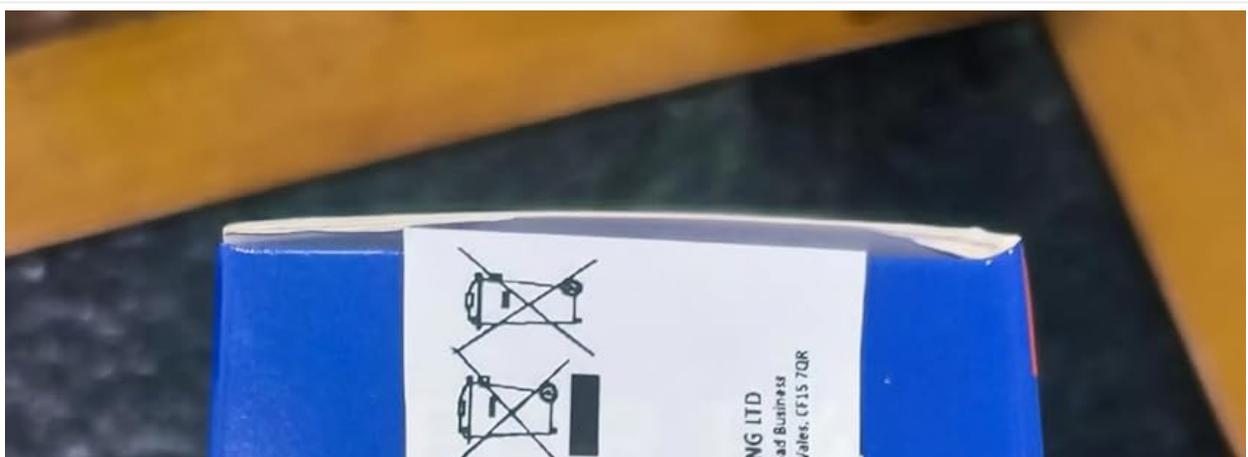




Image 2.1: The RALAN P06P Wireless Gaming Controller displayed with its accessories: six thumb grip caps and a Type-C charging cable.

3. CONTROLLER LAYOUT

Familiarize yourself with the buttons and features of your RALAN P06P controller:

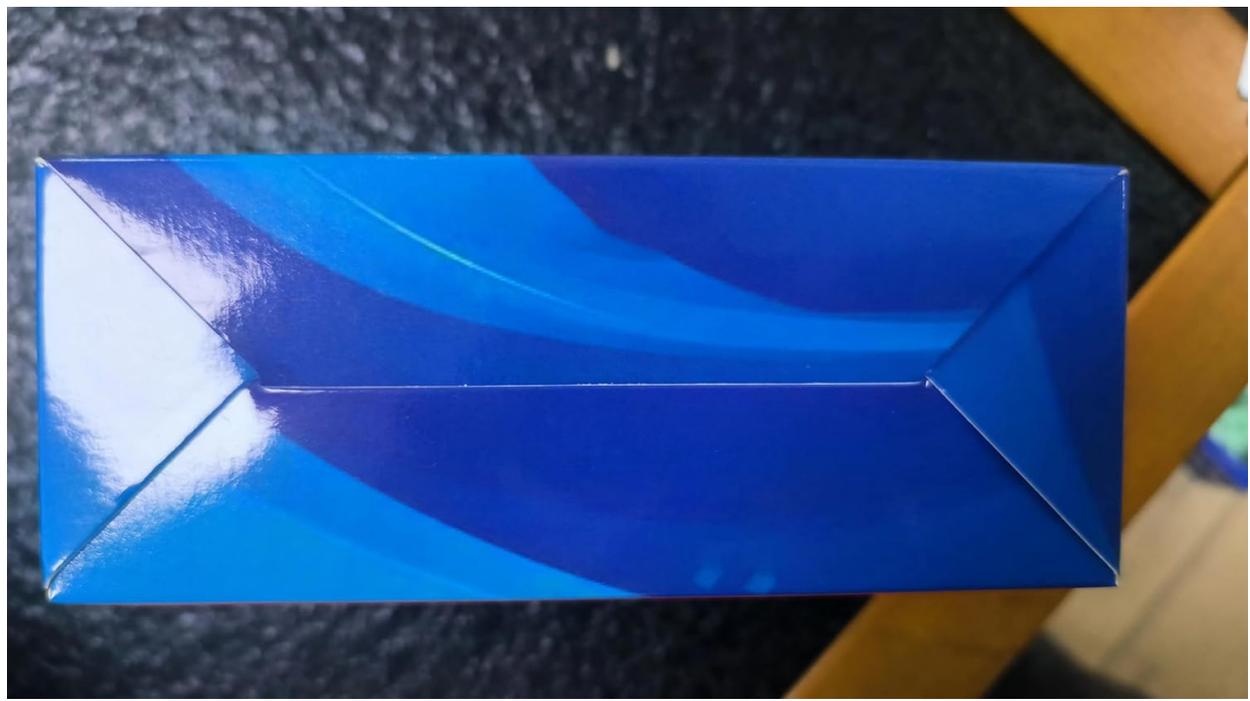


Image 3.1: A detailed diagram illustrating the various buttons and components of the RALAN P06P controller, including the Share button, Touchpad, Options button, Left Rocker/Rocker button, Left Joystick, Home button, Right Joystick, Action Buttons, R1/R2, and L1/L2 triggers.

- **Share Button:** Used for sharing gameplay content.
- **Options Button:** Accesses in-game menus and options.
- **Touchpad:** Multi-touch input surface.
- **Directional Pad (D-Pad):** For directional input.
- **Action Buttons (Triangle, Circle, Cross, Square):** Primary input buttons.
- **Left/Right Joysticks:** Analog input for movement and camera control.
- **L1/R1 Buttons:** Shoulder buttons.
- **L2/R2 Triggers:** Analog triggers.
- **Home Button:** Returns to the system home screen.
- **M1/M2 Buttons:** Programmable back buttons.
- **Reset Button:** Small pinhole button for resetting the controller (located on the back).
- **Type-C Port:** For charging and wired connection.
- **3.5mm Audio Jack:** For connecting headsets.

4. SETUP AND CONNECTION

4.1. Charging the Controller

Before first use, fully charge the controller. Connect the supplied Type-C cable to the controller's Type-C port and the other end to a USB power source (e.g., console, PC, USB wall adapter). The indicator light will show charging status and turn off when fully charged.

4.2. Connecting to PlayStation 4 (PS4/PS4 Pro/PS4 Slim)

Wired Connection:

1. Connect the controller to your PS4 console using the Type-C cable.
2. Press the Home button on the controller. The controller will pair automatically.

Wireless Connection:

1. Ensure the controller is charged and powered off.
2. On your PS4, go to Settings > Devices > Bluetooth Devices.
3. Press and hold the Share button and the Home button simultaneously on the controller until the light bar flashes rapidly.
4. Select the controller from the list of available Bluetooth devices on your PS4.
5. Once connected, the light bar will glow steadily.

4.3. Connecting to PlayStation 3 (PS3) / PC (Windows)

Wired Connection:

1. Connect the controller to your PS3 console or PC using the Type-C cable.
2. The controller will be recognized as a wired gamepad. For PC, drivers may install automatically.

Wireless Connection (PC):

1. Ensure your PC has Bluetooth enabled.
2. Go to Bluetooth & other devices settings on your PC.
3. Press and hold the Share button and the Home button simultaneously on the controller until the light bar flashes rapidly.
4. Select 'Add Bluetooth or other device' and choose 'Bluetooth'.
5. Select the controller from the list to pair.

4.4. Connecting to Nintendo Switch

Wireless Connection:

1. On the Nintendo Switch HOME Menu, select 'Controllers' > 'Change Grip/Order'.
2. Press and hold the Share button and the Home button simultaneously on the controller until the light bar flashes rapidly.
3. The controller will appear on the Switch screen and connect.

4.5. Connecting to iOS / Android Devices

Wireless Connection:

1. Enable Bluetooth on your iOS or Android device.
2. Press and hold the Share button and the Home button simultaneously on the controller until the light bar flashes rapidly.
3. Select the controller from the list of available Bluetooth devices on your mobile device to pair.

5. OPERATING INSTRUCTIONS

5.1. Basic Functions

- **Power On/Off:** Press the Home button to power on. To power off, hold the Home button for approximately 10 seconds until the controller shuts down.
- **Share Button:** Functions according to the platform and game, typically for screenshots or video clips.
- **Options Button:** Accesses in-game menus or system options.
- **Touchpad:** Supports multi-touch input for compatible games and system navigation.

5.2. Vibration Function

The controller features dual vibration motors that provide tactile feedback during gameplay, enhancing immersion. Vibration intensity may be adjustable within game settings or system settings on some platforms.

5.3. Six-Axis Gyroscope

The integrated six-axis somatosensory control allows for precise motion sensing in compatible games. This feature is particularly useful for aiming, steering, or other motion-controlled actions.



Image 5.1: The RALAN P06P controller illustrating its six-axis somatosensory control capability, useful for precise movements in games like racing simulations.

5.4. Turbo Function (Auto Consecutive)

The Turbo function allows a button to be pressed repeatedly as long as it is held down. This can be useful for certain in-game actions.

1. **To Activate:** Press the button you wish to set to Turbo, then press the 'T' (Turbo) button. The button will now auto-repeat when held.
2. **To Deactivate:** Press the same button again, then press the 'T' button.



Image 5.2: The RALAN P06P controller highlighting the 'T' (Turbo) button and the 3.5mm audio jack for headset connection.

5.5. Macro Programming (M1/M2 Back Buttons)

The M1 and M2 back buttons can be programmed to perform a sequence of up to 12 actions, allowing for customized commands.

1. **To Enter Programming Mode:** Press and hold the 'SET' button (usually a small button near M1/M2, or a combination of buttons as per specific model instructions) until the indicator light changes.
2. **To Record Macro:** Press the M1 or M2 button you wish to program. Then, input the sequence of up to 12 button presses.
3. **To Save Macro:** Press the 'SET' button again. The indicator light will return to normal, and the macro is saved.
4. **To Clear Macro:** Enter programming mode, then press the M1 or M2 button you wish to clear, and then press 'SET' again without inputting any sequence.

Backkey supports macro programming

Customize your divine actions

Double keys on the back, M1 and M2 can be customized to map other key values
Easy output of magic operations such as one key rolling and one key continuous moves



Image 5.3: The rear view of the RALAN P06P controller, highlighting the M1 and M2 programmable back buttons and the reset pinhole.

5.6. Audio Jack

Connect a standard 3.5mm headset to the audio jack on the controller for in-game audio and voice chat (platform compatibility may vary).

6. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the controller. Do not use harsh chemicals or abrasive materials.
- **Storage:** Store the controller in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To prolong battery life, avoid fully discharging the controller frequently. Charge it regularly, even if not in use for extended periods.

7. TROUBLESHOOTING

- **Controller not connecting:** Ensure the controller is charged. Try re-pairing the controller following the instructions in Section 4. If issues persist, try resetting the controller.

- **Input lag or disconnection:** Ensure there are no obstructions between the controller and the console/device. Move closer to the device. Check for interference from other wireless devices.
- **Buttons not responding or 'stick drift':** Try resetting the controller using the pinhole reset button on the back (see Image 5.3). Insert a small, pointed object (like a paperclip) into the pinhole and press gently for 3-5 seconds.
- **Battery drains quickly:** Ensure the controller is fully charged. Reduce vibration intensity in game settings if possible.
- **Audio jack not working:** Ensure your headset is properly plugged in. Check system audio settings on your console/PC.

8. SPECIFICATIONS

Feature	Detail
Model	P06P
Connectivity	Bluetooth 4.2, Wired (Type-C)
Compatibility	PS4, PS4 Pro, PS4 Slim, PS3, PC, iOS, Nintendo Switch
Special Features	Six-axis gyroscope, Dual vibration motors, Turbo function, Macro programmable back buttons (M1/M2), Multi-touch touchpad, 3.5mm audio jack
Included Accessories	Type-C cable, Thumb grip caps (x6)

9. WARRANTY AND SUPPORT

The RALAN P06P Wireless Gaming Controller comes with a 30-day return or replacement policy. For any product inquiries, technical support, or warranty claims, please refer to your purchase platform or contact RALAN customer service directly.

For further assistance, please visit the [RALAN Store on Amazon](#).


Related Documents - P06P

	<p>Manual del Control de Juego Inalámbrico Ralan: Configuración, Funciones y Operación</p> <p>Manual de usuario completo para el control de juego inalámbrico Ralan, detallando la configuración para Android, iOS y PC (USB/Bluetooth), funciones de botones, modo turbo, funciones multimedia, carga y especificaciones eléctricas.</p>
---	---



[Ralan S03 Wireless Game Handle: User Manual and Features](#)

Comprehensive guide to the Ralan S03 wireless game controller, covering setup, features, compatibility with Xbox, Switch, PS4, PC, and mobile devices, plus customization options.



[Manual del Control de Juego Inalámbrico Ralan: Configuración, Funciones y Operación](#)

Manual de usuario completo para el control de juego inalámbrico Ralan, detallando la configuración para Android, iOS y PC (USB/Bluetooth), funciones de botones, modo turbo, funciones multimedia, carga y especificaciones eléctricas.



[Ralan S03 Wireless Game Handle: User Manual and Features](#)

Comprehensive guide to the Ralan S03 wireless game controller, covering setup, features, compatibility with Xbox, Switch, PS4, PC, and mobile devices, plus customization options.