

[Manuals.plus](#) /

› [ZEEMR](#) /

› ZEEMR Z1 MINI Projector User Manual

## ZEEMR Z1 MINI

# ZEEMR Z1 MINI Projector User Manual

Model: Z1 MINI

## 1. SAFETY INFORMATION

Please read all safety instructions carefully before using the ZEEMR Z1 MINI Projector. Keep this manual for future reference.

- **Do Not Stare into Lens:** The projector emits a bright light. Avoid looking directly into the lens when the projector is on, as this may cause eye strain or damage.
- **Ventilation:** Ensure adequate ventilation around the projector. Do not block any ventilation openings. Maintain a minimum distance of 10 cm (4 inches) from walls or other objects.
- **Power Source:** Use only the power adapter supplied with the projector. Ensure the voltage is compatible with your region's power supply.
- **Liquid and Moisture:** Do not expose the projector to rain, moisture, or any liquids. Do not place objects filled with liquids, such as vases, on or near the projector.
- **Cleaning:** Unplug the projector from the power outlet before cleaning. Use a soft, dry cloth. Do not use liquid or aerosol cleaners.
- **Repairs:** Do not attempt to repair this product yourself. Refer all servicing to qualified service personnel.

## 2. PACKAGE CONTENTS

Verify that all items are present in the package:

- 1 x ZEEMR Z1 MINI Projector (Host)
- 1 x Remote Control
- 1 x User Manual
- 1 x Power Cord
- 1 x Power Adapter
- 1 x HDMI Cable
- 1 x Certificate

## 3. PRODUCT OVERVIEW

Familiarize yourself with the components and interfaces of your ZEEMR Z1 MINI Projector.



The ZEEMR Z1 MINI Projector, a compact green projector with a fabric-covered front, featuring the lens and a sensor, resting on white and green pedestals in a serene, water-filled landscape.

## MULTI-INTERFACES



PC, Console,  
TV Sticks



USB, Removable  
Hard Disk




Network  
Interface

Comes with LAN network interface,  
Compared with WiFi models,  
the network speed is faster and more stable



Rear view of the ZEEMR Z1 MINI Projector, showcasing its various ports including HDMI, USB, LAN, and power input, designed for versatile connectivity.

ZI-MINI

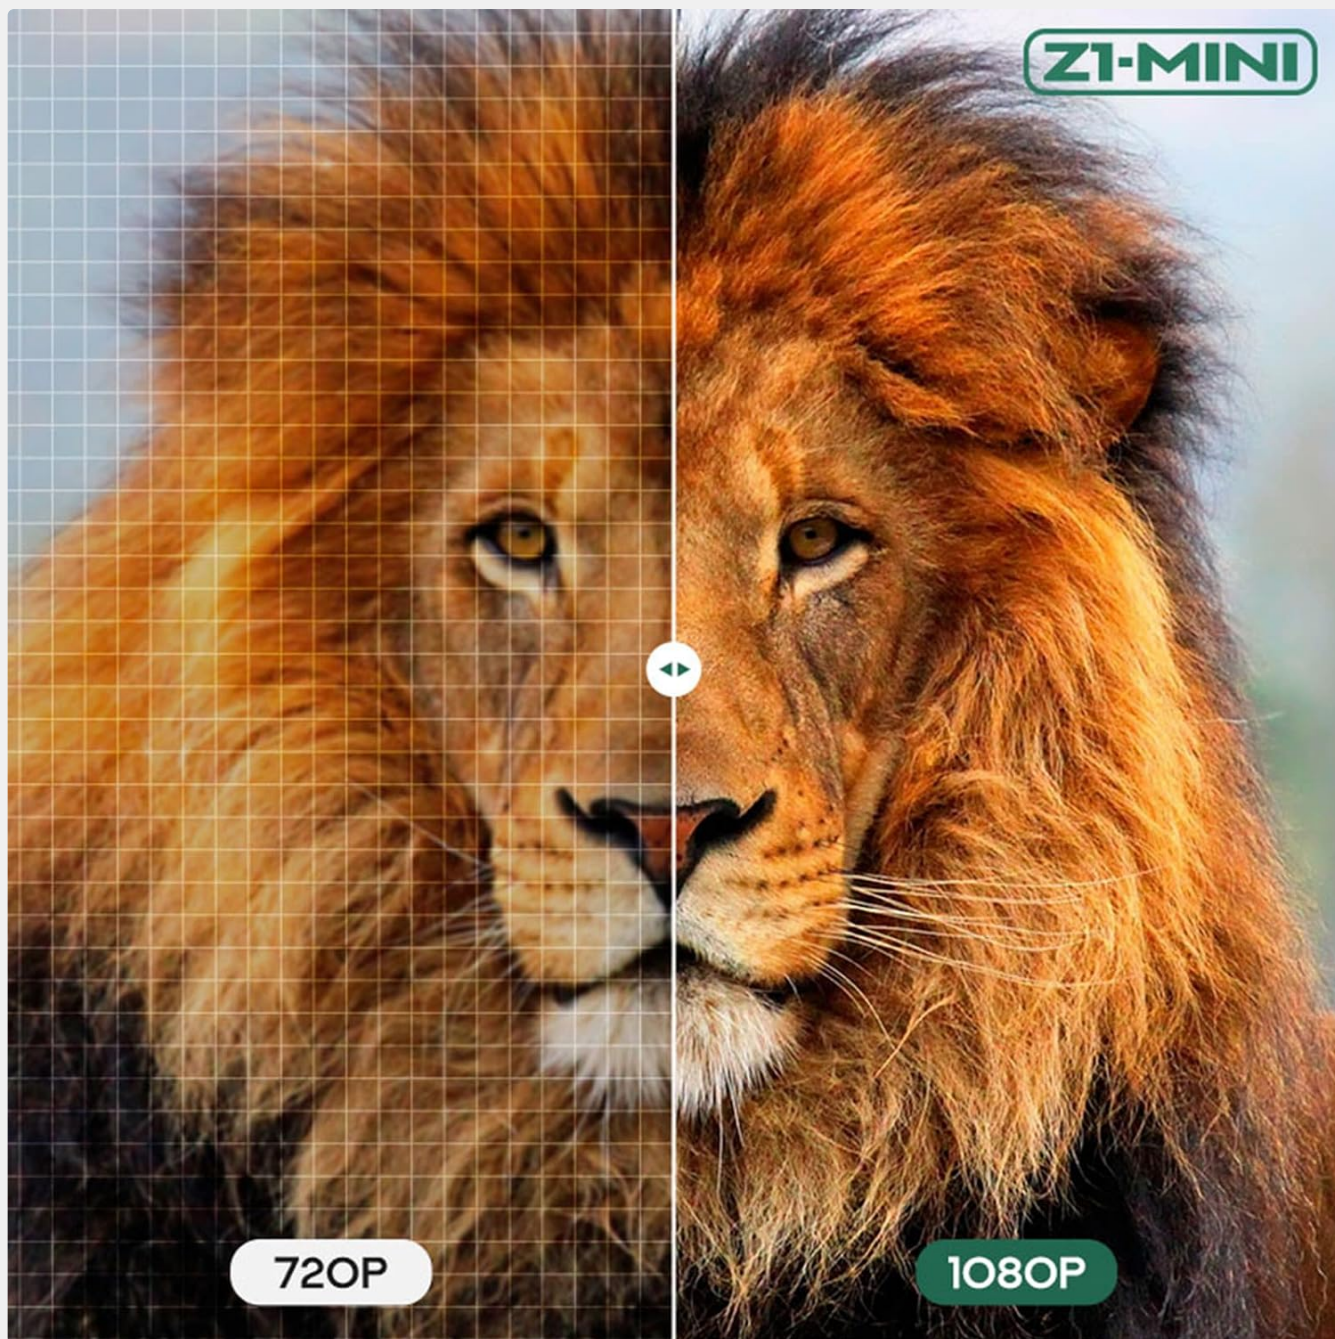


A split image demonstrating the superior clarity of 1080P resolution on the right, displaying a lion's face with fine detail, compared to the pixelated 720P on the left.

# Dream UI

Self-Developed By ZEEMR

Lighter interface, faster speed, smarter memory optimization technology.  
Real-time smooth without jamming.

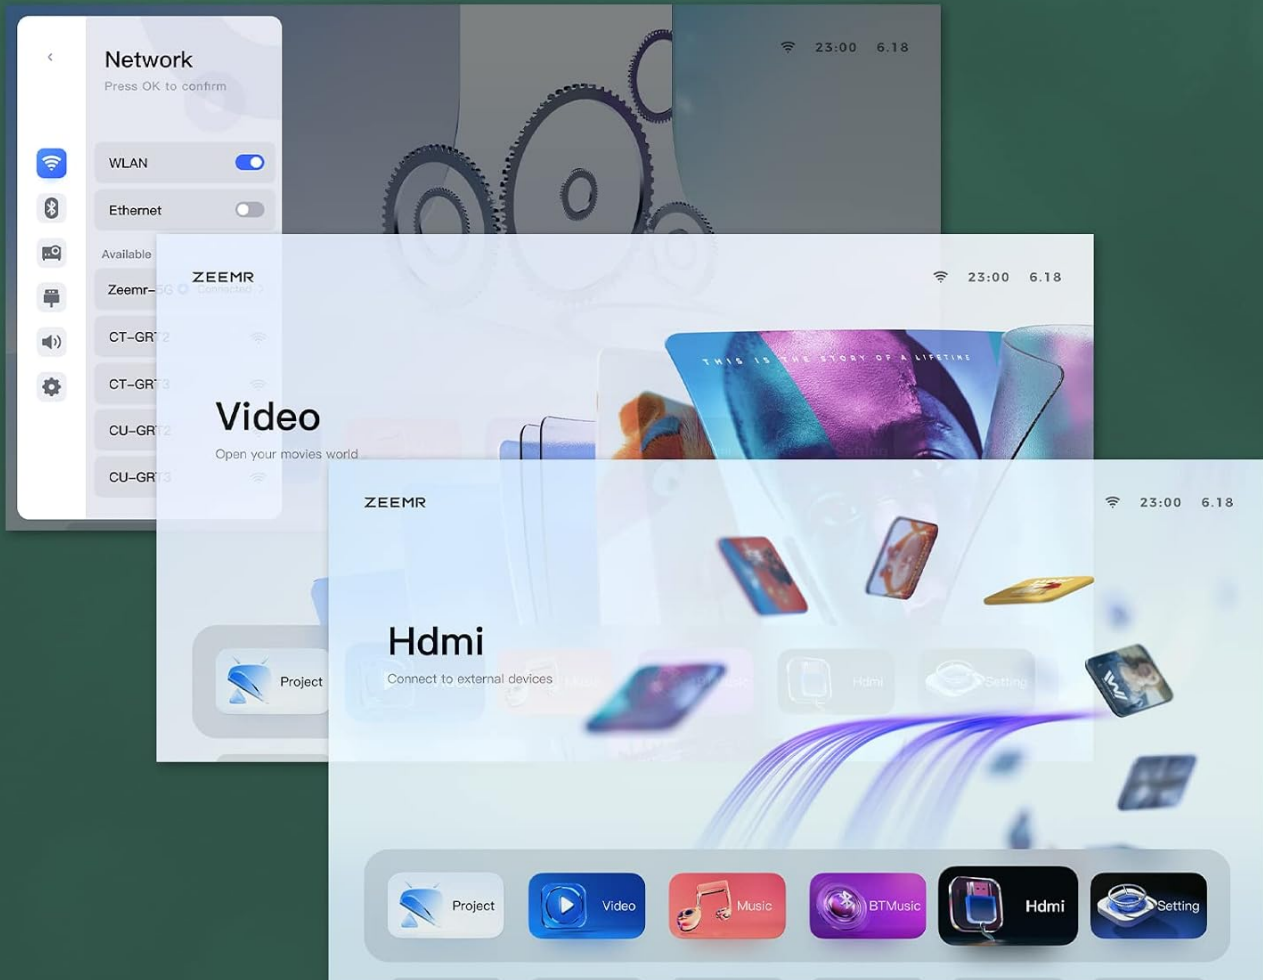

Screenshots of the ZEEMR projector's 'Dream UI' interface, showing options for Network, Video, HDMI, Music, and Settings, indicating a user-friendly and optimized operating system.

## 4. SETUP

### 4.1 Initial Power On

1. Connect the power adapter to the projector's DC input port and then plug it into a power outlet.
2. Press the power button on the projector or the remote control to turn on the device.
3. The projector will automatically perform autofocus and auto keystone correction to optimize the image clarity and shape. Allow a few seconds for this process to complete.

### 4.2 Network Connection

The ZEEMR Z1 MINI supports both 2.4G and 5G Wi-Fi for stable and fast transmission.

- Navigate to the 'Network' settings in the Dream UI.

- Select your desired Wi-Fi network from the list.
- Enter the Wi-Fi password using the on-screen keyboard and confirm.
- For a wired connection, connect an Ethernet cable to the LAN port on the projector.

### 4.3 Bluetooth Pairing

Connect external Bluetooth audio devices or use the projector as a Bluetooth speaker.

- Go to the 'Settings' menu and select 'Bluetooth'.
- Turn on Bluetooth and search for available devices.
- Select your desired Bluetooth device from the list to pair.

## 5. OPERATING INSTRUCTIONS

---

### 5.1 Connecting External Devices

The projector supports various input sources:

- **HDMI:** Connect your PC, game console, or TV stick to the HDMI port. Select 'HDMI' input from the main menu.
- **USB:** Insert a USB drive into the USB port to play media files. Select 'USB Data' from the main menu.

### 5.2 Using the Dream UI

The self-developed Dream UI provides a lighter interface and faster speed.

- Use the remote control's navigation buttons to move between options.
- Select 'Video' to browse and play video files.
- Select 'Music' to play audio files or use the projector as a Bluetooth audio device.
- Access 'Settings' for system configurations, network, display, and audio adjustments.

### 5.3 Projection Modes

The projector supports various projection orientations:

- **Front Projection:** Standard setup, projector placed in front of the screen/wall.
- **Ceiling Projection:** Projector mounted upside down on the ceiling. Adjust image orientation in settings.
- **Rear Projection:** Projector placed behind a translucent screen. Adjust image orientation in settings.

This video demonstrates the unboxing, setup, and projection capabilities of the ZEEMR Z1 MINI Smart Projector, highlighting its compact design, connectivity options, and clear image output.

## 6. MAINTENANCE

---

Proper maintenance ensures the longevity and optimal performance of your projector.

- **Dust-Proof Design:** The ZEEMR Z1 MINI features a fully sealed optical machine, which significantly reduces dust accumulation and extends the product lifespan to over 30,000 hours.
- **Lens Cleaning:** Gently wipe the projector lens with a soft, lint-free cloth specifically designed for optical surfaces. Do not use abrasive materials or harsh chemicals.
- **Cooling System:** The dual circulation cooling system is designed for effective heat dissipation. Ensure the ventilation vents are clear of obstructions to maintain efficient cooling and reduce internal optical path loss.

- **Storage:** When not in use for extended periods, store the projector in a cool, dry place, away from direct sunlight and extreme temperatures.

## 7. TROUBLESHOOTING

If you encounter issues with your ZEEMR Z1 MINI Projector, refer to the following common solutions:

| Issue                                         | Possible Cause / Solution                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| No image projected / Image blurry             | <ul style="list-style-type: none"> <li>• Ensure the projector is powered on and the lens cap is removed.</li> <li>• Check if the projector is in standby mode.</li> <li>• Allow the auto-focus and auto-keystone correction to complete. If still blurry, manually adjust focus if available.</li> <li>• Verify the input source is correctly selected (e.g., HDMI, USB).</li> </ul>             |
| No sound / Low volume                         | <ul style="list-style-type: none"> <li>• Adjust the volume on the projector and the connected source device.</li> <li>• Check audio output settings on the source device (e.g., TV stick) to ensure audio is routed to HDMI or Bluetooth.</li> <li>• Verify Bluetooth connection if using external speakers.</li> <li>• Ensure the audio cable (if applicable) is securely connected.</li> </ul> |
| Cannot connect to Wi-Fi / Unstable connection | <ul style="list-style-type: none"> <li>• Ensure the Wi-Fi password is correct.</li> <li>• Move the projector closer to the Wi-Fi router.</li> <li>• Restart the projector and the Wi-Fi router.</li> <li>• Try connecting to a different Wi-Fi band (2.4G or 5G).</li> </ul>                                                                                                                     |
| Remote control not responding                 | <ul style="list-style-type: none"> <li>• Ensure there are no obstructions between the remote and the projector's IR receiver.</li> <li>• Replace the batteries in the remote control.</li> <li>• Ensure the remote is pointed directly at the projector.</li> </ul>                                                                                                                              |
| Image appears washed out or dim               | <ul style="list-style-type: none"> <li>• The projector performs best in dark environments. Reduce ambient light for optimal viewing.</li> <li>• Ensure the projection surface is white and smooth.</li> </ul>                                                                                                                                                                                    |
| AirPlay/Screen Mirroring issues               | <ul style="list-style-type: none"> <li>• Ensure both the projector and your device are connected to the same Wi-Fi network.</li> <li>• Check for any required companion apps (e.g., EShare) and ensure they are correctly installed and configured on your device.</li> <li>• Verify device compatibility with the projector's mirroring features.</li> <li>• Restart both devices.</li> </ul>   |

## 8. SPECIFICATIONS

| Feature                 | Description                                                                                                                                                               |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Brand                   | ZEEMR                                                                                                                                                                     |
| Model                   | Z1 MINI                                                                                                                                                                   |
| Display Resolution      | Native 1920x1080P, Supports 4K decoding                                                                                                                                   |
| Connectivity Technology | Bluetooth, HDMI, USB, Wi-Fi (2.4G+5G)                                                                                                                                     |
| Special Features        | AI Autofocus, AI Auto Keystone Correction, DCI-P3 Color Gamut Standard, Dual Hi-Fi Stereo Speakers (5W*2pcs Bass Speaker), Fully Sealed Dust-Proof Design, 1G+16G storage |
| Lamp Life               | 30,000+ Hours                                                                                                                                                             |
| Cooling System          | Dual circulation cooling system                                                                                                                                           |
| Item Weight             | 2.39 ounces                                                                                                                                                               |
| Package Dimensions      | 10.59 x 10.55 x 8.74 inches                                                                                                                                               |
| Color                   | Green                                                                                                                                                                     |
| Recommended Uses        | Home Theater, Outdoor Party, Meeting, Movie Cinema, Gaming, Business                                                                                                      |

## 9. WARRANTY AND SUPPORT

ZEEMR products are designed and manufactured to the highest quality standards. For warranty information and technical support, please refer to the warranty card included in your package or visit the official ZEEMR website. If you require assistance with setup, operation, or troubleshooting beyond the scope of this manual, please contact ZEEMR customer service.

© 2023 ZEEMR. All rights reserved.

### ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

### Question

Example: How do I reset this device or fix this error?

### Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

---

Open the live page

<https://manuals.plus/asin/B0BZ4CG84Q>

More documents and user manuals: <https://manuals.plus/>