



Manuals.plus /

› LEDIARY /

› LEDIARY 22-Inch Farmhouse Caged Flush Mount Ceiling Fan with Lights and Remote Control Instruction Manual

## LEDIARY B0BZPX9ZN4

# LEDIARY 22-Inch Farmhouse Caged Flush Mount Ceiling Fan with Lights and Remote Control Instruction Manual

Model: B0BZPX9ZN4

## 1. INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your LEDIARY 22-inch Farmhouse Caged Flush Mount Ceiling Fan with Lights and Remote Control. Please read this manual thoroughly before installation and retain it for future reference.

The LEDIARY ceiling fan combines a unique farmhouse aesthetic with modern functionality, featuring a quiet DC motor, multiple speed settings, and reversible airflow for year-round comfort.

## 2. SAFETY INFORMATION

**WARNING: To reduce the risk of fire, electric shock, or personal injury, always follow these instructions:**

- Ensure the power is turned off at the circuit breaker before installation or servicing.
- All electrical wiring must be performed by a qualified electrician and comply with local codes and regulations.
- The fan must be mounted to a ceiling joist or support structure capable of supporting a minimum of 35 lbs (15.9 kg).
- Do not bend the blade holders during installation, balancing, or cleaning.
- Keep hands, tools, and other objects clear of the fan blades when the fan is operating.
- Do not operate the fan if there is any visible damage to the blades or motor housing.
- This appliance is intended for indoor use only.

## 3. PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation.

- Ceiling Fan Assembly (with integrated motor and light sockets)
- Metal Caged Frame
- Remote Control
- Wall Plate for Remote Control
- Mounting Hardware (screws, wire nuts)
- Instruction Manual


*Note: 4 x E26 bulbs are required and not included. Recommended bulbs: A19, ST19, T14 (Incandescent Max 60W, LED Max 10W).*

## 4. SPECIFICATIONS

<b>Brand</b>	LEDIARY
<b>Model</b>	22 Inch Farmhouse Caged Flush Mount Ceiling Fan
<b>Size</b>	22 Inch
<b>Product Dimensions</b>	20 x 20 x 8 inches (approximate)
<b>Item Weight</b>	8.85 Pounds
<b>Material</b>	Metal, ABS Blades
<b>Color</b>	Black (with distressed wood-look frame)
<b>Power Source</b>	DC Motor
<b>Wattage</b>	60 watts (Max for incandescent bulbs)
<b>Number of Light Sources</b>	4 (E26 base)
<b>Control Method</b>	Remote Control
<b>Special Features</b>	Remote Controlled, Timer, Reversible Motor, 6 Speed Settings, Low Noise
<b>Indoor/Outdoor Usage</b>	Indoor



# 22" Ceiling Fan

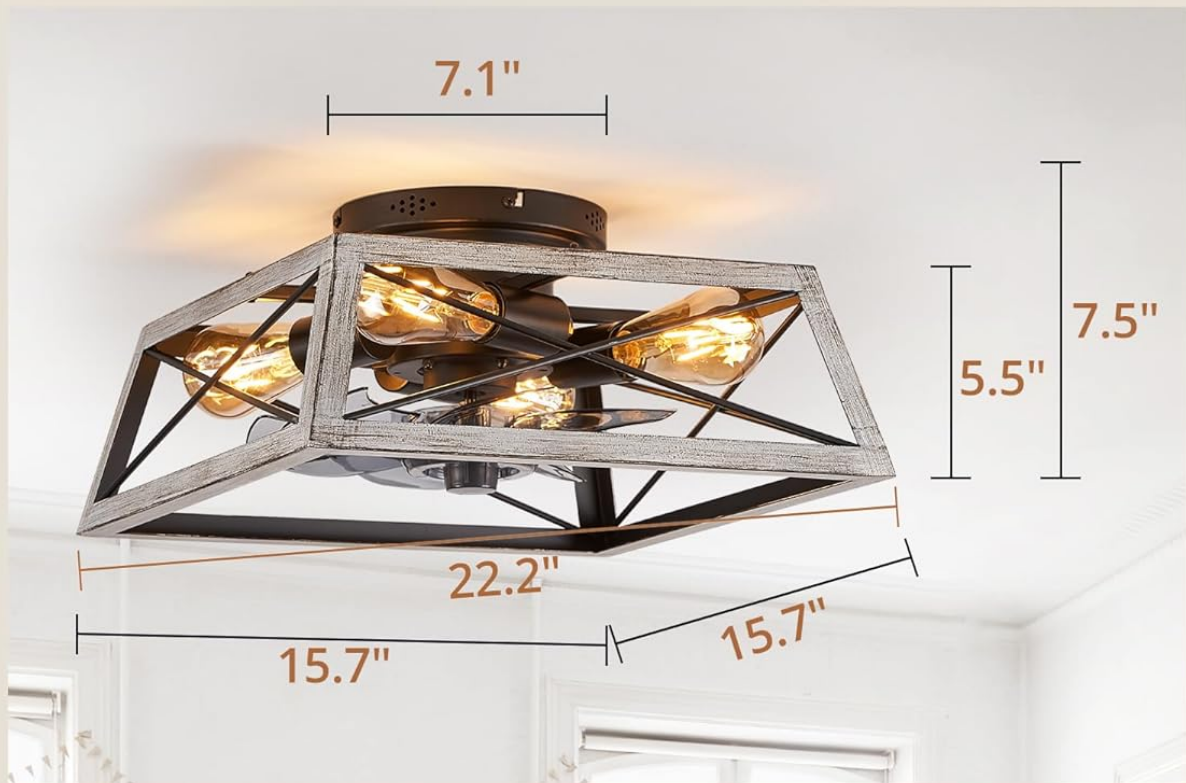

## Recommended E26 Base Bulb

E26x4 Not Included



A19



T14



ST19



Image: Product dimensions and recommended E26 bulb types (A19, T14, ST19). The fan measures approximately 22.2 inches wide, 15.7 inches deep, and 7.5 inches high from the ceiling.

## 5. INSTALLATION INSTRUCTIONS

Most functional components of this ceiling fan are pre-assembled to simplify installation. It is recommended to have two people for installation.

1. **Power Disconnection:** Before beginning, ensure the power supply to the installation area is turned off at the main circuit breaker.
2. **Mounting Bracket Installation:** Securely attach the mounting bracket to a ceiling joist or a suitable

- support structure. Ensure the structure can safely support the fan's weight (approximately 8.85 lbs).
3. **Wiring:** Connect the fan's electrical wires to the household wiring according to local electrical codes. Typically, this involves connecting live, neutral, and ground wires. Use appropriate wire nuts.
  4. **Attach Fan Body:** Carefully lift the fan body and attach it to the mounting bracket. Many models include a carabiner or hook to temporarily hold the fan during wiring.
  5. **Install Light Bulbs:** Screw in four E26 base bulbs (not included) into the light sockets.
  6. **Secure Caged Frame:** Attach the metal caged frame to the fan body, ensuring it is securely fastened.
  7. **Remote Control Setup:** Install the battery (included) into the remote control. The remote can be mounted to a wall using the provided wall plate for convenience.
  8. **Power Restoration:** Once installation is complete and all connections are secure, restore power at the circuit breaker.



Image: Simplified installation steps. The fan is designed for easy installation, with most components pre-assembled, allowing completion within approximately 30 minutes.

## 6. OPERATING INSTRUCTIONS

Your LEDIARY ceiling fan is operated using the included remote control. Ensure the remote has a working battery.

### 6.1 Remote Control Functions

# Remote Control



Image: Layout of the remote control with labeled buttons for various functions.

- **Light ON/OFF:** Press to turn the lights on or off.
- **Fan OFF:** Press to turn the fan off.
- **Light & Fan All OFF:** Press to turn both the light and fan off simultaneously.
- **6 Speed Setting:** Buttons labeled 1-6 control the fan speed, from lowest (1) to highest (6).
- **Natural Wind:** Activates a mode that simulates natural breezes by varying fan speed.
- **Reversible Motor Button (R/F):**
  - **F (Forward):** For summer use, creates a downward airflow for cooling.
  - **R (Reverse):** For winter use, creates an upward airflow to circulate warm air.

- **Timer Setting (1H, 2H, 4H, 8H):** Sets the fan to automatically turn off after 1, 2, 4, or 8 hours.
- **Remote Controller Mute:** Mutes the remote's audible feedback.

## 6.2 Reversible Wind Direction

The fan features a reversible motor to optimize comfort year-round:

- **Summer Mode (Forward):** Blades rotate counter-clockwise, pushing air downwards to create a cooling effect.
- **Winter Mode (Reverse):** Blades rotate clockwise, drawing air upwards to circulate warm air trapped near the ceiling.



Image: Visual representation of summer forward (cooling airflow) and winter reversal (better air circulation) modes.

## 7. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** Always turn off the power at the circuit breaker before cleaning. Use a soft, damp cloth to wipe down the fan blades and motor housing. Avoid using abrasive cleaners or solvents that could damage the finish.
- **Bulb Replacement:** Ensure power is off before replacing light bulbs. Allow bulbs to cool completely before handling.
- **Tighten Fasteners:** Periodically check all screws and fasteners on the fan and mounting hardware to ensure they are secure.

## 8. TROUBLESHOOTING

If you experience issues with your LEDIARY ceiling fan, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Fan does not start or lights do not turn on.	No power supply; loose wiring; remote control battery dead or not paired.	Check circuit breaker. Verify all wiring connections are secure. Replace remote battery. Re-pair remote if necessary (refer to remote instructions).
Fan makes excessive noise.	Loose screws; unbalanced blades; motor issue.	Ensure all mounting screws are tight. Check for any obstructions. If noise persists, contact customer support.
Fan wobbles.	Loose mounting bracket; unbalanced blades.	Ensure mounting bracket is securely fastened to the ceiling joist. Check that all blade screws are tight.
Lights flicker or dim unexpectedly.	Loose bulb connection; faulty bulb; wiring issue; receiver issue.	Ensure bulbs are screwed in tightly. Replace bulbs. Check wiring connections. If problem persists, contact customer support as a new receiver might be needed.
Fan turns on randomly.	Remote interference; faulty receiver.	Ensure no other remote controls are interfering. If the issue persists, the receiver may need replacement. Contact customer support.

## 9. WARRANTY AND CUSTOMER SUPPORT

LEDIARY flush mount ceiling fans come with a comprehensive warranty:

- **Motor:** 5-year support
- **Other Parts:** 2-year limited support

We are committed to providing high-quality products and excellent customer service. If you encounter any issues or require technical assistance, please contact LEDIARY customer support. We offer 24-hour online technical support.

For support, please refer to the contact information provided with your purchase or visit the official LEDIARY website.