

- Manuals.plus /
- › LEDIARY /
- › LEDIARY 31.5-inch Dimmable Moon Wall Light User Manual

LEDIARY Dimmable Moon Wall Light

LEDIARY 31.5-inch Dimmable Moon Wall Light User Manual

Model: Dimmable Moon Wall Light

1. PRODUCT OVERVIEW

The LEDIARY 31.5-inch Dimmable Moon Wall Light is a modern LED fixture designed to enhance various indoor spaces. This versatile light offers adjustable brightness (10%-100%) and three color temperature options (Warm White 3000K, Natural White 4500K, Daylight White 6000K), all controllable via an included remote. It features a unique moon design and can be installed using either a plug-in cord or hardwired connection, making it suitable for living rooms, hallways, bedrooms, and other decorative lighting applications.



Image: The LEDIARY 31.5-inch Dimmable Moon Wall Light providing ambient lighting in a living room setting.

2. WHAT'S IN THE BOX

- LED Moon Wall Light Fixture
- Remote Control
- Plug-in Power Cord (9.8ft)
- Installation Hardware (screws, wall anchors, wire connectors)
- User Manual

3. SPECIFICATIONS

Brand	LEDIARY
-------	---------

Model Name	Dimmable Moon Wall Light
Size	31.5 Inch (Diameter)
Product Dimensions	31.5"L x 31.5"W x 3.5"H
Wattage	40 Watts
Brightness	3000 Lumens (Maximum)
Color Temperature	3000K (Warm White), 4500K (Natural White), 6000K (Daylight White)
Dimmability	10% - 100% Stepless Adjustment
Control Method	Remote Control
Installation Type	Plug-in or Hardwired (85V-265V)
Material	Metal (Frame), Acrylic (Light Surface)
Indoor/Outdoor Usage	Indoor Only

Product Parameters

1.5"



31.5"

Color: Black

Area: 25m²

Power: 40W

Space: Aisle/Bedroom/Living room

Material: Iron & Acrylic

Color Temperature: Adjustable Color Temperature

Image: Detailed product parameters and dimensions of the moon wall light.

4. SAFETY INFORMATION

- Always disconnect power before installation, maintenance, or cleaning.
- Ensure all electrical connections comply with local codes and regulations. If unsure, consult a qualified electrician.
- Do not expose the fixture to water or excessive moisture. This product is for indoor use only.
- Handle the light fixture with care to avoid damage.
- Keep the remote control away from children.

5. INSTALLATION

The LEDIARY Moon Wall Light offers two installation methods: plug-in or hardwired. Choose the method that best suits your needs.

5.1. Plug-in Installation

1. Mount the light fixture to the desired wall location using the provided screws and wall anchors.
2. Connect the light's plug cord to a standard wall outlet. The 9.8ft cord provides flexibility for placement.

5.2. Hardwired Installation

1. **Safety First:** Turn off power at the circuit breaker before beginning.
2. Mount the light fixture to the desired wall or ceiling location using the provided screws and wall anchors.
3. Connect the fixture's wires to your household electrical wiring. Match the wires carefully: typically, black to black (live), white to white (neutral), and green/bare copper to green/bare copper (ground). Use the provided wire connectors to secure connections. *Note: Recent product versions include clear wire labels. If wires are not clearly labeled, consult a qualified electrician to ensure correct and safe wiring.*
4. Ensure all connections are secure and insulated.
5. Restore power at the circuit breaker.

| Two Installation Methods

Plug in ▼



Hardwire ▼

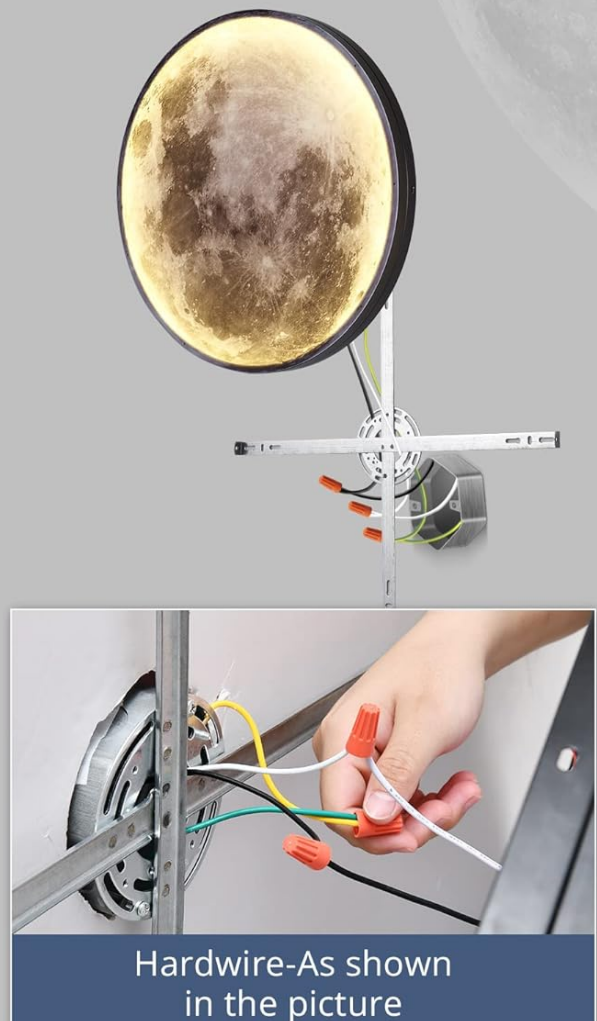


Image: Visual guide for both plug-in and hardwired installation methods.

Video: This video demonstrates the two mounting options for the LEDIARY Moon Wall Light, showing both hardwire and plug-in setups.

6. OPERATING INSTRUCTIONS

The LEDIARY Moon Wall Light is controlled by the included remote control, offering various lighting adjustments.



Image: Key features of the LED Moon Wall Sconce, including remote control functionality.

6.1. Remote Control Functions

- **ON/OFF:** Turn the light on or off.
- **Brightness Adjustment:** Use the '+' and '-' buttons to adjust brightness from 10% to 100%.
- **Color Temperature Adjustment:** Use the 'CCT +/-' buttons to cycle through Warm White (3000K), Natural White (4500K), and Daylight White (6000K). A dedicated button allows quick switching between these colors.
- **Night Light Mode:** Activates a low-brightness, warm light setting.

- **Timer Function:** Press once for 30 minutes (light blinks once), press twice for 1 hour (light blinks twice). Press ON/OFF to shut down the timer.
- **Memory Function:** The light will retain the last used color and brightness setting when turned back on.

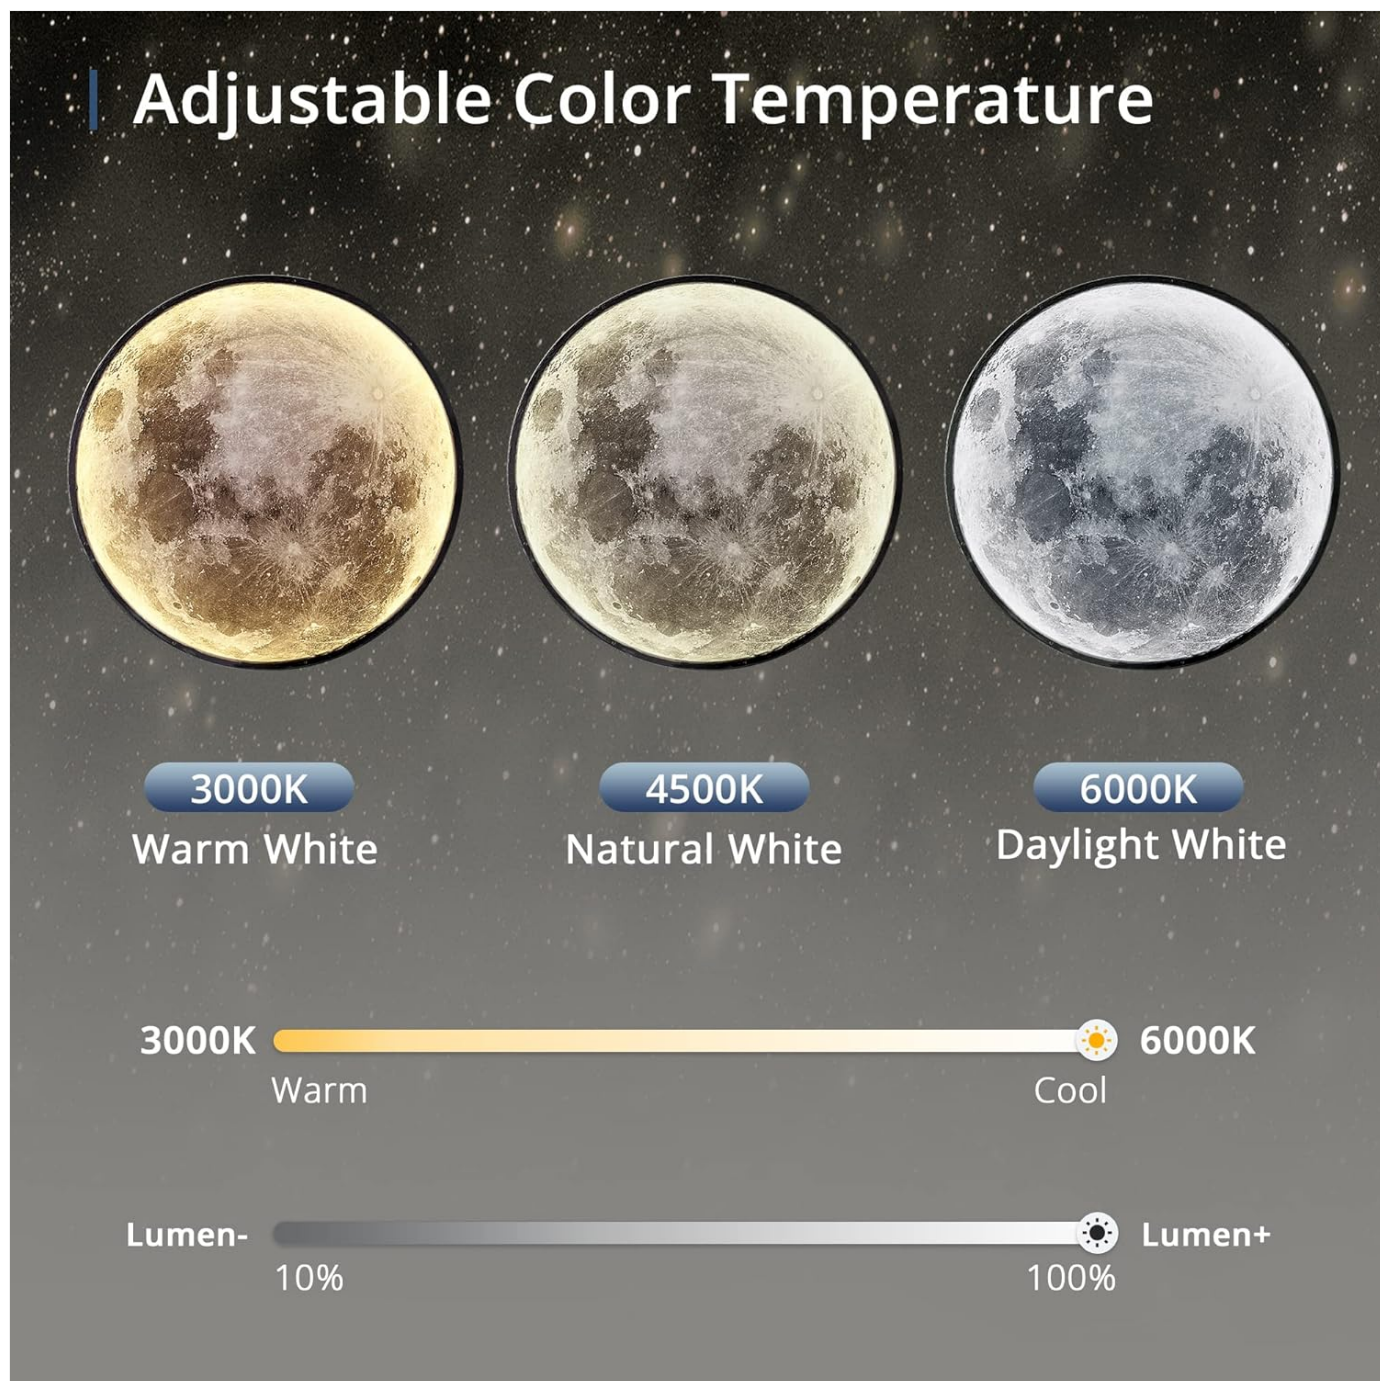


Image: Visual representation of adjustable color temperature and brightness levels.

Video: This video demonstrates the remote control functions, including adjusting brightness, color temperature, and activating night light mode.

6.2. Pairing & Clearing Codes

- **Pairing:** Turn on the main power to the light. Within 3 seconds, quickly press the "ON" button on the remote control once or more. The light will flash 3 times to indicate successful pairing. (The light is typically factory-preset, so pairing may not be needed for first use).
- **Clearing Codes:** Disconnect and then reconnect the power supply to the light. Within 3 seconds, press the "ON" button on the remote control 5 times continuously. The light will flash six times to confirm the code has been successfully cleared.

7. MAINTENANCE

To ensure the longevity and optimal performance of your LEDIARY Moon Wall Light, follow these simple maintenance guidelines:

- **Cleaning:** Gently wipe the surface of the light with a soft, dry, or slightly damp cloth. Avoid using abrasive cleaners, solvents, or harsh chemicals, as these can damage the finish or acrylic surface.
- **Inspection:** Periodically check the power cord (if plug-in) and all connections (if hardwired) for any signs of wear or damage.
- **Bulb Replacement:** The LED light source is integrated and not user-replaceable.

8. TROUBLESHOOTING

If you encounter any issues with your LEDIARY Moon Wall Light, refer to the following table for common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power, loose connection, remote control battery dead.	Check power source/circuit breaker. Ensure all wiring connections are secure. Replace remote control batteries. Re-pair remote if necessary.
Remote control not working.	Remote battery dead, not paired, obstruction.	Replace remote batteries. Ensure direct line of sight to the light. Re-pair the remote control (see Section 6.2).
Light flickers or dims unexpectedly.	Unstable power supply, loose wiring.	Check power connections. Ensure stable power supply. If hardwired, verify connections are tight.
Cannot adjust brightness or color temperature.	Remote control issue, light not responding.	Ensure remote batteries are fresh. Re-pair the remote control (see Section 6.2).
Light is too bright even at lowest setting.	Minimum brightness level is 10%.	The light is designed with a minimum brightness of 10%. If a lower light output is desired for specific ambient conditions, consider additional room lighting adjustments.

If the problem persists after attempting these solutions, please contact customer support.

9. WARRANTY AND SUPPORT

The LEDIARY Moon Wall Light comes with a 3-year support warranty. For any inquiries, technical assistance, or warranty claims, please contact LEDIARY customer service. Our team is available 24 hours online to assist you. Contact information can typically be found on the product packaging or the official LEDIARY website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0C1G8LWCN>

More documents and user manuals: <https://manuals.plus/>