

## VIVO MOUNT-E-UP80D

# VIVO MOUNT-E-UP80D Motorized TV Lift Stand

## INSTRUCTION MANUAL

### 1. Introduction and Safety Information

---

This manual provides instructions for the safe installation, operation, and maintenance of your VIVO MOUNT-E-UP80D Motorized TV Lift Stand. Please read this manual thoroughly before assembly and use to ensure proper function and to prevent injury or damage.

#### Important Safety Warnings:

- Do not exceed the maximum weight capacity of 132 lbs (60 kg).
- This lift is designed for installation inside a cabinet or similar enclosure. It is not intended for freestanding or ceiling mounting.
- Ensure all components are securely fastened before operating the lift.
- Keep hands and objects clear of the lift mechanism during operation to avoid pinching or crushing injuries.
- Disconnect power before performing any maintenance or adjustments.
- Children should not operate the lift without adult supervision.

### 2. Package Contents

---

Verify that all components are present and undamaged. If any parts are missing or defective, please contact VIVO customer support.

- Motorized TV Lift Mechanism
- TV Mounting Brackets
- Remote Control
- Power Adapter
- Hardware Kit (screws, washers, spacers for TV and cabinet mounting)
- Instruction Manual

### 3. Setup and Installation

This motorized TV lift is designed for integration into a cabinet or furniture unit. Proper cabinet construction and secure mounting are essential for stability and safety.



*Image: Diagram illustrating the TV lift mechanism installed within a cabinet structure.*

#### Installation Steps:

1. **Prepare the Cabinet:** Ensure your cabinet is structurally sound and has adequate space for the lift mechanism and your television. Refer to the dimensions in the specifications section.
2. **Assemble the Lift:** Follow the detailed instructions in the included accessory kit to assemble the main lift column and base.
3. **Secure the Lift to the Cabinet:** Position the lift inside the cabinet. Use the provided hardware to securely fasten the lift base to the bottom of the cabinet and, if applicable, the top support to the cabinet structure. This is critical for stability.
4. **Attach TV Mounting Brackets:** Identify the correct VESA mounting pattern on your television. Attach the TV mounting brackets to the back of your TV using the appropriate screws and spacers from the hardware kit.
5. **Mount the TV:** Carefully lift your television and hook the attached mounting brackets onto the lift mechanism. Ensure the TV is level and securely seated.
6. **Connect Power:** Plug the power adapter into the lift and then into a suitable power outlet.



*Image: Example of the TV lift stand integrated into a cabinet, with the TV in the lowered position.*

## 4. Operating Instructions

---

The VIVO MOUNT-E-UP80D is operated using the included remote control.

# REMOTE CONTROL



*Image: Remote control layout with buttons for movement and memory presets.*

## Remote Control Functions:

- **Up Arrow:** Press to raise the television.
- **Down Arrow:** Press to lower the television.
- **Memory Presets (1, 2, 3, 4):** Press to move the television to a saved height position.
- **Set Memory (M button):** To save a height position: Adjust the TV to the desired height using the up/down arrows. Press the 'M' button, then immediately press one of the number buttons (1, 2, 3, or 4) to save the current height to that preset.

# EASY ADJUSTMENTS

helps you find the ideal viewing height



*Image: Demonstrating easy height adjustments with the remote control.*

## 5. Maintenance

---

Regular maintenance ensures the longevity and smooth operation of your TV lift.

- **Cleaning:** Wipe the exterior surfaces with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Inspection:** Periodically check all mounting hardware and connections to ensure they remain tight and secure.
- **Lubrication:** The lift mechanism is pre-lubricated and generally does not require additional lubrication. If you notice unusual friction or noise, contact VIVO support.

## 6. Troubleshooting

---

If you encounter issues with your TV lift, refer to the following common problems and solutions:

| Problem | Possible Cause | Solution |
|---------|----------------|----------|
|---------|----------------|----------|

| <b>Problem</b>                              | <b>Possible Cause</b>  | <b>Solution</b>   |
|---|--|---|
| Lift does not move.                         | No power; Remote control battery low/dead; Remote not paired; Overload protection activated. | Check power connection; Replace remote battery; Repair remote (refer to remote instructions); Allow unit to cool down if 4 beeps are heard (overheat protection). |
| Lift moves unevenly or makes unusual noise. | Obstruction; Loose mounting hardware; Damaged mechanism.                                     | Check for obstructions; Tighten all mounting screws; Contact VIVO support if noise persists or mechanism appears damaged.   |
| Remote control not responding.              | Battery low/dead; Remote out of range; Interference.   | Replace remote battery; Ensure remote is within operating range; Minimize interference from other electronic devices.   |


If troubleshooting steps do not resolve the issue, please contact VIVO customer support for assistance.

## 7. Specifications

---

Detailed technical information for the VIVO MOUNT-E-UP80D Motorized TV Lift Stand.

# MEASUREMENTS

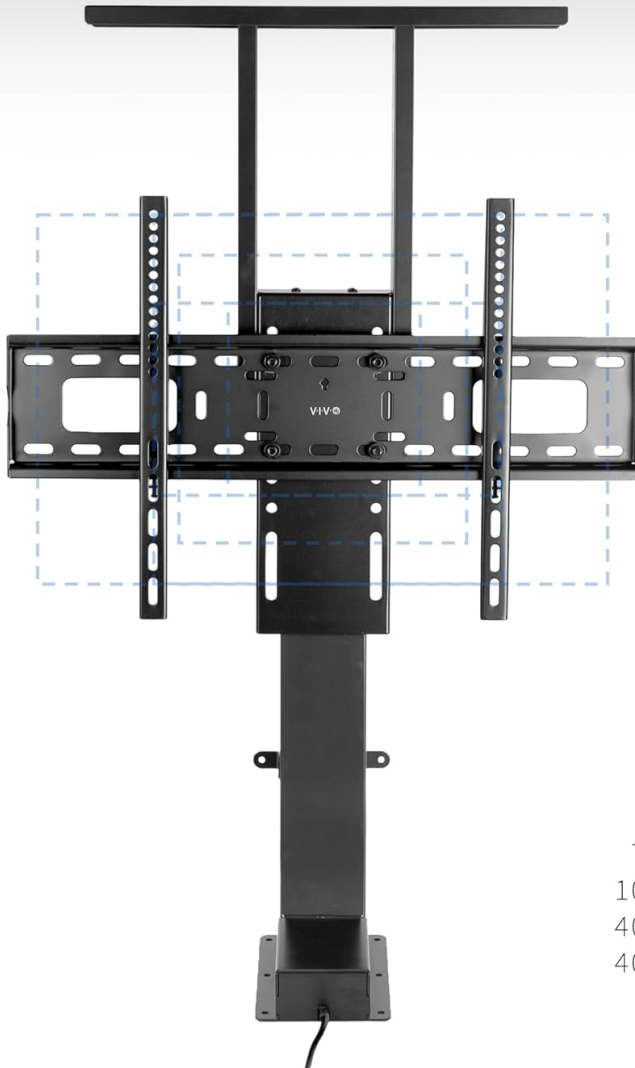

**Screen Size**  
most screens 37" - 77"



**Weight Capacity**  
up to 132 lbs




## VESA Pattern

75x75, 100x100, 200x100,  
100x200, 200x200, 300x200,  
400x200, 200x300, 300x300,  
400x300, 200x400, 300x400,  
400x400, 400x600

*Image: Key measurements and compatibility details.*

- **Model Number:** MOUNT-E-UP80D
- **Screen Size Compatibility:** 37 to 77 inches
- **Weight Capacity:** Up to 132 lbs (60 kg)
- **VESA Mounting Patterns (mm):** 75x75, 100x100, 200x200, 300x200, 400x200, 600x200, 200x300, 300x300, 400x300, 600x300, 350x350, 200x400, 300x400, 400x400, 600x400, 400x600
- **Overall Lowered Height:** 32.8 inches
- **Overall Maximum Height:** 84.3 inches
- **Material:** Alloy Steel, Aluminum
- **Color:** Black
- **Mounting Type:** Cabinet Mount

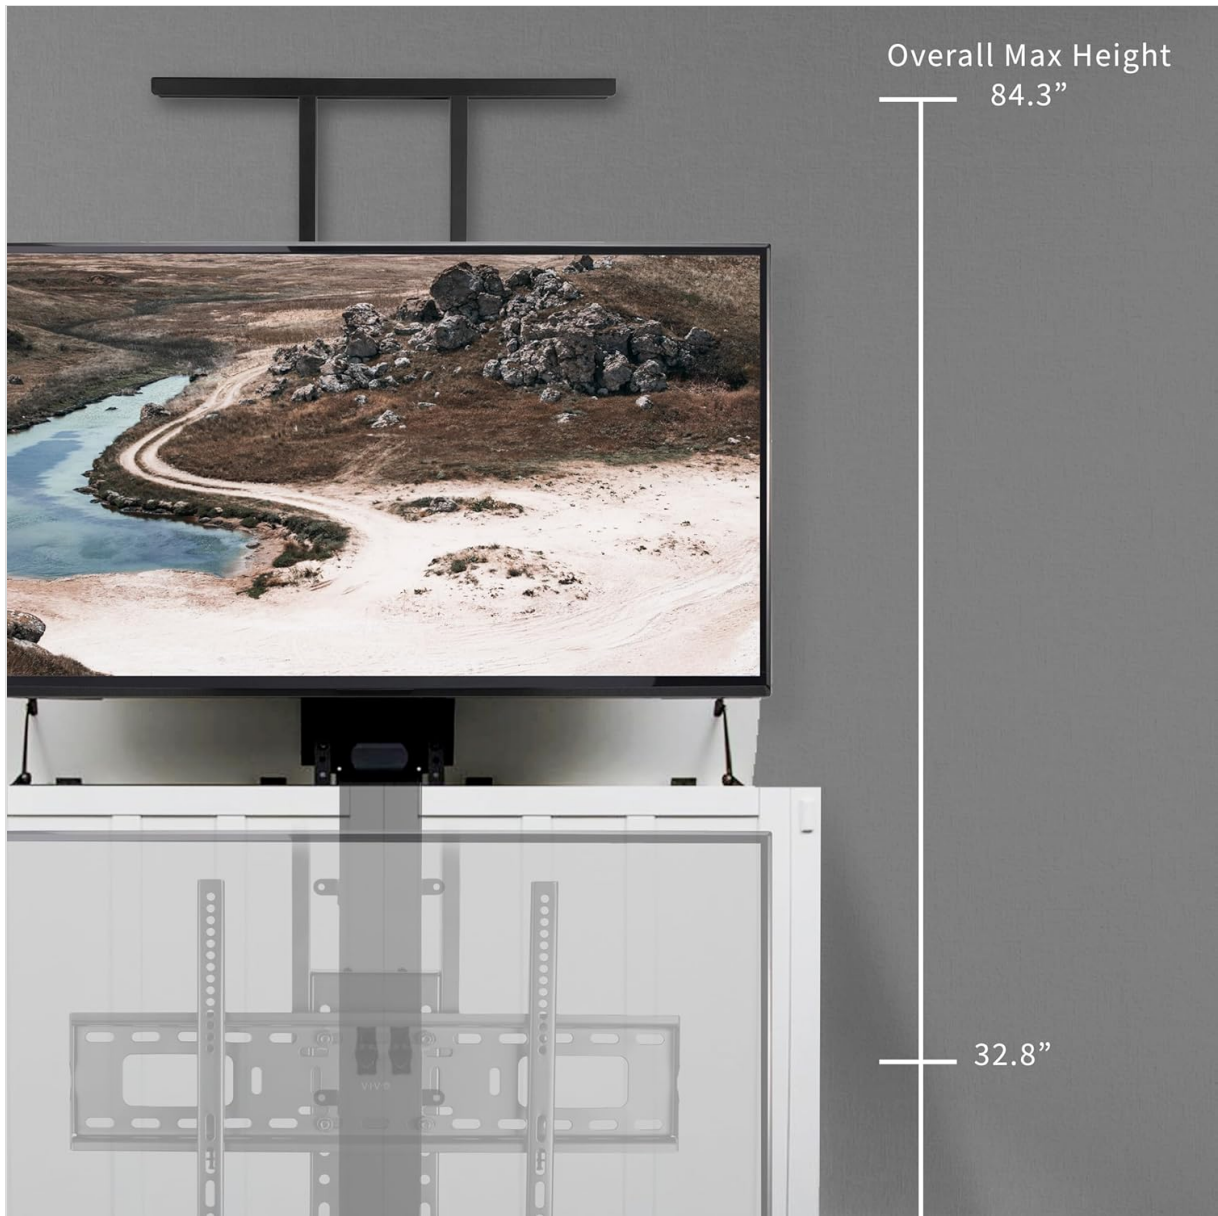

*Image: Illustration of the height adjustment range.*

## 8. Warranty and Support

---

VIVO is committed to providing quality products and customer satisfaction. For warranty information, technical support, or any questions regarding your MOUNT-E-UP80D TV lift, please contact our U.S.-based support team.

### Contact Information:

- Refer to the VIVO official website or product packaging for the most current contact details.
- Online resources and FAQs may also be available.

For more VIVO products and information, visit the [VIVO Store](#).