

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

> [vivihobb](#) /

> [vivihobb VL-01 Farmhouse 2-Light Vanity Light Fixture Instruction Manual](#)

vivihobb VL-01

vivihobb VL-01 Farmhouse 2-Light Vanity Light Fixture

Model: VL-01 | Brand: vivihobb

INTRODUCTION

Thank you for choosing the vivihobb VL-01 Farmhouse 2-Light Vanity Light Fixture. This manual provides essential information for the safe installation, operation, and maintenance of your new lighting fixture. Please read these instructions thoroughly before beginning installation and retain them for future reference.

SAFETY INFORMATION

- **WARNING:** Risk of electric shock. Disconnect power at the fuse box or circuit breaker before installation or servicing.
- All electrical connections must be in accordance with local codes, ordinances, or the National Electric Code (NEC). Consult a qualified electrician if you are unfamiliar with installing electrical fixtures.
- Do not install this fixture in wet locations. It is designed for indoor use only.
- Ensure the mounting surface can support the weight of the fixture.
- Use only E26 base bulbs, maximum 60 watts per bulb.
- Do not exceed the recommended wattage.
- Handle glass components with care to prevent breakage.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Light Fixture Body (Pre-assembled)
- Metal Shades (2x)
- Mounting Hardware Kit (includes mounting plate, screws, wire nuts)
- Instruction Manual

Note: E26 base bulbs are required but not included.

TOOLS REQUIRED

- Phillips Head Screwdriver
- Flat Head Screwdriver
- Wire Strippers
- Pliers
- Electrical Tape
- Ladder

INSTALLATION INSTRUCTIONS

Follow these steps carefully to install your vivihobb vanity light fixture.

Step 1: Prepare for Installation

1. **Turn off power** at the circuit breaker or fuse box to avoid electrical shock.
2. Remove your old fixture (if applicable) and its mounting hardware.

Step 2: Attach Mounting Plate

Secure the mounting plate to your electrical junction box using the provided screws. Ensure the plate is firmly attached and level.



Image: The back of the light fixture showing the pre-assembled mounting bracket and wiring points, indicating ease of installation.

Step 3: Make Electrical Connections

1. Connect the fixture's **black wire** to the house's **black wire** (live) using a wire nut.
2. Connect the fixture's **white wire** to the house's **white wire** (neutral) using a wire nut.
3. Connect the fixture's **ground wire** to the house's **ground wire** (bare copper or green) using a wire nut.
4. Carefully tuck all wires into the junction box.

Step 4: Mount the Fixture Body

Align the fixture body with the mounting plate and secure it with the decorative nuts or screws provided. Ensure the fixture is flush against the wall.

Step 5: Install Bulbs and Shades

1. Screw in two E26 base bulbs (not included) into the sockets. Do not exceed 60 watts per bulb.
2. Attach the metal shades to the fixture by screwing them onto the socket rings.

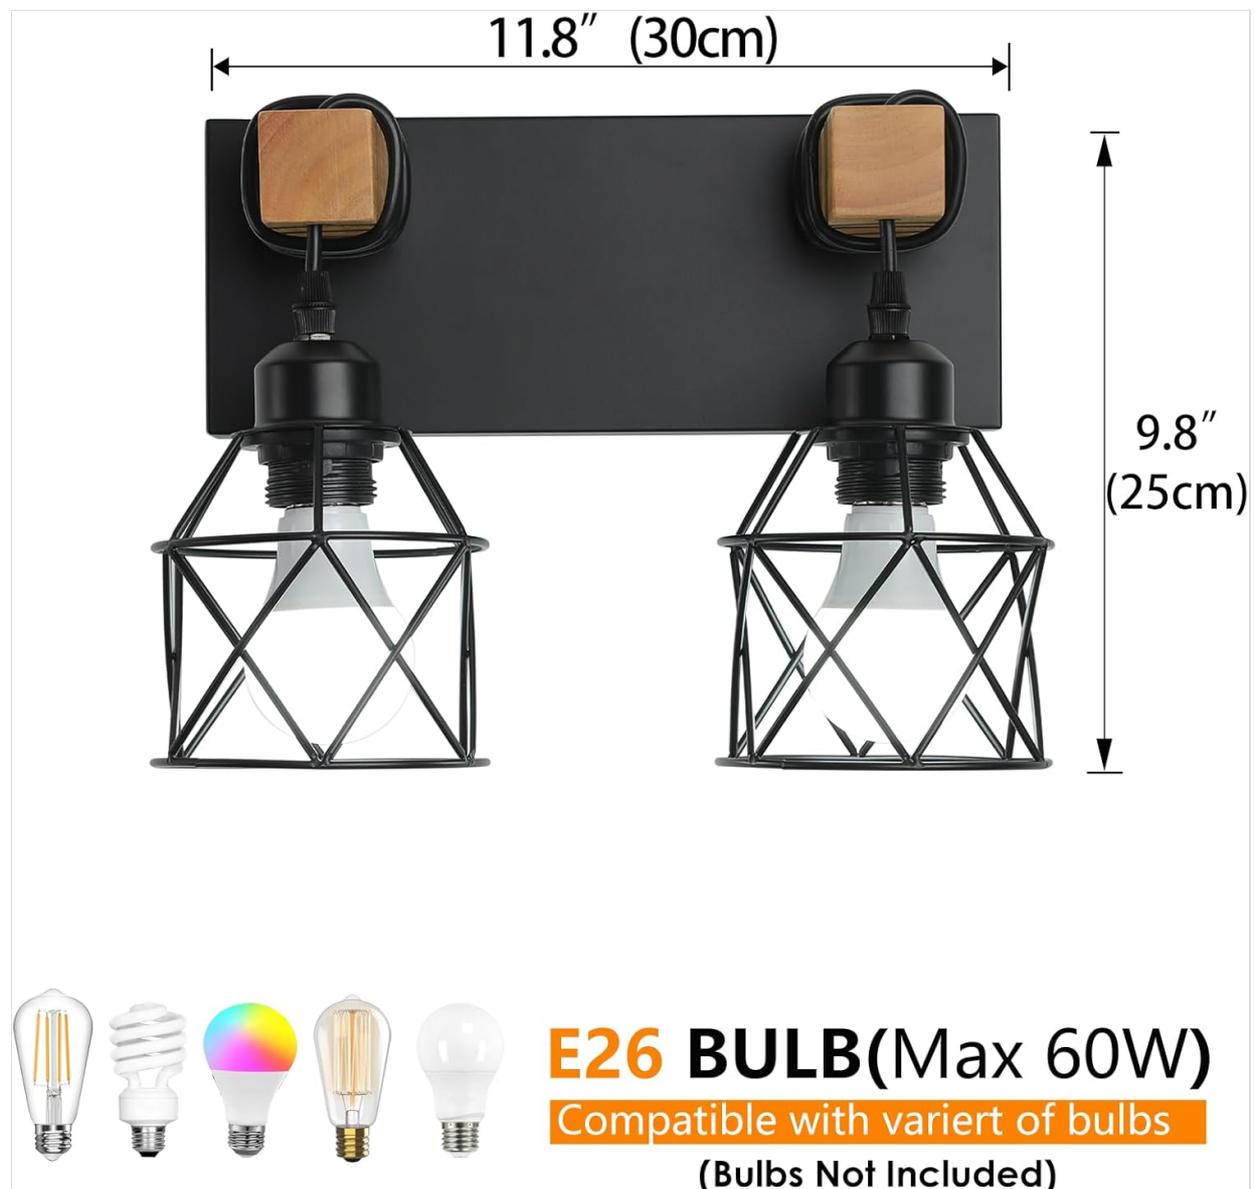


Image: A diagram illustrating the fixture's dimensions (11.8"L x 9.8"H) and indicating compatibility with various E26 bulb types (max 60W).



Image: An illustration displaying different styles of E26 base bulbs (ST58, A21, T45, G25, ST64) that can be used with the fixture.

Step 6: Restore Power

Once installation is complete, turn the power back on at the circuit breaker or fuse box. Test the light fixture.

OPERATING INSTRUCTIONS

The vivihobb VL-01 vanity light fixture operates via a standard wall switch (not included). Once installed and powered, simply use your existing wall switch to turn the light on or off.

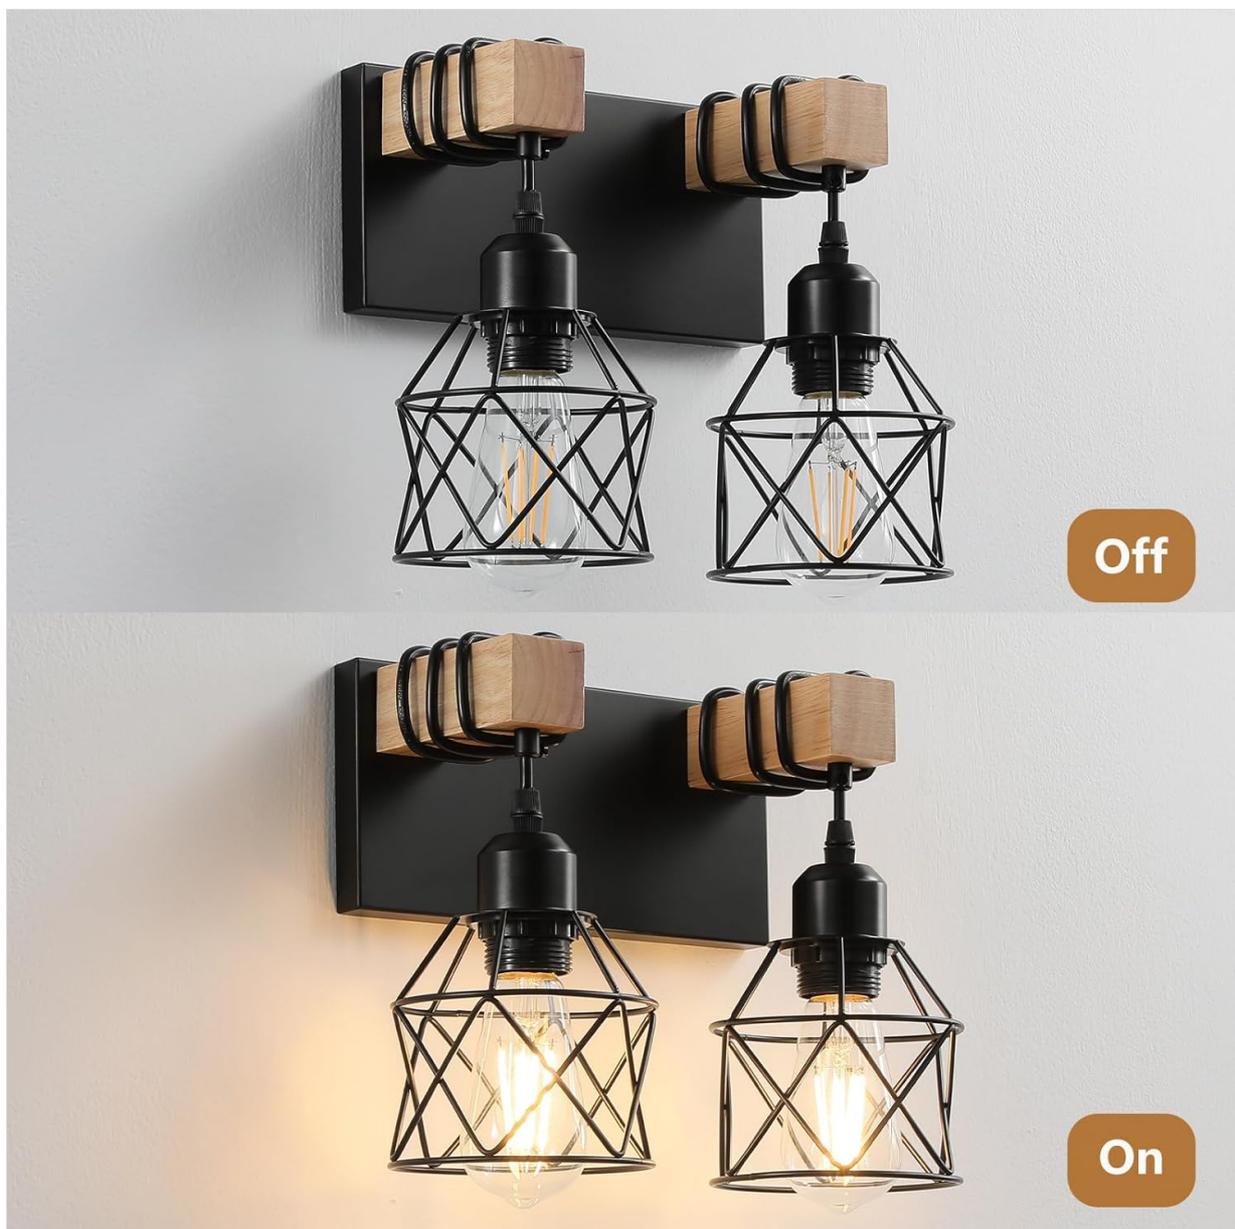


Image: A visual comparison of the light fixture when turned off and when illuminated, showcasing its functional appearance.

MAINTENANCE

Cleaning

To clean the fixture, ensure the power is off. Wipe with a soft, dry cloth. Do not use abrasive cleaners or solvents, as they may damage the finish.

Bulb Replacement

Always turn off the power before replacing bulbs. Allow bulbs to cool completely before touching. Unscrew old bulbs and replace with new E26 base bulbs, maximum 60 watts.

TROUBLESHOOTING

| Problem | Possible Cause | Solution |
|---------|----------------|----------|
|---------|----------------|----------|

| Problem | Possible Cause | Solution |
|------------------------|--|---|
| Light does not turn on | <ol style="list-style-type: none"> 1. Power is off. 2. Loose wiring connection. 3. Faulty bulb. | <ol style="list-style-type: none"> 1. Check circuit breaker/fuse. 2. Verify all wire connections are secure (power off). 3. Replace bulb. |
| Light flickers | <ol style="list-style-type: none"> 1. Loose bulb. 2. Incompatible dimmer switch. 3. Loose wiring. | <ol style="list-style-type: none"> 1. Tighten bulb. 2. Ensure dimmer is compatible with LED bulbs (if using LED). 3. Check wiring connections (power off). |
| Fixture is hot | Bulb wattage too high. | Replace with lower wattage bulbs, not exceeding 60W per bulb. |

SPECIFICATIONS

| Feature | Detail |
|-------------------------|------------------------------|
| Model Number | VL-01 |
| Brand | vivihobb |
| Color | Black |
| Material | Metal, Wood |
| Style | Farmhouse |
| Light Fixture Form | Vanity |
| Room Type | Bathroom |
| Product Dimensions | 8.3"L x 11.8"W x 8.3"H |
| Specific Uses | Indoor use only |
| Power Source | AC |
| Installation Type | Semi Flush Mount |
| Light Source Type | LED (compatible) |
| Number of Light Sources | 2 |
| Voltage | 120 Volts |
| Wattage | 60 watts (max per bulb) |
| Bulb Base | E26 |
| Included Components | Mounting Hardware |
| Item Weight | 3.49 pounds (1.59 Kilograms) |

| Feature | Detail |
|-------------------|--------|
| Assembly Required | Yes |

WARRANTY AND SUPPORT

vivihobb offers a **3-year warranty** for this product, covering free return and exchange within this period. We also provide lifetime after-sales support. Our professional technical staff are available to assist you, with service responses typically within 12 hours.



Image: A golden badge indicating an extended 3-year warranty for the product.

For technical assistance, warranty claims, or any questions regarding your vivihobb product, please contact our customer support team.