

[Manuals.plus](#) /

› [Hocosyme](#) /

› Hocosyme Infrared Heater CZ-C-800W User Manual

Hocosyme CZ-C-800W

Hocosyme Infrared Heater CZ-C-800W User Manual

Model: CZ-C-800W

1. IMPORTANT SAFETY INSTRUCTIONS

Please read all safety instructions carefully before using the Hocosyme Infrared Heater. Failure to follow these instructions may result in electric shock, fire, or serious injury.



Warning



Hinweis: Vorsicht vor Verbrennungen
Bei der Verwendung von Kindern und
Haustieren fernhalten.

Nota: fare attenzione alle ustioni
Tenere lontano dalla portata dei
bambini e degli animali domestici
durante l'utilizzo.

Note: Be careful of burns
Please keep away from children
and pets when using.

Remarque: faites attention aux brûlures
Tenir à l'écart des enfants et des animaux
domestiques lors de l'utilisation.

Uwaga: Uważaj na oparzenia
Podczas używania należy trzymać z
dala od dzieci i zwierząt domowych.

Nota: tenga cuidado con las quemaduras
Mantener alejado de los niños y las
mascotas cuando lo utilice.

Obs: Var försiktig med
brännskador
Håll dig borta från barn och
husdjur när du använder den.

Let op: Wees voorzichtig met
brandwonden
Houd het apparaat tijdens gebruik uit
de buurt van kinderen en huisdieren.

Image Description: A warning label indicating caution against burns and advising to keep children and pets away from the heater during operation. The warning is provided in multiple languages including English, German, Italian, French, Spanish, Polish, Swedish, and Dutch.

- **Burn Hazard:** Be careful of burns. The heater surface can reach high temperatures (up to 120 degrees Celsius).
- **Keep Away:** Keep children and pets away from the heater during operation.
- **Placement:** Ensure the heater is installed on a stable, non-combustible surface or wall.
- **Ventilation:** Do not cover the heater or block its ventilation openings.
- **Power Cord:** Do not place the power cord under carpets or in areas where it can be tripped over or damaged.
- **Moisture:** Do not use the heater in wet or damp locations. The unit has an IP54 rating, meaning it is protected against dust and splashing water, but it is not submersible.
- **Maintenance:** Do not attempt to repair or modify the heater yourself. Contact qualified service personnel for any repairs.

2. PRODUCT OVERVIEW

The Hocosyme CZ-C-800W is an 800-watt infrared heater designed for efficient and quiet heating of indoor spaces. It features a smart touch thermostat and can be wall-mounted.




Image Description: The Hocosyme Infrared Heater, a rectangular white panel, shown with its integrated smart touch thermostat unit connected via a cable. The heater has a TÜV certification mark on the bottom right.

Key Features:

- **Smart Touch Thermostat:** Features child protection, temperature control via simple touch, and time-controlled on/off functions with 3 selectable modes.
- **Rapid Heating:** Reaches maximum operating temperature of up to 120 degrees Celsius within 1-3 minutes.
- **Energy Efficient:** Utilizes graphene technology to reduce power consumption while generating significant heat, suitable for 8-20 m² spaces.
- **Infrared Technology:** Provides heat similar to natural sunlight, ensuring even room temperature without air circulation, maintaining indoor humidity, and operating silently.
- **Safety Certified:** TÜV certified with overheating protection, ensuring 100% safe operation. IP54 rated for protection against dust and splashing water.



Image Description: A diagram highlighting the features of the smart thermostat: Touch Switch Machine, 3 Operation Modes, Quick Heating in 2 seconds, Adjustable Thermostat, and Safety Features. The thermostat displays '25' and '30' with a green indicator light.

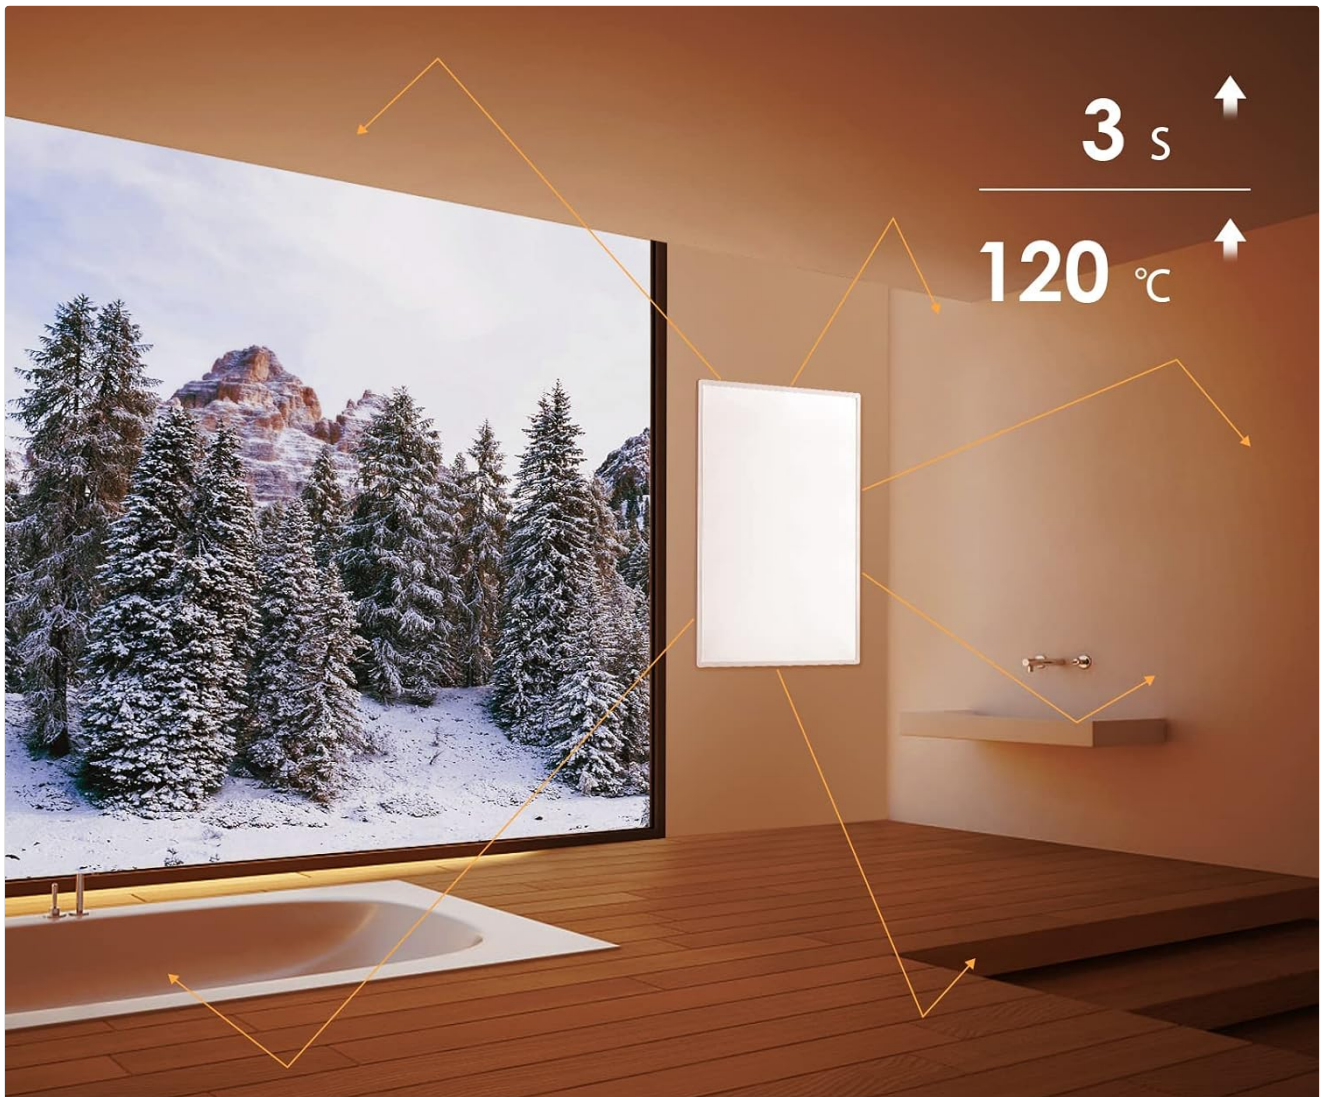

Gleichmäßige Erwärmung durch Infrarotstrahlen im ganzen Raum.
Rapid heating in 3 minutes, up to 120 degrees Celsius.

Image Description: An illustration showing infrared rays emanating from the heater, evenly distributing warmth throughout a room with a large window view of a snowy landscape. Text indicates rapid heating in 3 minutes up to 120 degrees Celsius.

Hanging On The Wall



Roller Bracket Support



0 Noise



0 Humidity
Consumption



0 Fire Hazard



IP54 Waterproof
Rating

Image Description: A split image showing the heater mounted on a wall in a living room setting and also on a roller bracket support. Icons below highlight key benefits: 0 Noise, 0 Humidity Consumption, 0 Fire Hazard, and IP54 Waterproof Rating.

3. PACKAGE CONTENTS

Verify that all items listed below are included in your package. If any items are missing or damaged, please contact customer support.

**Two-pin euro plug,
1.80 m cable length**



Mounting material



Screws



Spacers

Drilling Template

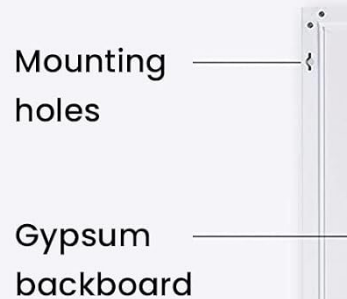


Image Description: This image displays the mounting materials including screws and spacers, a drilling template for installation, and the thermostat unit with its 1.80m two-pin Euro plug cable.

- Hocosyme Infrared Heater Unit (CZ-C-800W)
- Smart Touch Thermostat with 1.8m Safety Cable (Two-pin Euro plug)
- Mounting Material (Screws and Spacers)
- Drilling Template
- Instruction Manual (This document)

Note: Hocosyme Infrared Heater Legs (roller bracket support) must be purchased separately if floor standing is desired.

4. INSTALLATION AND SETUP

The Hocosyme Infrared Heater is designed for easy wall mounting. Follow these steps for secure installation.

Wall Mounting Instructions:

1. **Choose Location:** Select a suitable wall location, ensuring it is a flat, stable surface and away from flammable materials.
2. **Mark Drilling Points:** Use the provided drilling template to mark the positions for mounting holes on the wall. Ensure the marks are level and accurately spaced.
3. **Drill Holes:** Drill holes at the marked positions. The size of the drill bit should match the provided screws and wall plugs.
4. **Insert Wall Plugs:** Insert the wall plugs into the drilled holes.
5. **Attach Spacers:** Place the spacers between the heater and the wall at the mounting points.
6. **Mount Heater:** Align the heater with the drilled holes and secure it to the wall using the provided screws. Ensure the heater is firmly attached and stable.
7. **Connect Power:** Plug the two-pin Euro plug of the thermostat into a suitable power outlet.

The heater is equipped with an insulated flame retardant plasterboard back wall for safety.

5. OPERATION

The smart touch thermostat allows for easy control of your infrared heater.

Thermostat Functions:

- **Power On/Off:** Touch the designated power button to turn the heater on or off.
- **Temperature Adjustment:** Use the '+' and '-' buttons to increase or decrease the desired temperature. The current temperature setting will be displayed.
- **Mode Selection:** Cycle through the 3 available operating modes by pressing the mode button. Refer to the thermostat display for the active mode.
- **Timer Function:** Set a timer for automatic on or off operation using the timer button. Follow the on-screen prompts to configure the desired duration.
- **Child Protection:** The thermostat includes a child protection feature. Consult the thermostat's specific instructions for activation and deactivation of this function.

The heater operates silently and does not cause air heat circulation, which helps maintain consistent room temperature and humidity levels.

6. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your infrared heater.

- **Cleaning:** Ensure the heater is unplugged and completely cool before cleaning. Wipe the surface with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Storage:** If storing the heater for an extended period, ensure it is clean and dry. Store it in a cool, dry place, preferably in its original packaging.
- **Inspection:** Periodically check the power cord and plug for any signs of damage. If damage is found, discontinue use and contact customer support.

7. TROUBLESHOOTING

If you encounter issues with your Hocosyme Infrared Heater, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Heater does not turn on.	No power supply. Thermostat is off.	Check if the power cord is securely plugged into a working outlet. Ensure the thermostat is powered on.
Heater is on but not heating.	Temperature setting is too low. Overheating protection activated.	Increase the desired temperature setting on the thermostat. Unplug the heater, allow it to cool down for 30 minutes, then plug it back in. Ensure proper ventilation.
Thermostat display is not working.	Power issue. Thermostat malfunction.	Check power connection. If problem persists, contact customer support.

If the problem persists after attempting these solutions, please contact customer support for further assistance.

8. SPECIFICATIONS

Detailed technical specifications for the Hocosyme Infrared Heater CZ-C-800W.



Image Description: A diagram showing the dimensions of the infrared heater: 119.5 cm height, 59.5 cm width, and 2.2 cm thickness. The weight is indicated as 7 kg.

Feature	Specification
Brand	Hocosyme
Model	CZ-C-800W
Power Source	Corded Electric
Voltage	230 Volts (AC)
Wattage	800 Watts

Feature	Specification
Material Type	Touch-C
Mounting Type	Wall Mount
Product Dimensions	2.2 x 59.5 x 119.5 cm
Item Weight	7.16 Kilograms
Special Features	Automatic shutdown, Touch Thermostat, Child Protection
IP Rating	IP54
Certifications	TÜV: N8A 093222 0014 REV.01

9. WARRANTY AND SUPPORT

Hocosyme is committed to providing reliable products and customer satisfaction.

- **Warranty:** If the product breaks down within one year of purchase, it will be immediately replaced with a new one.
- **Customer Support:** For any questions, technical assistance, or warranty claims, please contact Hocosyme customer support through your retailer or the official brand website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question