

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [HP](#) /

› [HP Laser 1008a Printer User Manual](#)

HP 1008a

HP Laser 1008a Printer User Manual

Model: 1008a (714Z8A)

INTRODUCTION

This manual provides detailed instructions for the HP Laser 1008a Single Function Printer. Please read this manual thoroughly before operating your printer to ensure proper setup, usage, and maintenance. Retain this manual for future reference.



Image: The HP Laser 1008a printer, a compact white and black device, shown with its accompanying toner cartridge box.

WHAT'S IN THE BOX

Verify that all components are present before proceeding with the setup:

- HP Laser 1008a Printer
- HP Black Contractual Original Laser Toner Cartridge
- Setup Guide
- Flyer
- Power Cord
- USB Cable

SETUP INSTRUCTIONS

1. Unpacking the Printer

1. Remove the printer from its packaging.
2. Remove all protective tapes and packing materials from the printer.

2. Installing the Toner Cartridge

1. Open the toner access door on the printer.
2. Remove the new toner cartridge from its packaging and gently shake it to distribute the toner.
3. Insert the toner cartridge into the designated slot until it clicks into place.
4. Close the toner access door.

3. Loading Paper

1. Open the 150-sheet input tray.
2. Adjust the paper guides to fit the paper size.
3. Load up to 150 sheets of paper into the input tray.
4. Extend the 100-sheet output tray.

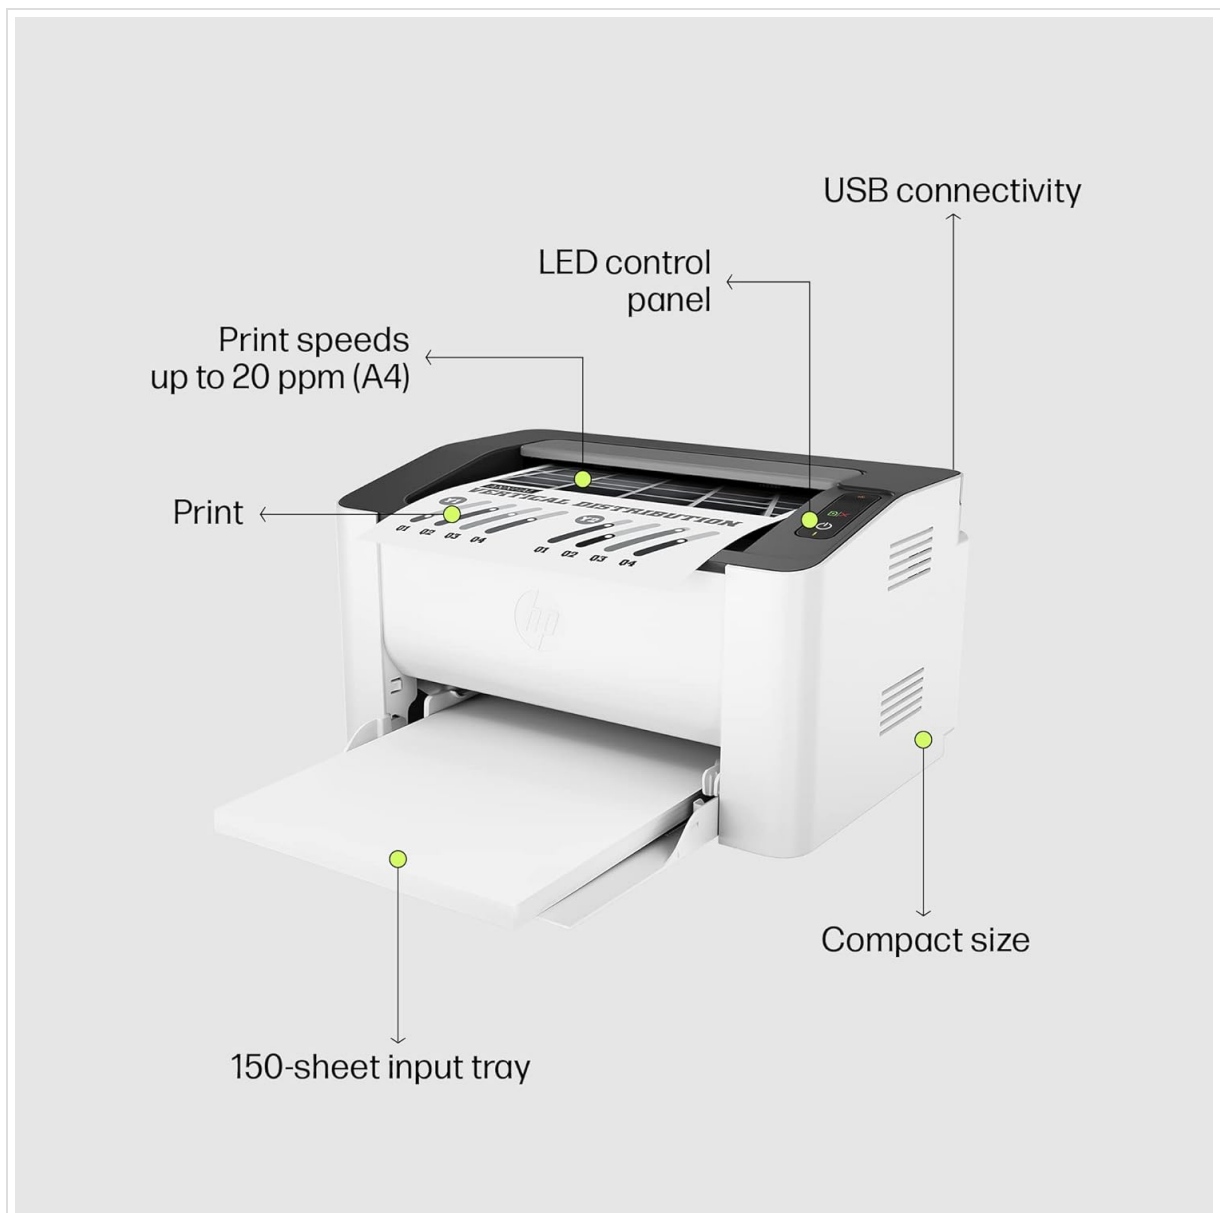


Image: The HP Laser 1008a printer with paper loaded in the input tray, illustrating its compact design and key features like USB connectivity and LED control panel.

4. Connecting the Printer

1. Connect the power cord to the printer and then to a wall outlet.
2. Connect the USB cable from the printer to your computer.

5. Installing Printer Software/Drivers

- For Windows 11/10/7: The operating system may automatically detect the printer and install the necessary drivers. If not, visit the official HP support website to download the latest drivers for your model.
- For macOS 10.5/11/12: The operating system may automatically detect the printer and install the necessary drivers. If not, visit the official HP support website to download the latest drivers.
- For Linux: Refer to the HP support website for Linux driver installation instructions.

OPERATING INSTRUCTIONS

Powering On/Off

- Press the **Power** button on the control panel to turn the printer on or off.
- The printer features HP Auto-Off Technology, which automatically turns off the device when not in use to save energy.

Printing a Document

1. Ensure the printer is powered on and connected to your computer.
2. Load paper into the input tray.
3. Open the document you wish to print on your computer.
4. Select **Print** from the application's menu (e.g., File > Print).
5. Choose the **HP Laser 1008a** from the list of available printers.
6. Adjust print settings as needed (e.g., number of copies, paper size, print quality).
7. Click **Print**.

Manual Two-Sided Printing

The HP Laser 1008a supports manual two-sided printing. Follow the on-screen prompts from your computer's print dialogue box to print on both sides of the paper. Typically, you will print one side, then flip and re-insert the paper into the input tray as instructed.

HP Laser 1008a



Print Scan Copy Fax



Print speeds
up to 20 ppm (A4)



USB connectivity



150-sheet input tray

Additional features

- LED control panel
- HP Auto-Off Technology
- Manual two-sided printing

Image: A close-up of the HP Laser 1008a printer's control panel, highlighting the LED indicator lights for Power, Toner, and Attention, and the power button.

MAINTENANCE

Cleaning the Printer

- Regularly wipe the exterior of the printer with a soft, lint-free cloth.
- Do not use abrasive cleaners or solvents.
- For internal cleaning, refer to the detailed instructions on the HP support website or the included setup guide.

Replacing the Toner Cartridge

When the **Toner** LED indicator light illuminates or print quality degrades, it may be time to replace the toner cartridge.

1. Ensure the printer is powered on.
2. Open the toner access door.

3. Carefully remove the old toner cartridge.
4. Unpack a new HP Black Contractual Original Laser Toner Cartridge.
5. Gently shake the new cartridge to distribute the toner.
6. Insert the new cartridge into the printer until it locks into place.
7. Close the toner access door.
8. Recycle the old toner cartridge according to local regulations.

TROUBLESHOOTING

Common Issues and Solutions

Problem	Possible Cause / Solution
Printer not responding	<ul style="list-style-type: none"> • Ensure power cord is securely connected. • Check if the printer is powered on. • Verify USB cable connection to both printer and computer. • Restart both the printer and computer.
Poor print quality (faded, streaks)	<ul style="list-style-type: none"> • Toner cartridge may be low or empty. Replace if necessary. • Ensure the toner cartridge is properly installed. • Check paper quality and type.
Paper jams	<ul style="list-style-type: none"> • Remove any jammed paper carefully, following instructions in the setup guide. • Ensure paper is loaded correctly and not overfilled. • Use recommended paper types.
"Attention" LED is blinking	<ul style="list-style-type: none"> • Indicates a warning or error. Check the printer's status on your computer for specific error messages. • Could be a paper jam, open cover, or other issue requiring attention.

For more detailed troubleshooting, refer to the HP support website or contact customer support.

SPECIFICATIONS

Feature	Detail
Model Name	HP Laser 1008a

Feature	Detail
Functions	Print Only
Print Technology	Laser
Print Speed (Monochrome)	Up to 21 ppm (A4)
First Page Out (Black)	As fast as 8.3 seconds
Print Resolution (Black)	Up to 1200 x 1200 dpi
Duty Cycle (Monthly, A4)	Up to 10,000 pages
Recommended Monthly Page Volume	100 to 1,500 pages
Input Tray Capacity	150 sheets
Output Tray Capacity	100 sheets
Media Sizes Supported	A4, A5, A5(LEF), B5 (JIS), Oficio, C5, DL envelopes, 4x6 inch
Media Types Supported	Plain, Thick, Thin, Cotton, Color, Preprinted, Recycled, Labels, CardStock, Bond, Archive, Envelope
Connectivity	Hi-Speed USB 2.0
Duplex Printing	Manual
Control Panel	3 LED indicator lights (Power, Toner, Attention), Buttons
Compatible Operating Systems	Windows 11/10/7, macOS 10.5/11/12, Linux
Dimensions (W x D x H)	33.1 x 17.8 x 21.5 cm (13.03 x 7.01 x 8.46 inches)
Weight	5.4 kg (11.9 lbs)
Power Consumption	HP Auto-Off Technology for energy saving

WARRANTY AND SUPPORT

Warranty Information

The HP Laser 1008a Printer comes with a **1-year limited hardware warranty**. Please retain your proof of purchase for warranty claims.

Customer Support

For technical assistance or support, please contact HP customer service:

- **Voice Support:** Available 12x7
- **Chat Support:** Available 24x7

- Visit the official [HP Support Website](#) for drivers, manuals, and additional resources.