



Manuals.plus /

› HOMEKANE /

› HOMEKANE Handheld Cordless Vacuum Cleaner Instruction Manual

## HOMEKANE B0C2TYW9J1

# HOMEKANE Handheld Cordless Vacuum Cleaner Instruction Manual

Model: B0C2TYW9J1

## 1. PRODUCT OVERVIEW

---

The HOMEKANE Handheld Cordless Vacuum Cleaner is designed for efficient and convenient cleaning in various environments, including homes and vehicles. It features powerful suction, a lightweight design, and multiple accessories for versatile use.



Image 1.1: The HOMEKANE Handheld Cordless Vacuum Cleaner, its charging dock, and included accessories such as the flat nozzle, brush nozzle, and extension hose.

### Package Contents:

- Handheld Cordless Vacuum Cleaner
- Charging Dock
- Flat Nozzle
- Brush Nozzle
- Extension Hose
- HEPA Filter (pre-installed)
- USB Charging Cable

## 2. SETUP AND CHARGING

---

## Initial Charging:

1. Place the vacuum cleaner onto the charging dock. Ensure the charging contacts align properly.
2. Connect the USB charging cable to the charging dock and plug the other end into a suitable USB power adapter (not included) or a USB port.
3. The indicator light on the vacuum will illuminate to show it is charging. A full charge typically takes 3-4 hours.
4. Before first use, ensure the vacuum is fully charged to maximize battery life and performance.

**Important:** Always check the charging dock for any foreign objects before placing the vacuum to charge, as this can interfere with the charging process.



## 2-IN-1 CHARGING AND STORAGE DOCK

Multiple charging methods to meet yours



Image 2.1: The vacuum cleaner positioned on its charging dock, illustrating its compact dimensions (36.5cm/14.3inch height, 9cm/3.5inch width) and indicating a 2000mAh\*3 battery capacity, Type-C charging port, 25-30 minutes run time, and a 1M charging cable.

## Attaching Accessories:

To attach an accessory, simply align it with the vacuum's suction inlet and push firmly until it clicks into place. To remove, pull the accessory away from the inlet.

### 3. OPERATION

#### Powering On/Off:

- To turn on the vacuum, press the power switch located on the handle.
- To turn off the vacuum, press the power switch again.



Image 3.1: Detailed diagram highlighting key components of the vacuum cleaner, including the power switch, dust cup release button, HEPA filter, 550ml dust cup, check valve, air inlet, air outlet, and charging storage dock.

#### Using the Vacuum:

The vacuum provides up to 9500Pa of suction power, suitable for various cleaning tasks. Its low noise operation (below 69dB) ensures a quiet cleaning experience.




Image 3.2: This graphic demonstrates the vacuum's 9500Pa strong suction capability, effectively removing various debris such as dust, pet hair, soot, cat litter, fruit peel, and food scraps.

### Accessory Usage:

- **Flat Nozzle:** Ideal for cleaning narrow gaps, crevices, and corners, such as between sofa cushions or car seats.
- **Brush Nozzle:** Suitable for cleaning carpets, keyboards, pet hair, and other surfaces that require gentle agitation to dislodge debris.
- **Extension Hose:** Provides extended reach for hard-to-access areas, including under furniture or deep within car interiors.

## 3 IN 1 MULTIFUNCTIONAL ACCESSORIES

Removing garbage from various corners

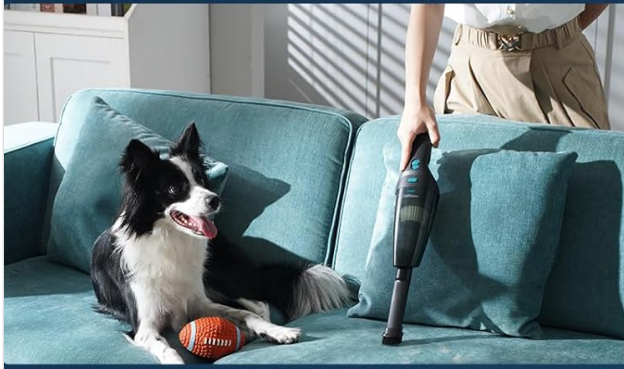

**Brush Nozzle**



**Flat Nozzle**



**Extension Hose**

Image 3.3: This image displays the vacuum cleaner being used with its three multifunctional accessories: the brush nozzle for upholstery, the flat nozzle for tight spaces, and the extension hose for reaching difficult areas.

The lightweight and cordless design allows for easy maneuverability and cleaning in various locations without being restricted by power outlets.

# WASHABLE DUST CUP & HEPA FILTER



Image 3.4: A woman is shown easily cleaning crumbs from a table with the lightweight and wireless vacuum cleaner while holding a baby, demonstrating its portability and ease of use.

## 4. MAINTENANCE

---

### Emptying the Dust Cup:

The vacuum features a 550ml detachable dust cup. It is recommended to empty the dust cup after each use or when it appears full to maintain optimal suction power.

1. Press the dust cup release button (refer to Image 3.1 for location).
2. Carefully detach the dust cup from the main body of the vacuum.
3. Empty the contents of the dust cup into a waste bin.

### Cleaning the HEPA Filter:

The reusable and washable HEPA filter is crucial for effective filtration and preventing dust from entering the motor. Regular cleaning is essential for maintaining strong suction.

1. After emptying the dust cup, remove the HEPA filter from inside the dust cup.

2. Rinse the HEPA filter and the dust cup under running water until clean.
3. Allow the filter and dust cup to air dry completely before reassembling. Ensure they are thoroughly dry to prevent mold growth and maintain performance.
4. Once dry, reinsert the HEPA filter into the dust cup, then reattach the dust cup to the vacuum cleaner.



Image 4.1: A step-by-step visual guide demonstrating the process of removing the dust cup, taking out the filter, emptying the dust cup, cleaning the filter and dust cup with water, and finally, natural air-drying of the components.

**Note:** Do not use harsh detergents or abrasive materials to clean the filter or dust cup. Only use water.

## 5. TROUBLESHOOTING

### Reduced Suction:

- **Check Dust Cup:** Ensure the dust cup is not full and has been emptied.
- **Clean Filter:** A clogged HEPA filter can significantly reduce suction. Clean the filter as described in the Maintenance section and ensure it is completely dry before reinstallation.
- **Blockages:** Inspect the suction inlet, accessories, and internal pathways for any blockages. Remove any debris that may be obstructing airflow.

### Vacuum Not Charging:

- **Check Connections:** Ensure the USB charging cable is securely connected to both the charging dock and the power source.
- **Inspect Charging Dock:** Verify that there are no foreign objects obstructing the charging contacts on the dock or the vacuum.
- **Power Source:** Confirm that the USB power adapter or port is functioning correctly. Try a different power source if necessary.

### Unusual Noises:

- **Blockages:** Unusual noises can indicate a blockage in the suction path or motor. Turn off the vacuum and check for any obstructions.
- **Filter Installation:** Ensure the HEPA filter is correctly installed and seated properly.

If problems persist after attempting these troubleshooting steps, please contact customer support.

## 6. SPECIFICATIONS

---

<b>Brand</b>	HOMEKANE
<b>Model</b>	B0C2TYW9J1
<b>Suction Power</b>	9500Pa
<b>Battery Capacity</b>	3 x 2000mAh Lithium Batteries
<b>Runtime</b>	25-30 minutes
<b>Charging Time</b>	3-4 hours
<b>Dust Cup Capacity</b>	0.55 liters
<b>Noise Level</b>	Below 69dB
<b>Filter Type</b>	HEPA (Washable)
<b>Power/Wattage</b>	100 watts
<b>Voltage</b>	12 Volts (DC)
<b>Product Dimensions</b>	34.01 x 8 x 8.99 cm
<b>Item Weight</b>	558 g (1.23 Pounds)
<b>Color</b>	Black+green

## 7. WARRANTY AND SUPPORT

---

HOMEKANE provides a one-year warranty for this product from the date of purchase. This warranty covers manufacturing defects and issues arising from normal use.

If you have any questions about the product, require technical assistance, or need to claim warranty service, please contact HOMEKANE customer support through your retailer or the official HOMEKANE website. Please have your model number (B0C2TYW9J1) and proof of purchase ready when contacting support.