Manuals+

Q & A | Deep Search | Upload

manuals.plus /

- > BESTISAN /
- > BESTISAN Sound Bars for TV, Wired and Wireless Bluetooth 5.0 TV Sound bar 34inches Soundbar for Home Theater HDMI-ARC/Optical/Coaxial/AUX/USB/Bluetooth Connection, Wall Mountable

BESTISAN SE04P

BESTISAN Sound Bar SE04P User Manual

Model: SE04P

1. Introduction

Thank you for purchasing the BESTISAN Sound Bar SE04P. This sound bar is designed to enhance your home entertainment experience by delivering high-fidelity audio for your television. Featuring multiple connectivity options including HDMI-ARC, Optical, Coaxial, AUX, USB, and Bluetooth 5.0, it offers versatile integration with various devices. Its slim and sleek design ensures it complements any living space while providing powerful, immersive sound.

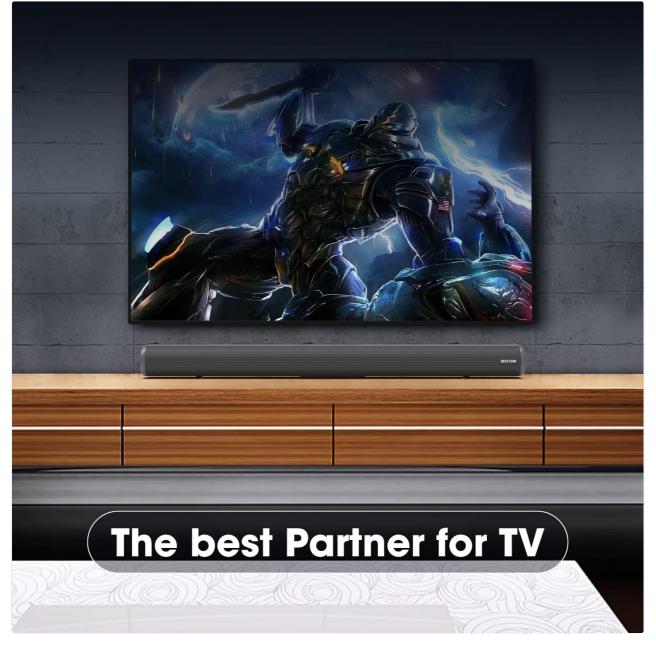


Figure 1.1: The BESTISAN Sound Bar SE04P, designed as an ideal companion for your television, enhancing audio output for an improved viewing experience.

2. SAFETY INFORMATION

Please read all safety instructions carefully before using this product. Keep this manual for future reference.

- **Power Source:** Use only the provided power adapter. Ensure the voltage matches the requirements specified on the adapter.
- **Ventilation:** Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Water and Moisture: Do not expose this appliance to dripping or splashing. Do not place objects filled with liquids, such as vases, on the apparatus.
- **Heat:** Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Cleaning: Clean only with a dry cloth. Unplug the sound bar from the power outlet before cleaning.

- **Servicing:** Do not attempt to service this product yourself. Refer all servicing to qualified service personnel.
- **Placement:** Place the sound bar on a stable, flat surface or mount it securely to a wall using the provided brackets.

3. PACKAGE CONTENTS

Carefully unpack the box and ensure all the following items are included:



Figure 3.1: Contents of the BESTISAN Sound Bar SE04P package.

- BESTISAN Sound Bar SE04P
- · Power Adapter
- Remote Control
- · Quick Start Guide

- Digital Optical Cable
- Stereo 3.5mm to 3.5mm Audio Cable
- Mount Screws and Wall Mount Brackets

4. PRODUCT OVERVIEW

4.1 Sound Bar Components

The BESTISAN Sound Bar SE04P features a sleek design with integrated speakers and control elements.



Figure 4.1: Front view of the Sound Bar, showcasing its high-quality aesthetic.

Internally, the sound bar is equipped with 4 full-frequency speakers and twin bass reflex tubes, designed to deliver an immersive audio experience.



Figure 4.2: Internal speaker configuration of the Sound Bar.

4.2 Control Panel and Remote Control

The sound bar can be controlled via the buttons located on the unit or through the included remote control. An LED indicator on the sound bar displays the currently selected mode.



Figure 4.3: Sound Bar and Remote Control.

The remote control provides comprehensive control over power, volume, input selection, and sound modes.

4.3 Input/Output Ports

The rear panel of the sound bar features various ports for wired connections:



Figure 4.4: Multiple Connection Ports on the Sound Bar.

- **HD-ARC:** HDMI Audio Return Channel for high-quality digital audio from compatible TVs.
- COAX: Coaxial digital audio input.
- OPTICAL: Optical digital audio input.
- AUX: 3.5mm auxiliary input for analog audio devices.
- USB: USB port for audio playback from compatible storage devices.
- DC: Power input for the provided power adapter.

5. SETUP

5.1 Placement

The sound bar can be placed on a flat surface in front of your TV or mounted on the wall. For optimal sound,

ensure the sound bar is positioned centrally below your television.

- Tabletop Placement: Place the sound bar on a stable, level surface directly in front of your TV.
- Wall Mounting: Use the included wall mount brackets and screws to securely attach the sound bar to a wall. Refer to the Quick Start Guide for detailed wall mounting instructions.

5.2 Power Connection

- 1. Connect the provided power adapter to the DC input port on the back of the sound bar.
- 2. Plug the other end of the power adapter into a wall outlet.
- 3. The sound bar will enter standby mode, indicated by the LED indicator.

6. OPERATING INSTRUCTIONS

6.1 Wired Connections

Connect the sound bar to your TV or other audio sources using one of the following wired options:

- HDMI-ARC Connection: Connect an HDMI cable (not included) from the HDMI-ARC port on your TV to the HD-ARC port on the sound bar. This allows audio from your TV to be sent to the sound bar and enables control of the sound bar volume using your TV remote (if supported by your TV).
- **Optical Connection:** Connect the included Digital Optical Cable from the Optical Out port on your TV to the OPTICAL port on the sound bar. Ensure your TV's audio output is set to PCM or Stereo.
- Coaxial Connection: Connect a Coaxial cable (not included) from the Coaxial Out port on your TV to the COAX port on the sound bar.
- AUX Connection: Connect the included 3.5mm audio cable from the headphone jack or AUX Out port of your device (e.g., TV, smartphone) to the AUX port on the sound bar.
- **USB Connection:** Insert a USB flash drive (FAT32 format, max 32GB) into the USB port for direct audio playback of supported formats.

6.2 Bluetooth Pairing

The sound bar supports Bluetooth 5.0 for wireless audio streaming from compatible devices.

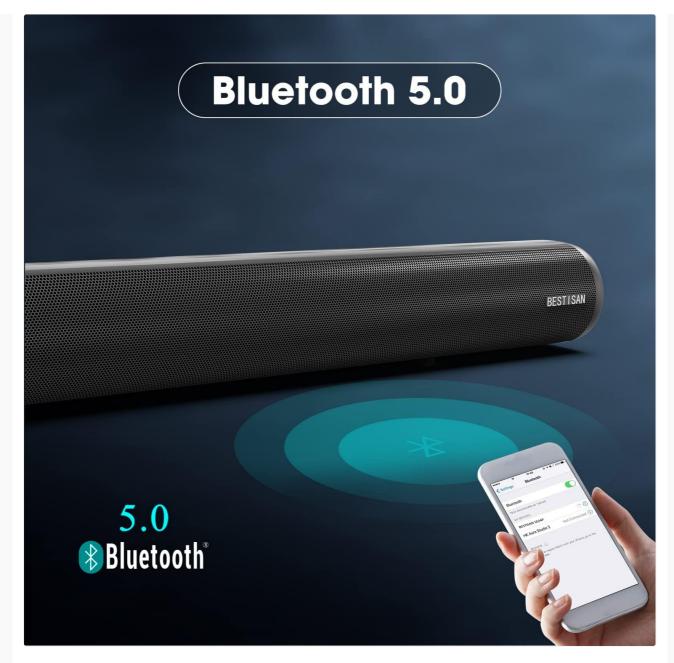


Figure 6.1: Bluetooth 5.0 Connectivity.

- 1. Press the "Bluetooth" button on the remote control or the "Mode" button on the sound bar until the LED indicator shows Bluetooth mode. The sound bar will enter pairing mode.
- 2. Enable Bluetooth on your device (e.g., smartphone, tablet) and search for "BESTISAN SE04P" in the list of available devices.
- 3. Select "BESTISAN SE04P" to connect. Once paired, the LED indicator will stop flashing and remain solid.
- 4. You can now play audio from your device through the sound bar.

Note: The Bluetooth range is approximately 32.8 feet (10 meters) in an open area.

6.3 Sound Modes (Equalizer Settings)

The sound bar offers three distinct equalizer modes to optimize audio for different content types:

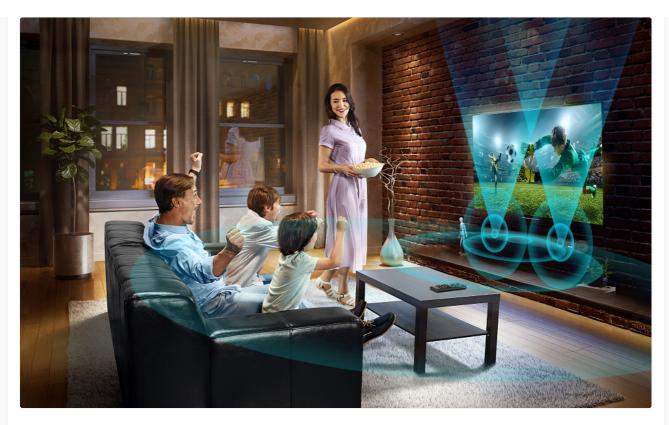


Figure 6.2: Available Sound Modes.

- Movie Mode: Enhances dialogue clarity and provides a wider soundstage for cinematic experiences.
- Music Mode: Optimizes audio for music playback, emphasizing balanced tones and rich bass.
- News Mode: Focuses on vocal clarity, making spoken content easier to understand.

Press the corresponding mode button on the remote control to switch between these settings.

7. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your sound bar.

- **Cleaning:** Use a soft, dry, lint-free cloth to clean the surface of the sound bar. Do not use liquid cleaners, aerosols, or abrasive cleaning agents.
- Dust: Regularly dust the speaker grilles to prevent accumulation that could affect sound quality.
- **Storage:** If storing the sound bar for an extended period, disconnect it from power and store it in a cool, dry place, preferably in its original packaging.
- **Avoid Extreme Conditions:** Do not expose the sound bar to extreme temperatures, humidity, or direct sunlight.

8. TROUBLESHOOTING

If you encounter issues with your BESTISAN Sound Bar SE04P, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No power	Power cable not connected; Power outlet not active.	Ensure the power adapter is securely connected to the sound bar and a working wall outlet. Try a different outlet.
No sound	Incorrect input selected; Volume too low; Mute function active; Incorrect TV audio settings.	Press the "Mode" button on the remote or sound bar to select the correct input source (e.g., HDMI-ARC, Optical, Bluetooth). Increase the volume on both the sound bar and your TV/device. Ensure the sound bar is not muted. For Optical/Coaxial connections, set your TV's audio output to PCM or Stereo.
Poor sound quality	Incorrect sound mode; Poor connection; Source audio quality.	Try switching between Movie, Music, and News sound modes to find the best setting. Ensure all cables are securely connected. Try a different cable if possible. Check the audio quality of the source device.
Remote control not working	Batteries depleted; Obstruction between remote and sound bar; Remote not pointed correctly.	Replace the batteries in the remote control. Ensure there are no obstructions between the remote and the sound bar's sensor. Point the remote directly at the sound bar.
Bluetooth pairing issues	Sound bar not in pairing mode; Device too far; Interference.	Ensure the sound bar is in Bluetooth pairing mode (LED flashing). Move your Bluetooth device closer to the sound bar. Turn off other Bluetooth devices nearby to reduce interference. Forget "BESTISAN SE04P" from your device's Bluetooth list and try pairing again.

9. SPECIFICATIONS

Feature	Specification
Model Name	SE04P
Speaker Type	Soundbar
Mounting Type	Wall Mount
Product Dimensions (D x W x H)	5.5" x 5.5" x 34"
Speaker Maximum Output Power	80 Watts

Feature	Specification
Frequency Response	9000 Hz
Connectivity Technology	Auxiliary, Coaxial, HDMI-ARC, Optical, USB, Bluetooth
Wireless Communication Technology	Bluetooth 5.0
Bluetooth Range	32.8 Feet (10 meters)
Audio Output Mode	Stereo
Control Method	Remote Control, On-unit Buttons
Item Weight	5.79 pounds

10. WARRANTY AND SUPPORT

The BESTISAN Sound Bar SE04P comes with a **Limited Warranty**. For specific details regarding warranty coverage, duration, and terms, please refer to the warranty information provided in the Quick Start Guide or contact BESTISAN customer support directly.

For technical assistance, troubleshooting beyond this manual, or warranty claims, please contact BESTISAN customer support through their official website or the contact information provided with your product documentation.

© 2024 BESTISAN. All rights reserved.

Related Documents - SE04P

