



[Manuals.plus](#) /

› [SENCKIT](#) /

› SENCKIT S1 Bluetooth Tracker Instruction Manual

SENCKIT S1

SENCKIT S1 Bluetooth Tracker Instruction Manual

Model: S1

INTRODUCTION

The SENCKIT S1 Bluetooth Tracker is designed to help you locate your valuable items quickly and efficiently. Utilizing Apple's Find My network, this smart tracker allows you to pinpoint the location of your keys, bags, wallets, pets, and other belongings directly from your iOS device. This manual provides detailed instructions for setting up, operating, and maintaining your SENCKIT S1 tracker.



Image: SENCKIT S1 Bluetooth Tracker, a white square device with a keychain, next to an iPhone displaying its location on a map.

SAFETY INFORMATION

Warning: Not suitable for children under 36 months.

Please keep the device and its small parts, especially the battery, out of reach of young children to prevent choking hazards.

PACKAGE CONTENTS

Verify that all items are present in your package:

- 1 x SENCKIT S1 Bluetooth Tracker
- 1 x Instruction Manual (this document)

SETUP

1. Battery Installation

The SENCKIT S1 tracker uses a replaceable CR2032 button cell battery. The battery is pre-installed, but you may need to remove a protective strip before first use.

1. Locate the small groove on the side of the tracker.

2. Carefully pry open the tracker casing using a thin, non-metallic tool or your fingernail.
3. If present, remove the plastic protective strip from the battery compartment.
4. Ensure the CR2032 battery is correctly seated with the positive (+) side facing up.
5. Close the tracker casing firmly until it clicks into place.

Product Size



Model: iTag

Product Size: 38*38*7mm

Product Weight: 8.7g

Battery: CR2032 Replaceable

Buzzer: 90Db≤

Standby: Up to 1 year

Wireless Range: 10–20M(Indoor) 20–30(Out door)

Supports: To use the Apple Find My app to locate your Item Locator, the latest version of iOS, iPadOS, or macOS is recommended.

Image: The SENCKIT S1 tracker with its back cover removed, revealing the internal circuit board and a CR2032 battery. This illustrates the battery installation process.

2. Pairing with Apple Find My App

The SENCKIT S1 tracker is designed to work exclusively with Apple's Find My network. Ensure your iOS device is running the latest version of iOS.

1. Open the pre-installed **Find My** app on your iPhone or iPad.

2. Tap the **Items** tab at the bottom of the screen.
3. Tap **+ Add Item**, then select **Other Supported Item**.
4. Place your SENCKIT S1 tracker near your iOS device. The app will detect the tracker.
5. Tap **Connect** when prompted.
6. Follow the on-screen instructions to name your item and link it to your Apple ID.
7. Tap **Agree** to the privacy statement and then **Finish**. Your tracker is now paired.



Image: A sequence of three iPhone screens demonstrating the initial steps to pair the SENCKIT S1 tracker with the Apple Find My app, from opening the app to selecting "Other Supported Item."

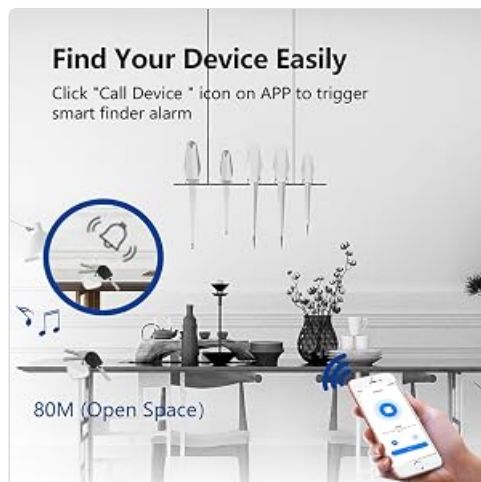


Image: A sequence of three iPhone screens illustrating the completion of the pairing process, including tapping "Connect," linking to an Apple ID, and finalizing the setup.

OPERATING INSTRUCTIONS

1. Locating Nearby Items

When your SENCKIT S1 tracker is within Bluetooth range of your iOS device, you can make it play a sound to help you find it.


1. Open the **Find My** app.
2. Go to the **Items** tab and select your SENCKIT S1 tracker.
3. Tap **Play Sound**. The tracker will emit a loud ring (up to 90dB) to guide you to its location.
4. Tap **Stop Sound** once you have found your item.



4. Tap "Connect"



5. Link to your Apple ID

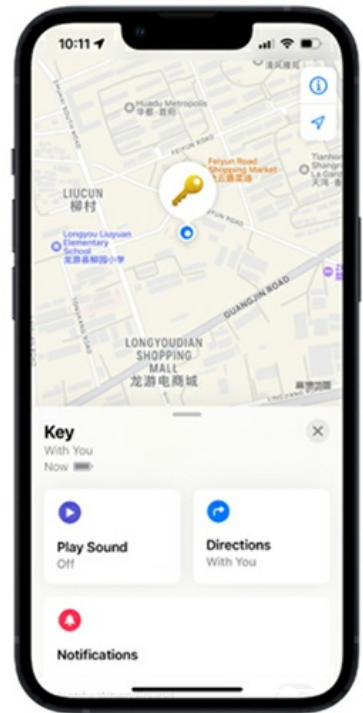

6. Finish

Image: An iPhone screen displaying the "Play Sound" function within the Find My app, indicating the tracker's proximity and the ability to trigger an audible alert. A SENCKIT tracker with keys is shown next to the phone.

2. Locating Far Away Items

If your item is out of Bluetooth range, the Apple Find My network can help you locate it. Hundreds of millions of Apple devices anonymously and securely relay the location of your tracker to you.

1. Open the **Find My** app.
2. Go to the **Items** tab and select your SENCKIT S1 tracker.
3. The app will display the tracker's last known location on a map.
4. Tap **Directions** to get navigation to the tracker's location.



GPS BT Tracking Not Afraid Of Losing Items

When you can't find it,
open the APP and enter the map to view the location



Image: An iPhone screen displaying the Find My app with a map showing the current location of the SENCKIT S1 tracker, indicating its use for remote tracking.

3. Left-Behind Alerts

Receive notifications if you leave your item behind and it goes out of range of your iOS device.

1. In the **Find My** app, select your SENCKIT S1 tracker.
2. Scroll down and enable the **Notify When Left Behind** toggle.
3. You can also set specific locations where you do not want to be notified (e.g., your home).

4. Lost Mode

If your SENCKIT S1 tracker is truly lost, you can enable Lost Mode to help others return it to you.

1. In the **Find My** app, select your SENCKIT S1 tracker.
2. Scroll down and tap **Enable** under **Lost Mode**.
3. Follow the prompts to enter a contact phone number or email address.

4. If someone finds your tracker and scans it with an NFC-enabled smartphone, they will see your contact information.

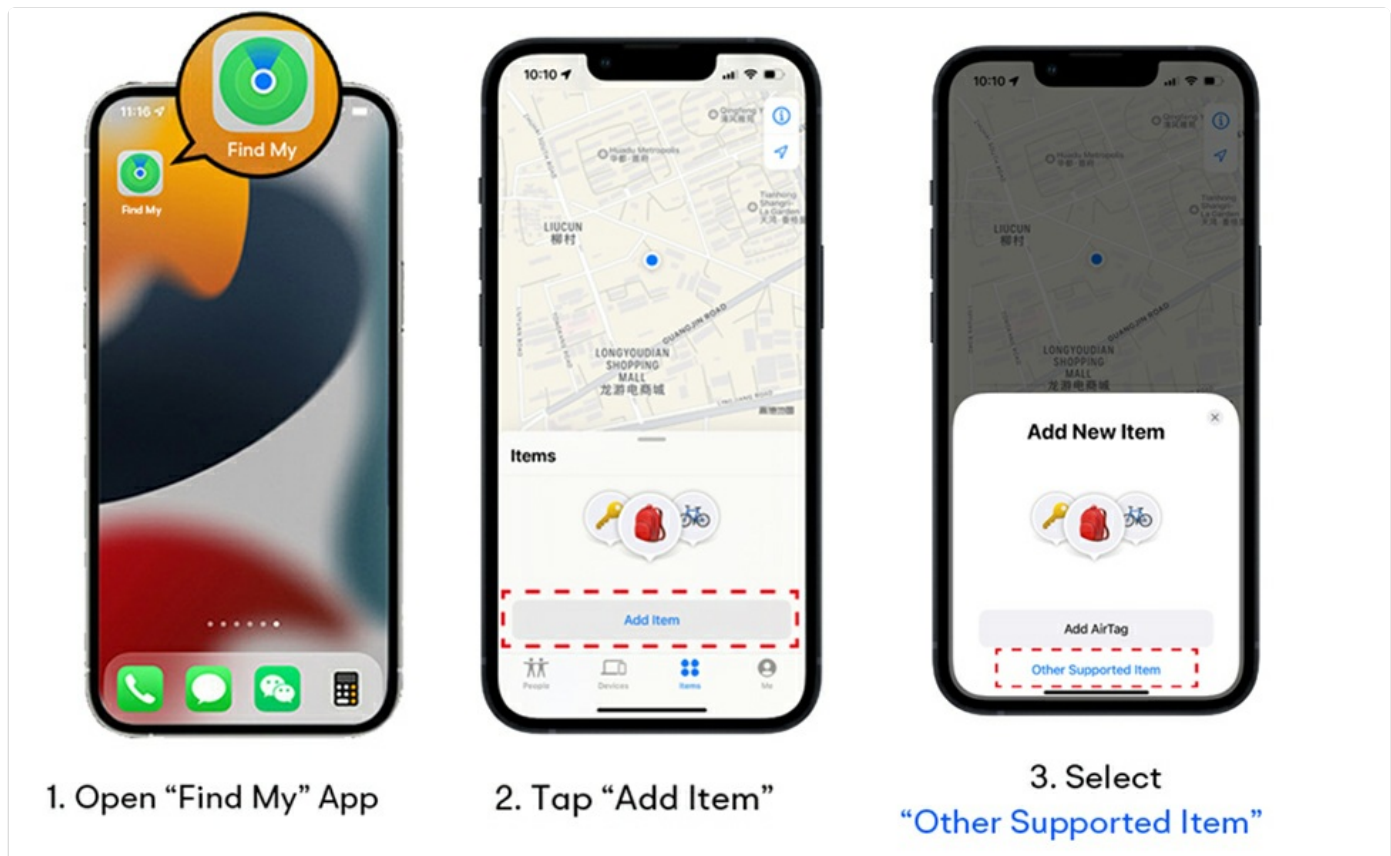


Image: An iPhone screen displaying the "Lost Mode" feature within the Find My app, showing how a contact number can be displayed to someone who finds the tracker.

MAINTENANCE

1. Battery Replacement

The SENCKIT S1 tracker has a battery life of up to 1 year. The Find My app will notify you when the battery is low. Replace the CR2032 battery following these steps:

1. Locate the small groove on the side of the tracker.
2. Carefully pry open the tracker casing.
3. Remove the old CR2032 battery.
4. Insert a new CR2032 battery with the positive (+) side facing up.
5. Close the tracker casing firmly until it clicks into place.





Image: A graphic illustrating the SENCKIT S1 tracker's replaceable battery feature, highlighting its long-term use with a 365-day battery life.

2. Cleaning

To clean your SENCKIT S1 tracker, wipe it with a soft, dry, or slightly damp cloth. Avoid using harsh chemicals or abrasive materials, as these can damage the device.

TROUBLESHOOTING

- **Tracker not pairing:**
 - Ensure the battery is correctly installed and has sufficient charge.
 - Make sure your iOS device's Bluetooth is enabled.
 - Bring the tracker very close to your iOS device during pairing.
 - Restart your iOS device and try pairing again.
- **Tracker not playing sound:**
 - Check the battery level in the Find My app. Replace the battery if low.
 - Ensure the tracker is within Bluetooth range of your iOS device.
- **Inaccurate location:**
 - Location accuracy depends on the density of Apple devices in the Find My network. In remote areas, updates may be less frequent.
 - Ensure your iOS device has a stable internet connection for map updates.

SPECIFICATIONS

Model	S1
Dimensions	1.5"L x 1.5"W x 0.28"Th (38mm x 38mm x 7mm)
Weight	0.88 ounces (8.7g)
Battery Type	CR2032 (Replaceable)
Battery Life	Up to 1 year
Connectivity	Bluetooth
Wireless Range	10-20M (Indoor), 20-30M (Outdoor)
Buzzer Volume	Up to 90dB
Water Resistance	IP65
Compatibility	Apple Find My (iOS Compatible)

Wearable

Wearable on kids/pets/items



Image: A detailed diagram illustrating the physical dimensions and key specifications of the SENCKIT S1 Bluetooth Tracker.

USAGE SCENARIOS

The SENCKIT S1 Bluetooth Tracker is versatile and can be attached to various items:

- **Keys:** Attach to your keyring to easily find misplaced keys.
- **Bags & Backpacks:** Secure to your luggage, handbag, or backpack for travel or daily use.
- **Wallets:** Slip into your wallet to prevent loss.
- **Pets:** Attach to your pet's collar to help locate them if they wander off.

Power Display

Check the power at any time,
detachable and install the battery

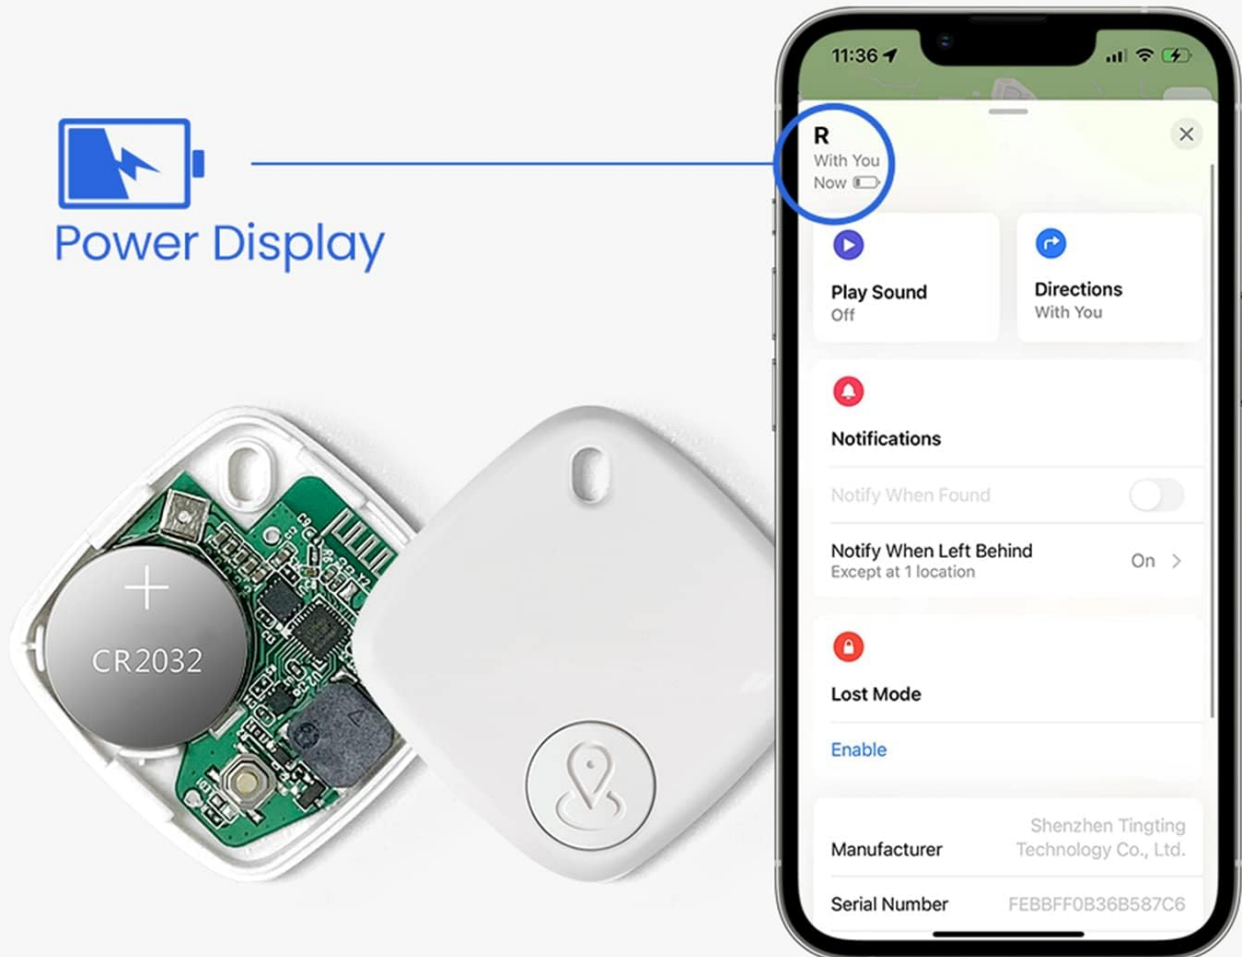


Image: A collage demonstrating various applications of the SENCKIT S1 tracker, including attachment to a pet's collar, a bag, and luggage.

© 2023 SENCKIT. All rights reserved.

For further assistance, please refer to the official SENCKIT website or contact customer support.