

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [GRSICO](#) /

› [GRSICO Home Alarm System 5-Piece Kit \(Model W307D\) User Manual](#)

## GRSICO W307D

# GRSICO Home Alarm System 5-Piece Kit (Model W307D) User Manual

Wireless Home Security System with Door/Window Sensors

## INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your GRSICO Home Alarm System 5-Piece Kit. This wireless security system is designed to enhance the safety of your home, apartment, office, or garage by monitoring doors and windows. It features instant app alerts and easy DIY installation, operating on 2.4 GHz Wi-Fi networks.

## IMPORTANT SAFETY INFORMATION

Please read all instructions carefully before using the device. Keep this manual for future reference.

- Ensure the device is installed in a dry environment, away from water and excessive humidity.
- Do not attempt to disassemble or repair the device yourself. Refer to qualified service personnel.
- Use only the specified power source for the Wi-Fi Gateway.
- Keep out of reach of children.
- This system operates on a 2.4 GHz Wi-Fi network only. It does not support 5G Wi-Fi.

## PACKAGE CONTENTS

Your GRSICO Home Alarm System 5-Piece Kit includes the following components:

- 1x Wi-Fi Gateway
- 4x Door/Window Sensors
- User Manual
- Mounting accessories (e.g., 3M adhesive pads)



Image: Overview of the GRSICO Home Alarm System 5-Piece Kit, showing the Wi-Fi Gateway and four door/window sensors.

## SETUP GUIDE

### 1. Download the AGSHOME App

Scan the QR code in the included user manual or search for "AGSHOME" in your smartphone's app store (Google Play Store or Apple App Store) to download and install the application. Register for an account if you are a new user, or log in with your existing credentials.

### 2. Power On the Wi-Fi Gateway

Plug the Wi-Fi Gateway into a standard USB power adapter (not included) or a USB port. Ensure it is within range of your 2.4 GHz Wi-Fi network. The indicator light on the gateway will flash, indicating it is ready for pairing.

Your browser does not support the video tag.

Video: Quick Setup Guide for the GRSICO Home Alarm System, demonstrating the initial power-on and app connection steps.

### 3. Add the Wi-Fi Gateway to the App

1. Open the AGSHOME App.
2. Tap the "+" icon in the top right corner or select "Add Device".
3. Follow the on-screen prompts to add the Wi-Fi Gateway. Ensure your phone's Bluetooth is enabled for easier discovery.
4. Select your 2.4 GHz Wi-Fi network and enter the password when prompted.
5. Wait for the app to successfully add the device. The gateway's indicator light will turn solid once connected.

## Control it All From Your Mobile App

Arm and disarm remotely with AGSHOME app anytime

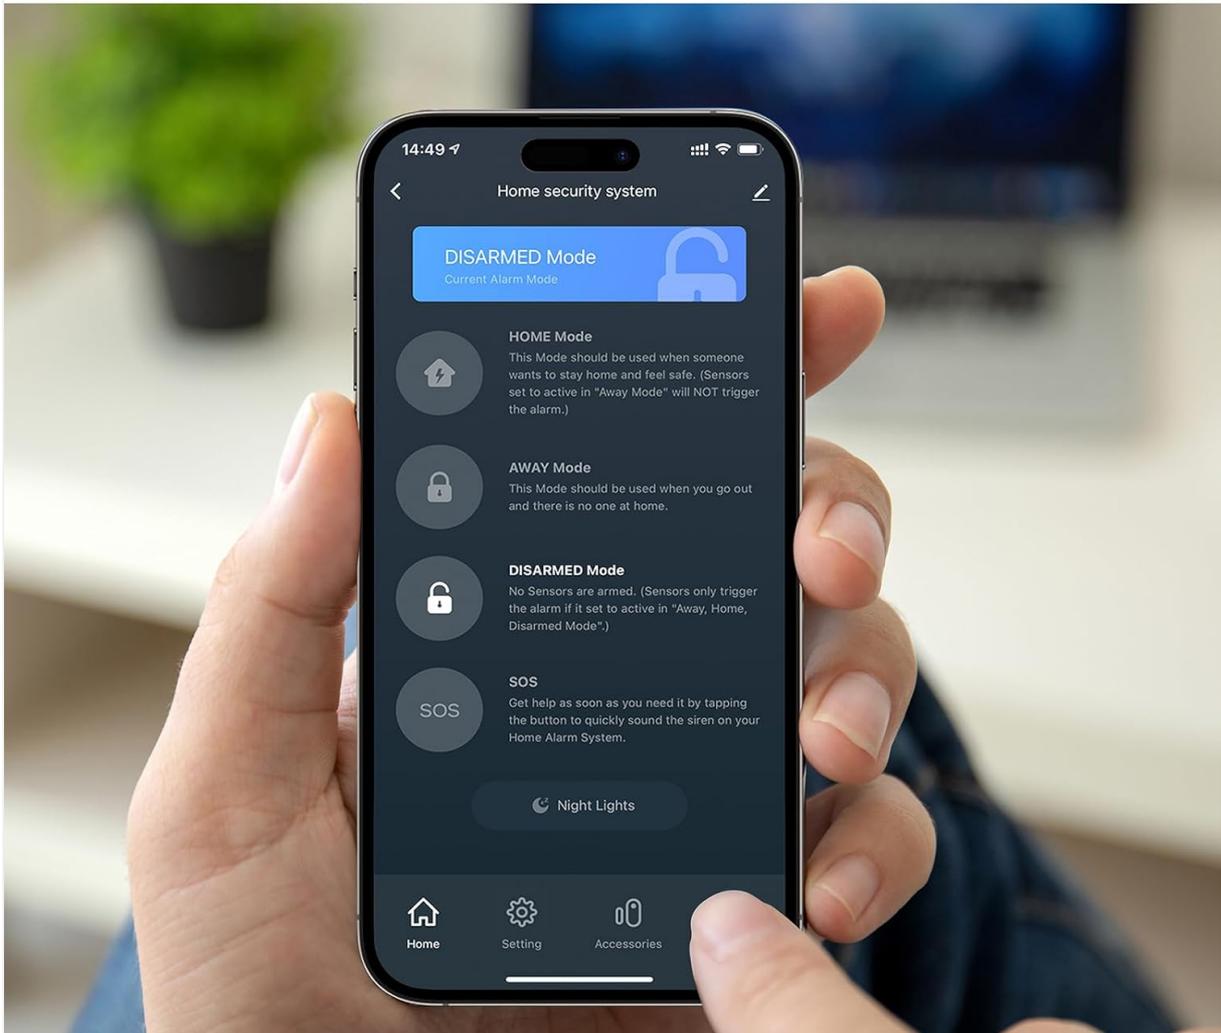


Image: Screenshot of the AGSHOME App interface, illustrating the process of adding a new device to the system.

### 4. Install Door/Window Sensors

The door/window sensors are pre-paired with the Wi-Fi Gateway at the factory and are ready for immediate use. No additional pairing steps are required for the included sensors.

- Identify the two parts of each sensor: the main sensor unit and the magnetic strip.
- Clean the surface where you intend to install the sensors (door/window frame and the moving part of the door/window).
- Attach the main sensor unit to the fixed part of the door/window frame using the provided 3M adhesive pads.
- Attach the magnetic strip to the moving part of the door/window, aligning it with the main sensor unit. The gap between the two parts should be no more than 0.75 inches (approximately 1.9 cm) when the door/window is closed.

- Ensure the sensors are securely attached and do not interfere with the opening and closing of the door or window.

## Easy DIY Installation

No screws, drilling or tools required.



Image: A person demonstrating the easy DIY installation of a door/window sensor using adhesive pads.

## Real-Time Notifications

Get app alerts when door/window opens

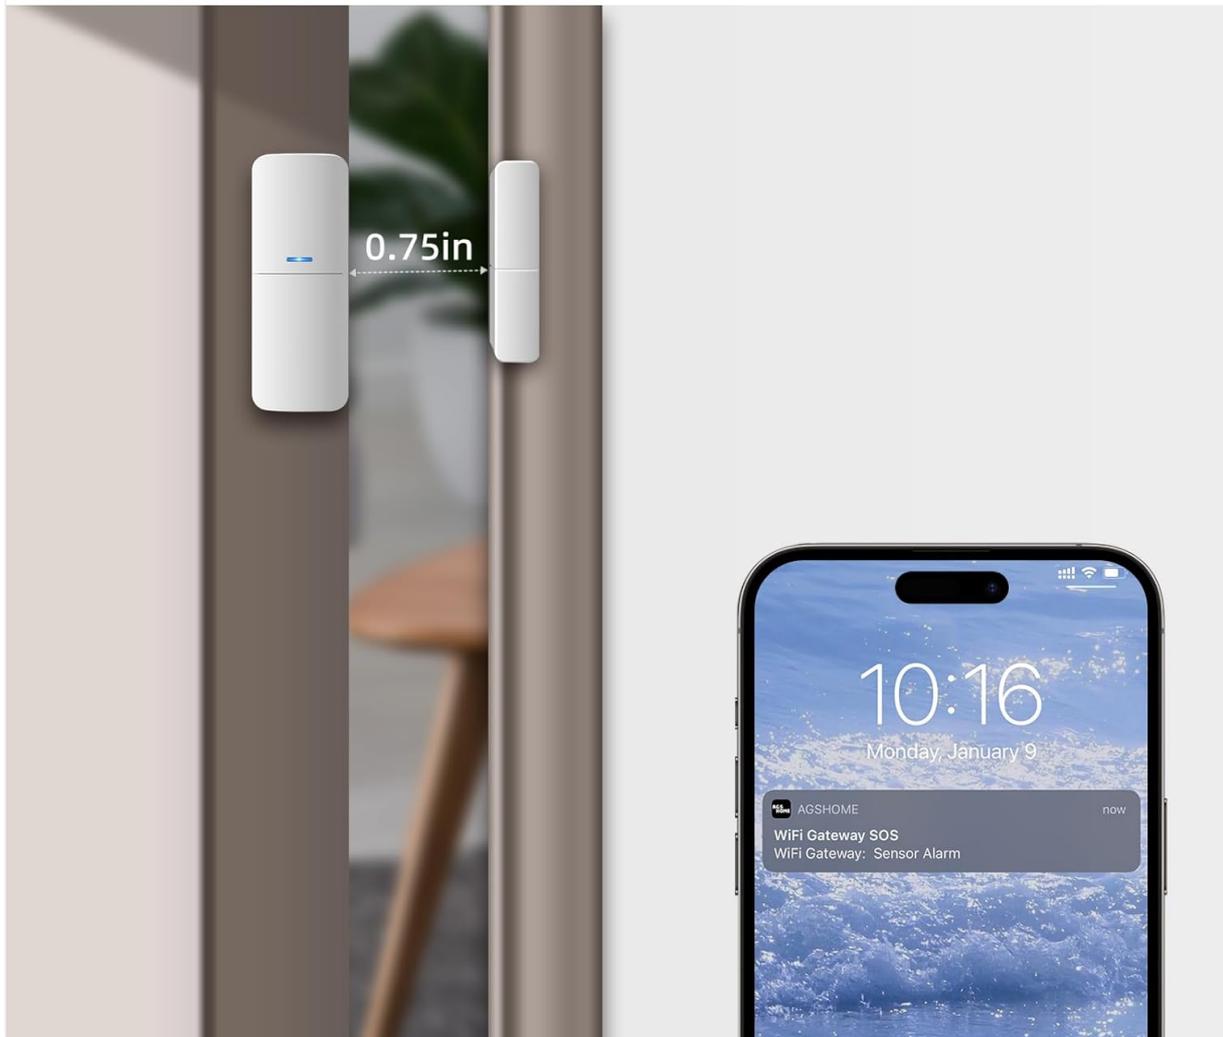


Image: A close-up of a door/window sensor installed, showing the recommended 0.75-inch gap between the two parts.

## OPERATING YOUR ALARM SYSTEM

### Arming and Disarming

Control your alarm system remotely using the AGSHOME App. The app provides different modes to suit your security needs:

- **HOME Mode:** Use this mode when you are at home. Sensors set to active in "Home Mode" will trigger the alarm.
- **AWAY Mode:** Activate this mode when you leave your home. All active sensors will trigger the alarm if breached.
- **DISARMED Mode:** No sensors are armed. Sensors will only trigger the alarm if they are specifically set to active in "Away, Home, Disarmed Mode".
- **SOS:** Tap the SOS button in the app to quickly sound the siren on your Home Alarm System in case of an emergency.

# GRSICO

## Home Security System



Image: The AGSHOME App interface displaying various alarm modes such as Disarmed, Home, Away, and SOS.

### Instant App Alerts

When a sensor is triggered, the system will immediately send a real-time notification to your smartphone via the AGSHOME App. This allows you to monitor your home's security status from anywhere.

## Child Care

Use your door sensors to be alerted to children leaving their room or attempting to leave the home. Great for sleepwalking children!



Image: A smartphone screen showing a real-time notification from the AGSHOME App, indicating a sensor alarm.

### Silent Alarm Feature

The GRSICO Home Alarm System is designed to provide silent alerts. When a sensor is triggered, you will receive an alert on your phone app, but the gateway and door/window sensors themselves will not emit an audible alarm. This prevents false alarms from disturbing your sleep or alerting intruders.



## No Alarm Sound

The gateway and contact sensor won't make any annoying noise, and there will be no false alarm sound to disturb your sleep at night.

Image: The Wi-Fi Gateway plugged into an outlet, illustrating its silent operation without an audible alarm.

### Smart Home Compatibility

The system is compatible with smart home platforms like Alexa and Google Home, allowing for voice control and integration into your existing smart home ecosystem.

## MAINTENANCE

### Battery Replacement for Sensors

The door/window sensors are powered by alkaline batteries. When the battery level is low, the app will notify you. To replace a sensor battery:

1. Gently push the shell of the sensor to open it.
2. Remove the old battery.
3. Insert a new AA alkaline battery, ensuring correct polarity.
4. Close the sensor shell securely.

## Easy to Replace Battery

Gently push the shell of sensor to remove and replace the battery

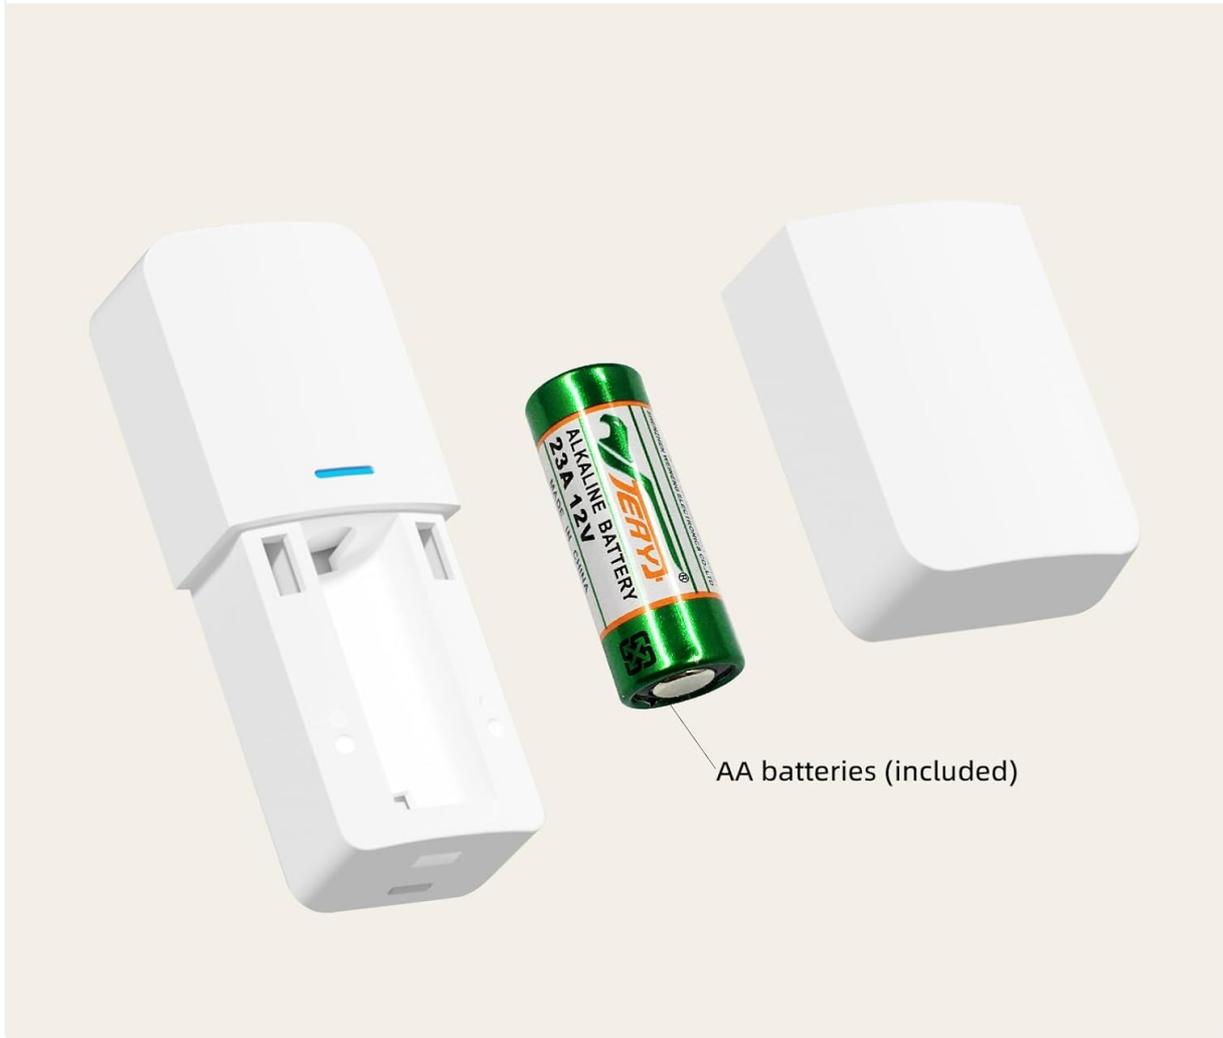


Image: A diagram illustrating the steps to open a sensor and replace its AA battery.

## TROUBLESHOOTING

- **Gateway not connecting to Wi-Fi:** Ensure your Wi-Fi network is 2.4 GHz. The system does not support 5G Wi-Fi. Check your Wi-Fi password and ensure the gateway is within range of your router. Restart the gateway and try pairing again.
- **Sensors not triggering alerts:** Verify that the sensors are installed correctly with the magnetic strip aligned with the main unit and the gap is within 0.75 inches. Check the battery level of the sensors in the app. Ensure the system is in an armed mode (Home or Away) for alerts to be active.
- **App notifications not received:** Check your smartphone's notification settings for the AGSHOME App to ensure notifications are enabled. Verify your phone has an active internet connection.
- **System not responding:** Try restarting the Wi-Fi Gateway by unplugging it and plugging it back in. If issues persist, consider resetting the gateway (refer to the app for specific reset instructions) and re-adding it.

## SPECIFICATIONS

Brand	GRSICO
-------	--------

<b>Model Number</b>	W307D
<b>Power Source</b>	Corded Electric (for Gateway)
<b>Connectivity Technology</b>	Wireless (2.4 GHz Wi-Fi Only)
<b>Compatible Devices</b>	Smartphone (via AGSHOME App)
<b>Installation Type</b>	Wireless DIY
<b>Alert Type</b>	App Notification
<b>Recommended Uses</b>	Indoor
<b>Included Components</b>	1x Wi-Fi Gateway, 4x Door/Window Sensors
<b>Battery Cell Composition</b>	Alkaline (for Sensors)

## **WARRANTY AND SUPPORT**

---

This product comes with a manufacturer's warranty for 90 days from the date of purchase. For technical support, troubleshooting assistance, or warranty claims, please contact GRSICO customer service through the AGSHOME App or refer to the contact information provided in the original product packaging.