Rii K06

Rii K06 Mini Bluetooth Keyboard User Manual

Model: K06

1. Product Overview

The Rii K06 Mini Bluetooth Keyboard is a compact, portable, and versatile input device designed for a seamless user experience across various platforms. It features a full QWERTY keyboard, a responsive touchpad, and convenient backlight functionality for use in low-light conditions. Additionally, it includes an IR learning function, allowing it to control other devices.



Image: Front view of the Rii K06 Mini Bluetooth Keyboard, showcasing its QWERTY layout and integrated touchpad.

Key Features:

- **Bluetooth Compatibility:** Offers fast connection speed and unwavering stability for a seamless typing experience.
- **Multi-device Support:** Compatible with Windows, Mac, Chrome OS, Android, iPad, iPhone, and Apple TV (any Bluetooth-enabled devices supporting external keyboards with HID profile).
- **Compact & Portable Design:** Innovative QWERTY keyboard with touchpad, providing comfort and wireless connectivity.
- **Backlit Design:** Keys are backlit for easy use in dark environments.
- **Built-in Rechargeable Battery:** Features a Li-ion rechargeable battery with auto sleep and wake-up functions for extended working time.

- **IR Learning Function:** Allows the keyboard to learn and control infrared-enabled devices.



Image: Diagram highlighting the key features of the Rii K06 Mini Bluetooth Keyboard: Backlight, Bluetooth Mode, IR Learning, and Touchpad.

2. Package Contents

- 1 x Rii K06 Mini Bluetooth Keyboard
- 1 x USB Charging Cable
- 1 x User Manual (this document)

3. Getting Started

3.1 Charging the Keyboard

Before first use, fully charge the keyboard. Connect the provided USB charging cable to the keyboard's charging port and the other end to a USB power source (e.g., computer USB port, USB wall adapter). The charging indicator light will

illuminate during charging and turn off when fully charged.

3.2 Bluetooth Pairing

The Rii K06 keyboard connects via Bluetooth. Follow these steps to pair it with your device:

1. Long press the **FN + Shift** keys simultaneously for one second.
2. Wait for the blue light to flash, indicating the keyboard is in pairing mode.
3. On your device (e.g., computer, tablet, smartphone), go to the Bluetooth settings.
4. Search for new Bluetooth devices.
5. Select "**K06 BLE KEYBOARD**" from the list of available devices to complete the pairing process.



Image: Visual guide for Bluetooth pairing, showing the keyboard and steps to connect.

4. Operating Instructions

4.1 Keyboard and Touchpad Usage

The keyboard features a standard QWERTY layout. The integrated touchpad allows for precise cursor navigation. You can navigate the cursor easily with your thumb without needing an external mouse. It is excellent for browsing, searching, or streaming on smart TVs and other compatible devices.



Image: A user holding the Rii K06 Mini Bluetooth Keyboard, demonstrating its use with a television in the background.

4.2 Backlight Control

The keyboard features a backlit mode for improved visibility in dark environments. Refer to the keyboard's function keys for backlight activation and adjustment. Typically, this is controlled by pressing the **Fn** key in combination with a specific function key (e.g., **Fn + F2** for backlight toggle/brightness).

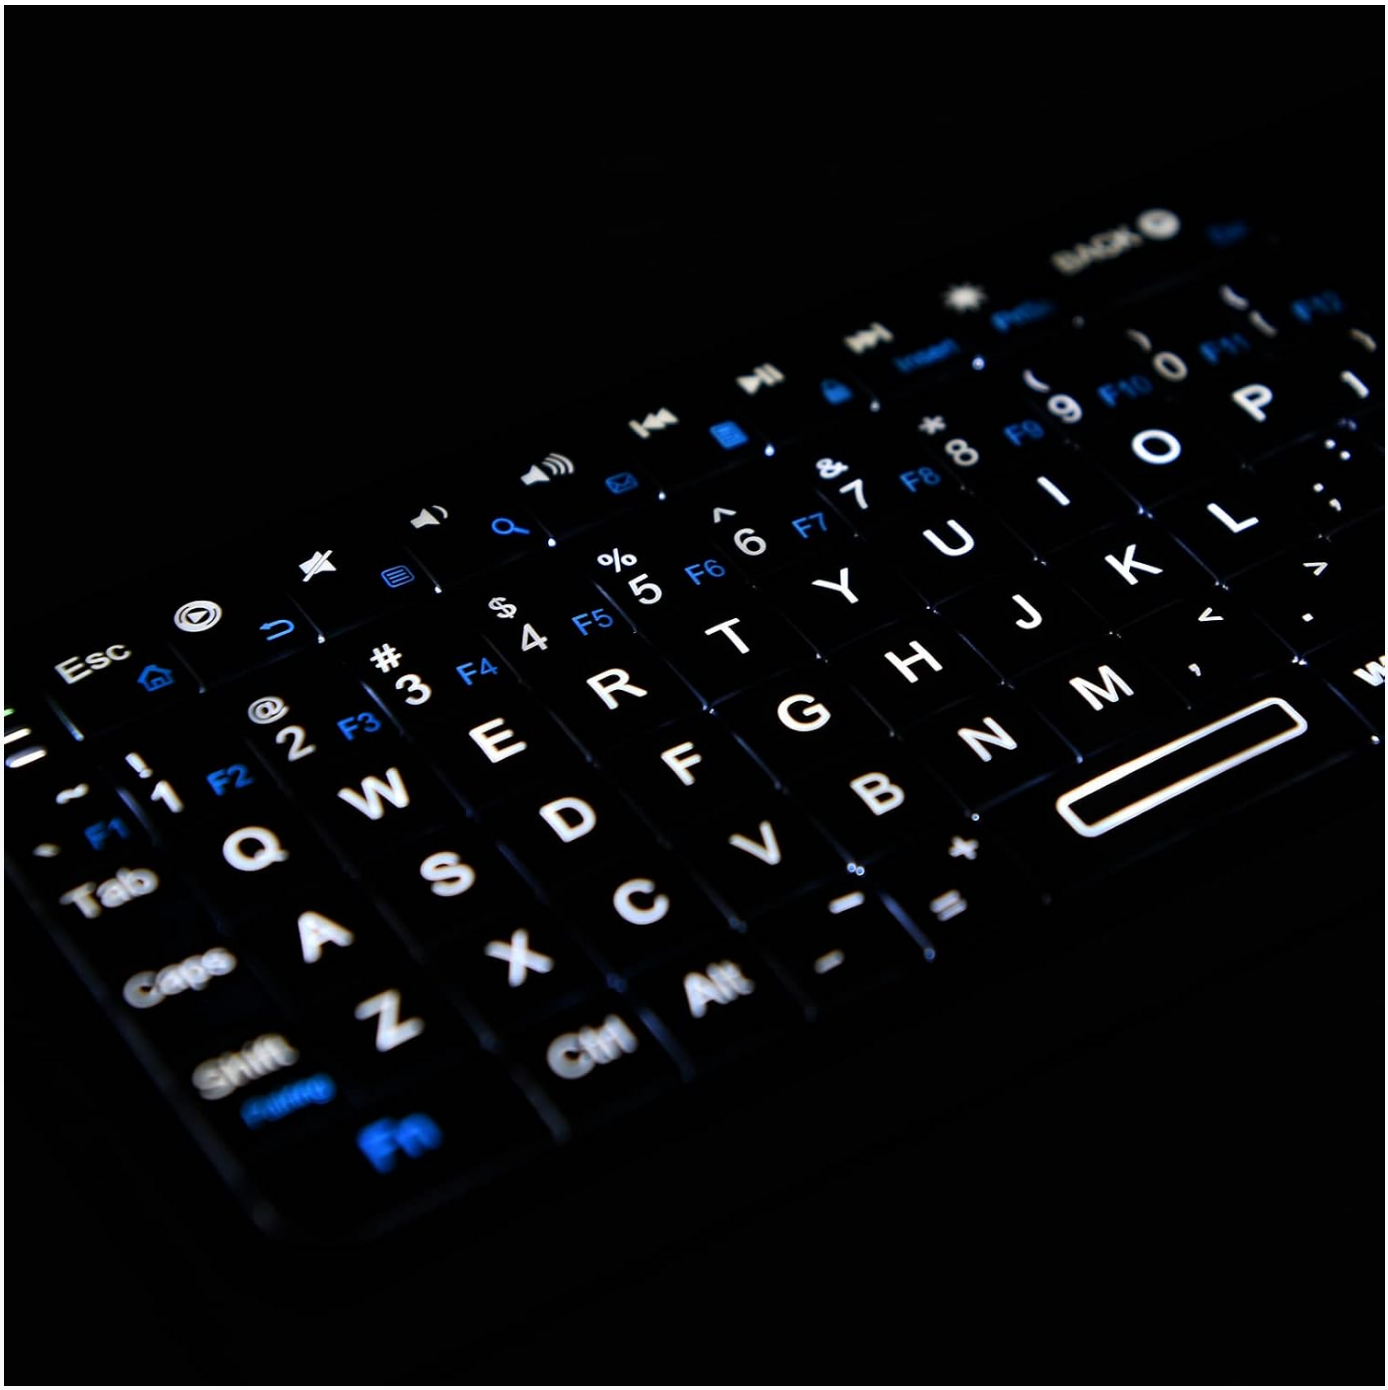


Image: Close-up view of the Rii K06 Mini Bluetooth Keyboard with its keys illuminated by the backlight.

4.3 IR Learning Function

The Rii K06 keyboard includes an infrared (IR) learning function, allowing you to program up to 10 keys to control other IR-enabled devices, such as TVs or set-top boxes. This feature is located on the back of the keyboard.



Image: The back of the Rii K06 Mini Bluetooth Keyboard, showing the IR learning buttons (C1, C2) and the power button.

To use the IR learning function:

1. Ensure the keyboard is powered on.
2. Press and hold the **IR Learning** button (usually indicated by a specific icon or text on the back) until the indicator light starts flashing slowly.
3. Point the remote control of the device you wish to control directly at the IR receiver on the Rii K06 keyboard (usually located near the IR learning buttons).
4. Press the button on your original remote that you want the Rii K06 to learn (e.g., Power button). The indicator light on the Rii K06 will flash rapidly.
5. Immediately press the corresponding programmable button on the Rii K06 keyboard (e.g., C1 or C2) where you want to store this function. The indicator light will flash slowly again, confirming successful learning.
6. Repeat for other buttons as needed.
7. Press the **IR Learning** button again to exit learning mode.

5. Maintenance

To ensure the longevity and optimal performance of your Rii K06 Mini Bluetooth Keyboard, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to wipe down the keyboard and touchpad. For stubborn dirt, slightly dampen the cloth with water or a mild, non-abrasive cleaner. Avoid excessive moisture.
- **Storage:** Store the keyboard in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** Avoid fully discharging the battery frequently. If storing for a long period, charge the battery to about 50% and recharge every few months to prevent deep discharge.
- **Avoid Drops:** Handle the keyboard with care to prevent damage from drops or impacts.

6. Troubleshooting

Problem	Possible Solution
Keyboard does not turn on.	Ensure the keyboard is charged. Connect it to a power source using the USB cable.
Unable to pair via Bluetooth.	Ensure the keyboard is in pairing mode (blue light flashing). Make sure Bluetooth is enabled on your device. Delete any previous pairings of "K06 BLE KEYBOARD" on your device and try again. Move the keyboard closer to your device. Restart both the keyboard and your device.
Keys or touchpad are unresponsive.	Check if the keyboard is connected (blue light solid). Recharge the battery. Try re-pairing the keyboard. Ensure no physical obstructions are affecting the keys or touchpad.
Backlight is not working.	Press the backlight control keys (e.g., Fn + F2) to toggle or adjust brightness. Ensure the battery has sufficient charge.
IR learning not working.	Ensure the keyboard is in IR learning mode. Point the original remote directly at the keyboard's IR receiver. Ensure the original remote's battery is not low. Try the learning process again, ensuring precise timing.

7. Specifications

Feature	Detail
Brand	Rii
Model Number	K06 (Bluetooth Only)
Connectivity Technology	Bluetooth

Feature	Detail
Keyboard Description	Accessible, QWERTY with Touchpad
Special Feature	Backlit, IR Learning
Color	Black
Number of Keys	84
Keyboard Backlighting Color Support	Single Color
Item Weight	4.6 ounces (approx. 130g)
Package Dimensions	7.17 x 4.09 x 0.87 inches (approx. 18.2 x 10.4 x 2.2 cm)
Batteries	1 Lithium Ion battery (included)
Compatible Devices	Laptop, Smart TV, PC/Macintosh Laptops, Tablets, HTPC/IPTV VR Glasses, PC/Macintosh Computers (Windows 10+, Android 5+, MacOS 10+, HID Compatible)

COMPATIBLE DEVICE



Image: Diagram illustrating compatible devices and the physical dimensions of the Rii K06 Mini Bluetooth Keyboard.

8. Warranty and Support

Rii products are manufactured to high quality standards. For information regarding warranty coverage, technical support, or service inquiries, please refer to the warranty card included with your product or visit the official Rii website. Keep your purchase receipt as proof of purchase for warranty claims.

For further assistance, you may also contact the seller directly through the platform where the product was purchased.

© 2024 Rii. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question