Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

MOUNTUP MU4007-07

MOUNTUP MU4007-07 Laptop Arm Mount User Manual

Model: MU4007-07

Introduction

Thank you for purchasing the MOUNTUP MU4007-07 Laptop Arm Mount. This manual provides detailed instructions for safe and efficient installation, operation, and maintenance of your new laptop arm. Please read this manual thoroughly before use and keep it for future reference.
This laptop arm is designed to hold one notebook PC. The tray can be removed to convert it into a monitor arm. It supports a load capacity of 1.5 to 8 kg and is compatible with 13 to 32-inch monitors. Standard VESA specifications supported are 75mm x 75mm and 100mm x 100mm.

Setup Instructions

The MOUNTUP MU4007-07 offers two primary installation methods: C-clamp and Grommet mount. All necessary screws and an easy-to-understand manual are included.

1. Choose Your Mounting Method

C-Clamp Installation

This method is suitable for desks with a thickness between 10mm and 85mm. It involves clamping the mount to the edge of your desk.

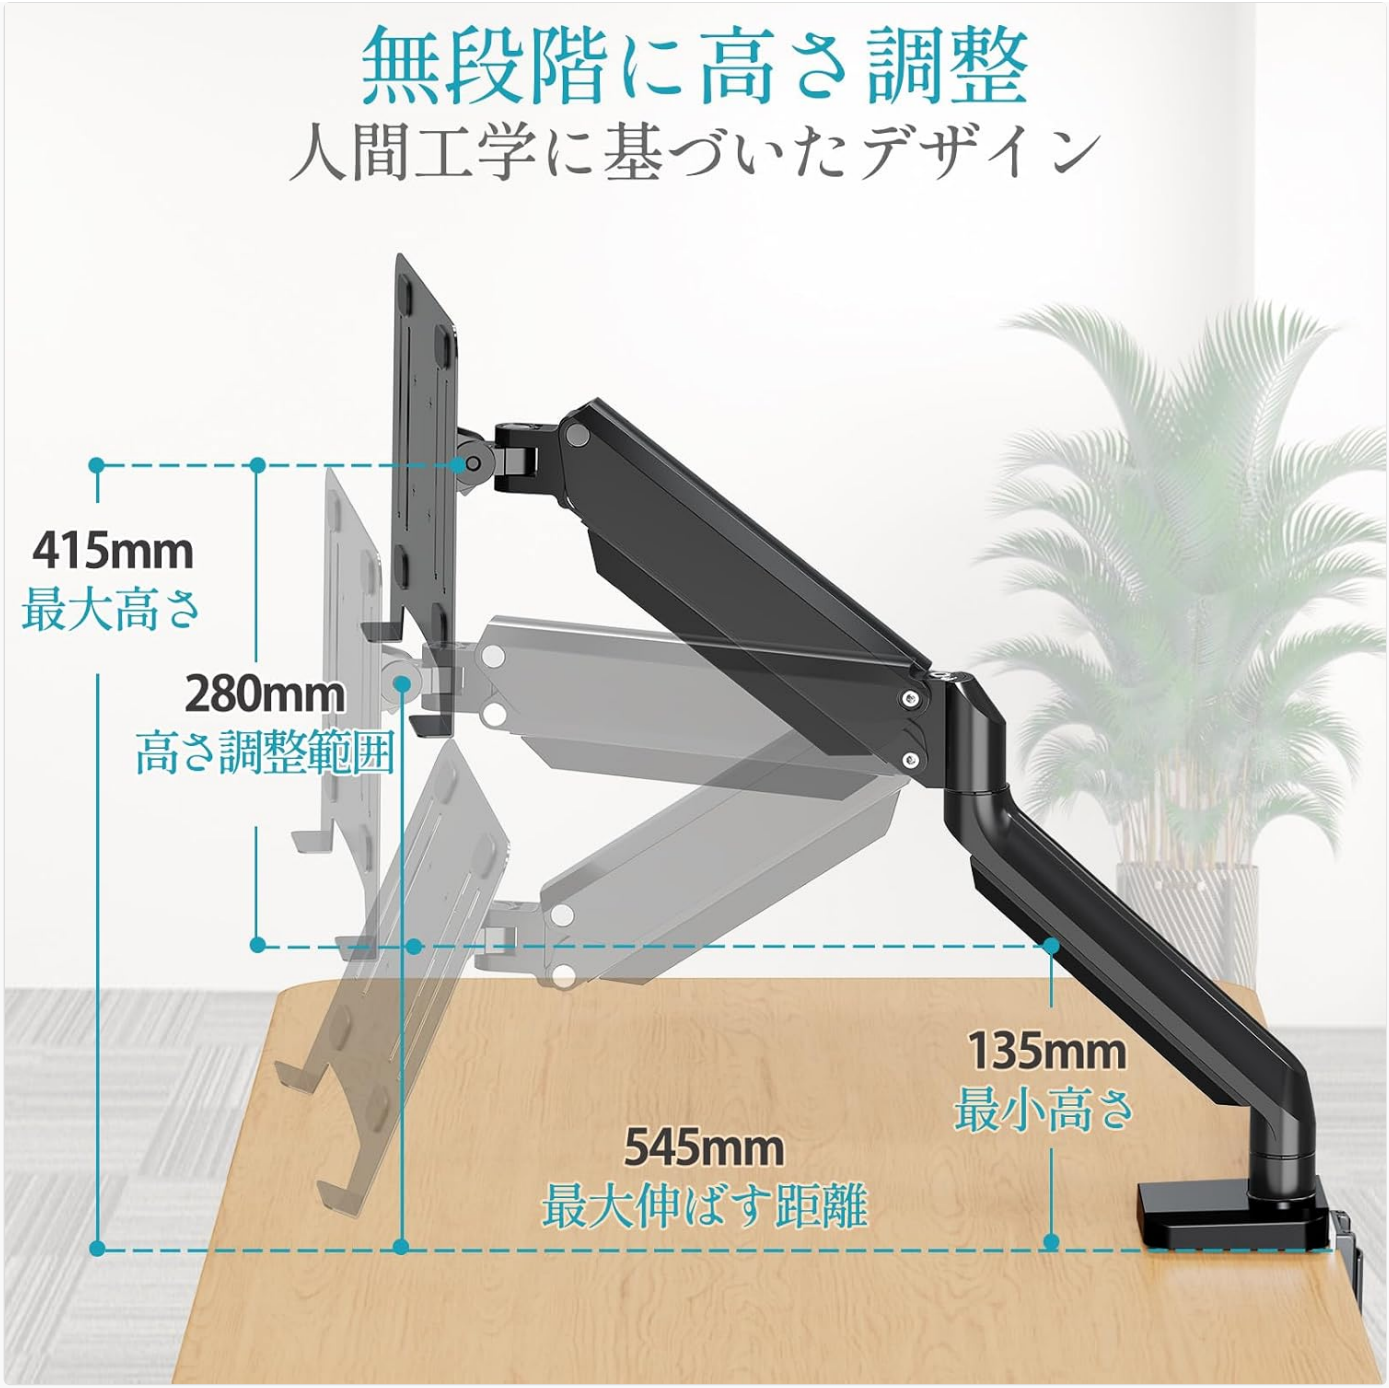


Image: Illustration of the C-clamp installation method, showing the clamp securing the arm to the desk edge.

Grommet Installation

This method is for desks with an existing grommet hole or where a hole can be drilled. It supports desk thicknesses from 10mm to 80mm and hole diameters from 10mm to 60mm.

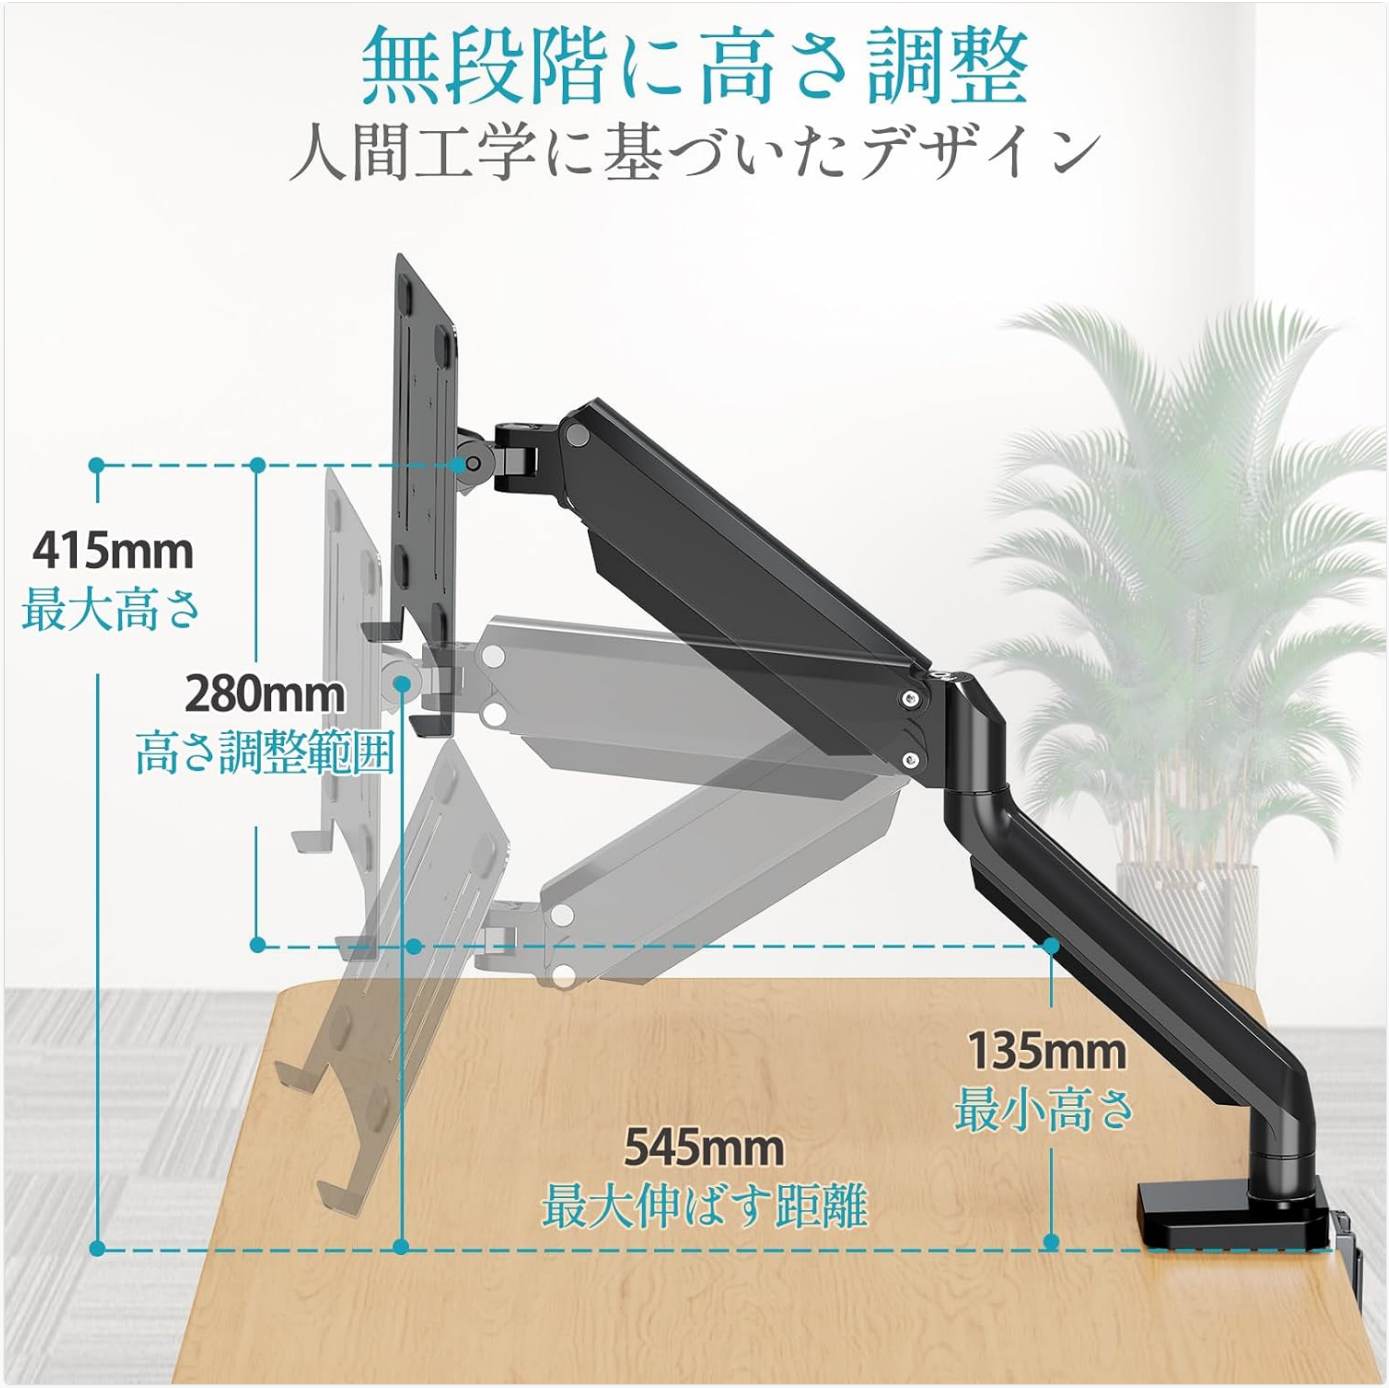


Image: Illustration of the grommet installation method, showing the arm secured through a desk hole.

2. Attaching the Laptop Tray or Monitor

1. If using a laptop, attach the laptop tray to the VESA plate using the provided screws. Ensure the non-slip pads are in place and use the safety strap to secure your laptop.
2. If using a monitor, attach your VESA-compatible monitor (75x75mm or 100x100mm) directly to the VESA plate using the appropriate screws.

3. Adjusting Gas Spring Tension

The built-in gas spring allows for smooth movement. Adjust the tension to match the weight of your laptop or monitor. Use the included hex wrench to turn the tension adjustment screw located on the arm.

- If the arm sags or moves down too easily: Turn the screw counter-clockwise (towards '+') to increase tension.
- If the arm rises or is difficult to push down: Turn the screw clockwise (towards '-') to decrease tension.



Image: Diagram illustrating how to adjust the gas spring tension using a hex wrench, with '+' and '-' indicators.

Operating Instructions

The MOUNTUP MU4007-07 arm provides extensive adjustability for optimal ergonomic positioning.

Multi-angle Adjustment

- **Tilt:** Adjust the screen vertically up to +45° and down to -45°.
- **Pan (Swivel):** Swivel the screen horizontally up to 90° left and 90° right.
- **Pivot:** Rotate the screen 360° for landscape or portrait orientation.
- The arm also allows forward and backward movement to adjust the distance to your screen.



Image: Visual representation of the arm's swivel, tilt, and pivot capabilities, showing a laptop being adjusted in various directions.

Height Adjustment

The gas spring mechanism allows for stepless height adjustment. Simply push or pull the arm to your desired height. The arm offers a height adjustment range of 280mm, with a maximum height of 415mm and a minimum height of 135mm from the desk surface. The maximum extension distance is 545mm.



Image: Diagram illustrating the height adjustment range and maximum extension of the arm.

Maintenance

- Regularly check all screws and connections to ensure they are tight and secure.
- Clean the arm and tray with a soft, damp cloth. Avoid using abrasive cleaners or solvents.
- Ensure the gas spring tension is correctly set for the weight of your device to prevent sagging or excessive force during adjustment.

Troubleshooting

- **Arm is too stiff or too loose:** Adjust the gas spring tension as described in the "Adjusting Gas Spring Tension" section.
- **Laptop/Monitor wobbles:** Ensure all mounting screws are tightened securely, both to the desk and to the VESA plate/laptop tray. Check that the desk surface is stable.
- **Laptop slides on the tray:** Verify that the non-slip pads are properly installed on the tray and that the safety strap is

securely fastened around the laptop.

Specifications

Feature	Specification
Brand	MOUNTUP
Model Number	MU4007-07
Color	Black
Compatible Devices	Laptops (13-32 inch), Monitors (13-32 inch)
Load Capacity	1.5 kg to 8 kg
VESA Compatibility	75mm x 75mm, 100mm x 100mm
Mounting Type	Desk Clamp (C-clamp), Grommet
Desk Clamp Thickness Range	10mm - 85mm
Grommet Mount Desk Thickness Range	10mm - 80mm
Grommet Hole Diameter Range	10mm - 60mm
Tilt Angle	+45° / -45°
Pan (Swivel) Angle	±90°
Pivot (Rotation)	360°
Height Adjustment Range	280mm (Min 135mm, Max 415mm)
Maximum Extension	545mm
Material	Alloy Steel

Warranty Information

MOUNTUP provides a **2-year quality warranty** from the date of purchase for this product. If you encounter any issues such as initial defects or deterioration over time, please contact us. We are committed to ensuring your satisfaction.

Customer Support

For any questions, concerns, or assistance with your MOUNTUP MU4007-07 Laptop Arm Mount, please contact our customer support team. You can typically find contact information through your order history page or the seller details page on the platform where you made your purchase.
Please note: If you experience any initial defects or missing parts, please reach out to us via your order history page or the seller details page. We are here to help.

© 2023 MOUNTUP. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0C3V9VQL3

More documents and user manuals: **https://manuals.plus/**