

THOMSON B206

THOMSON Sound Bar B206 User Manual

Model: B206

INTRODUCTION

Thank you for purchasing the THOMSON Sound Bar B206. This sound bar is designed to enhance your audio experience for television, music, and gaming, featuring multiple connectivity options and two wireless microphones for karaoke. This manual provides essential information for safe and efficient use of your device. Please read it thoroughly before operation and retain it for future reference.

SAFETY INFORMATION

- Do not expose the device to rain, moisture, or extreme temperatures.
- Ensure proper ventilation around the sound bar to prevent overheating.
- Do not open the casing; refer all servicing to qualified personnel.
- Use only the provided power adapter.
- Keep the device away from strong magnetic fields.
- Avoid placing heavy objects on the sound bar.

PACKAGE CONTENTS

Verify that all items listed below are included in your package:

- THOMSON Sound Bar (B206) x 1
- Remote Control x 1
- Wireless Microphone x 2
- Power Adapter x 1
- Audio Cable x 1
- Coaxial Cable x 1
- Optical Fiber Cable x 1
- Wall Mounting Kit x 1 (includes padlocks, gel column, screws)
- User Manual x 1

Everything You Need For Setup Included



Figure 1: Included Accessories

This image displays the complete set of items provided with your THOMSON Sound Bar B206, including the sound bar unit, remote control, two wireless microphones, power adapter, user manual, audio cable, coaxial cable, optical fiber cable, and wall mounting kit components.

PRODUCT OVERVIEW

Sound Bar Components

The THOMSON Sound Bar B206 features a sleek design with integrated controls and various input ports for versatile connectivity.



Figure 2: Sound Bar, Microphones, and Remote

This image shows the main sound bar unit, two wireless microphones, and the remote control, providing a complete view of the primary components.

Internal Speaker Design

The sound bar is equipped with four large dual drive units, delivering a maximum output power of 200 Watts for HiFi sound quality, including dual bass and clear mid-range frequencies for a 3D surround sound effect.



BLUETOOTH

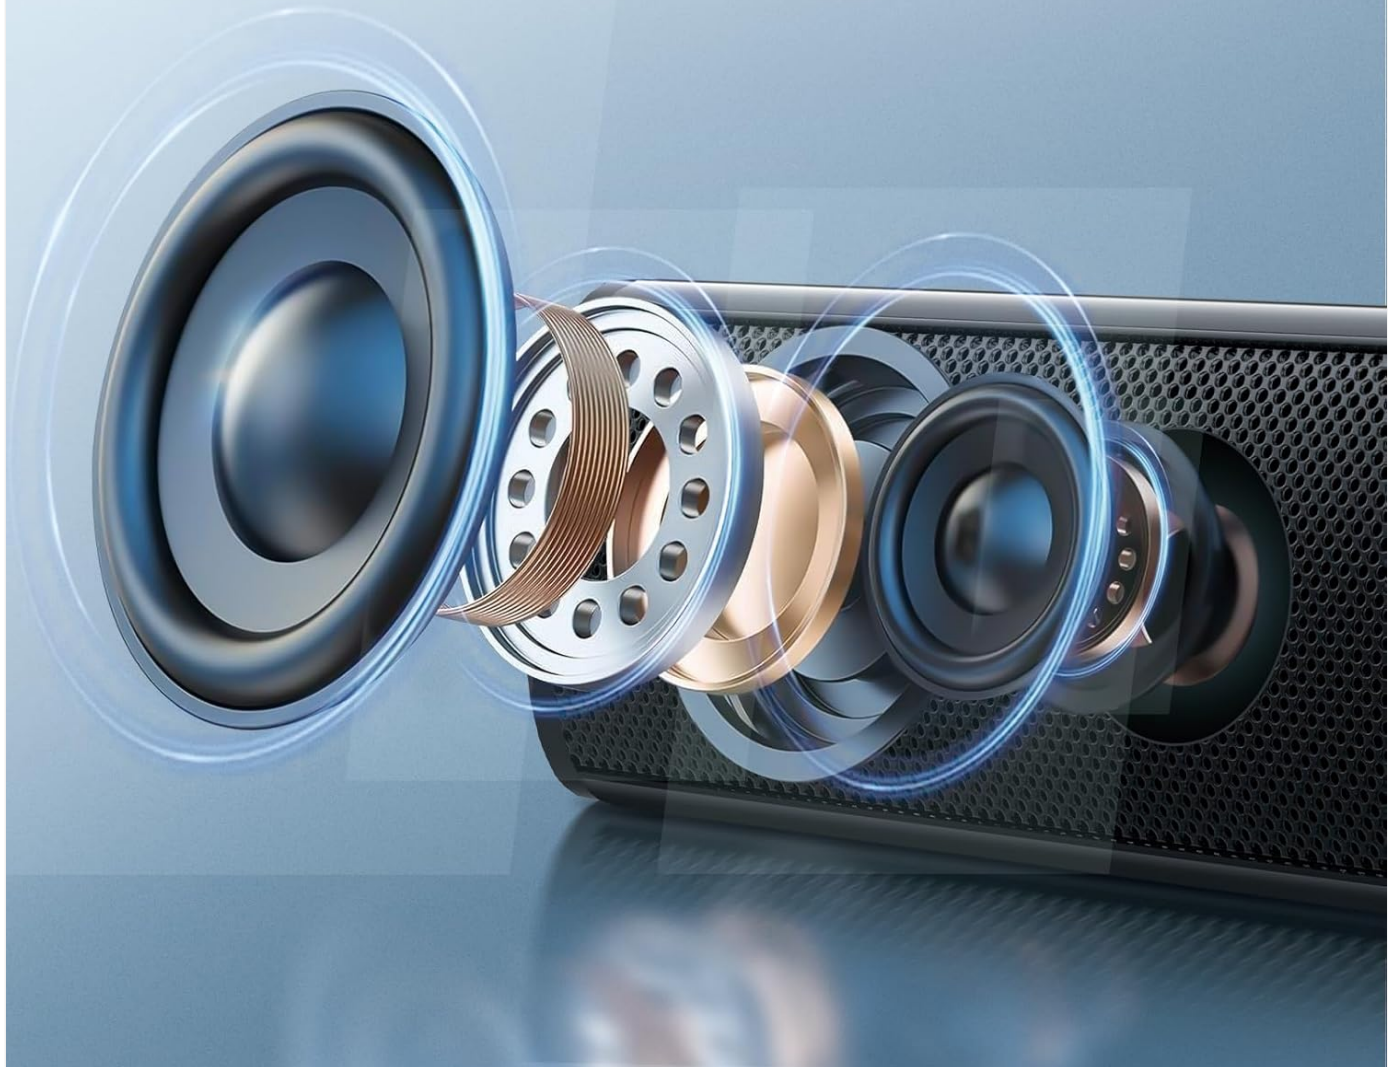


Figure 3: Internal Speaker Structure

This diagram illustrates the internal construction of the sound bar's speakers, emphasizing the dual drive units responsible for audio output, alongside the Bluetooth connectivity symbol.

Rear Panel Connections and Remote Control

The rear panel provides various input options, while the remote control offers full command over the sound bar's functions.



Wall Mount, Desktop

Wall mount kit included for an elegant setup



Figure 4: Rear Panel Ports and Remote Control

This image details the connectivity options on the sound bar's rear panel, including the power switch, HDMI ARC, power input, subwoofer output, coaxial, optical, and AUX inputs. The accompanying remote control is also shown, indicating various function buttons.

SETUP

1. Placement Options

The THOMSON Sound Bar B206 can be placed on a desktop or mounted on a wall. A wall mounting kit is included for convenient installation.

- **Desktop Placement:** Place the sound bar on a stable, flat surface in front of your TV.
- **Wall Mounting:** Use the provided wall mounting kit (padlocks, gel column, screws) to securely attach the sound bar to a wall below your TV. Ensure the wall material can support the weight of the sound bar.

Remote Control



Figure 5: Placement Options (Wall Mount and Desktop)

This image illustrates the versatility of the sound bar's placement, showing it both mounted on a wall beneath a television and resting on a media console, highlighting the included wall mount kit for an elegant setup.

2. Connecting to Power

1. Connect the power adapter to the "24V/2A Power Supply" port on the sound bar's rear panel.
2. Plug the power adapter into a wall outlet.

3. Audio Connections

Choose one of the following methods to connect the sound bar to your audio source (e.g., TV, smartphone, tablet, laptop):

- **HDMI ARC:**

Connect an HDMI cable (not included) from the HDMI ARC port on your TV to the HDMI port on the sound bar. Ensure your TV's HDMI ARC function is enabled in its settings.

- **Optical:**

Connect the provided optical fiber cable from your TV's optical output to the "Optical" port on the sound bar. Select "Optical" as the input source on the sound bar.

- **AUX (3.5mm Audio Jack):**

Connect the provided audio cable from your device's headphone jack or audio output to the "AUX IN" port on the sound bar. Select "AUX" as the input source.

- **Coaxial:**

Connect the provided coaxial cable from your TV's coaxial output to the "Coaxial" port on the sound bar. Select "Coaxial" as the input source.

- **USB:**

Insert a USB drive containing audio files into the "USB" port. The sound bar will automatically switch to USB mode and begin playback.

- **Bluetooth:**

Refer to the "Bluetooth Pairing" section under Operating Instructions for detailed steps.

OPERATING INSTRUCTIONS

1. Power On/Off

Press the **Power Off/On** button on the sound bar's rear panel or the **Power** button on the remote control to turn the unit on or off.

2. Input Source Selection

Press the **MODE** button on the remote control to cycle through available input sources: HDMI ARC, Optical, AUX, Coaxial, USB, and Bluetooth. The LED display on the sound bar will indicate the currently selected mode.

3. Volume Control

Use the **Volume +** and **Volume -** buttons on the remote control or the physical controls on the right side of the sound bar to adjust the volume. The sound bar supports 8 levels of bass and treble adjustment.

4. EQ Modes

The sound bar offers 5 Equalizer (EQ) modes to optimize audio for different content types. Press the **EQ** button on the remote control to switch between modes:

- **Movie Mode:** Enhances cinematic sound effects and dialogue.
- **Music Mode:** Optimizes audio for music playback.
- **News Mode:** Clarifies spoken dialogue for news and talk shows.
- Additional modes may be available for specific audio profiles.

Excellent Sound Experience

3 equalizer modes to match your program



Figure 6: EQ Modes

This image illustrates the three primary equalizer modes (News, Movie, Music) available on the sound bar, demonstrating how each mode is tailored for different audio experiences.

5. Bluetooth Pairing

1. Turn on the sound bar and select Bluetooth mode using the **MODE** button on the remote. The LED display will show "BT" and flash, indicating pairing mode.
2. On your device (smartphone, tablet, etc.), enable Bluetooth and search for available devices.
3. Select "THOMSON B206" from the list. Once connected, the sound bar's LED display will stop flashing.

6. Wireless Microphones

The sound bar comes with two wireless microphones for karaoke or vocal use.

1. Ensure the microphones have fresh batteries (AAA, not included).
2. Turn on the microphones. They should automatically pair with the sound bar.
3. Use the **MIC+** and **MIC-** buttons on the remote to adjust microphone volume.

4. Use the **ECHO+** and **ECHO-** buttons to adjust the echo effect.



Figure 7: Karaoke Functionality

This image depicts two individuals enjoying a karaoke session, utilizing the THOMSON sound bar and its wireless microphones connected to a large display, showcasing the product's entertainment capabilities.

TROUBLESHOOTING

Problem	Possible Cause	Solution
No power	Power cable not connected; Power outlet not active.	Ensure power cable is securely connected. Check if the power outlet is working.
No sound	Incorrect input source selected; Volume too low; Cables not connected properly.	Select the correct input source (HDMI, Optical, AUX, etc.). Increase volume. Check all audio cable connections.

Problem	Possible Cause	Solution
Bluetooth pairing failed	Sound bar not in pairing mode; Device too far; Bluetooth disabled on device.	Ensure sound bar is in Bluetooth mode and flashing. Move device closer. Enable Bluetooth on your device.
Microphones not working	Microphone batteries low/dead; Microphones not turned on.	Replace microphone batteries. Ensure microphones are switched on.
Volume jumps too much with one press	This can be a characteristic of the sound bar's volume control sensitivity.	Adjust volume carefully. Consider using the TV's volume control if connected via HDMI ARC, as it may offer finer adjustments.

SPECIFICATIONS

Feature	Detail
Model Name	THOMSON Sound Bar B206
Speaker Type	Soundbar
Speaker Maximum Output Power	200 Watts
Surround Sound Channel Configuration	2.0
Connectivity Technology	Auxiliary, Bluetooth, Coaxial, HDMI ARC, Optical, USB
Wireless Communication Technology	Bluetooth
Control Method	Remote
Product Dimensions	37"D x 3.35"W x 2.9"H
Item Weight	8.63 pounds
Material	Plastic
Power Source	Corded Electric
Special Feature	Wireless Microphones

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the surface of the sound bar. Do not use liquid cleaners or abrasive materials.
- **Storage:** When not in use for extended periods, store the sound bar in a cool, dry place, away from direct sunlight and extreme temperatures.
- **Microphone Care:** Remove batteries from the wireless microphones if they will not be used for a long time to prevent leakage.

WARRANTY AND SUPPORT

THOMSON products are designed and manufactured to the highest quality standards. For warranty information and customer support, please refer to the warranty card included in your package or visit the official THOMSON website. Keep your purchase receipt as proof of purchase.

COMPLIANCE INFORMATION

This device complies with relevant regulations for electronic equipment. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.



© 2023 THOMSON. All rights reserved.

Related Documents - B206


	Thomson D528 Computer Speakers User Manual and FCC Information User manual for Thomson D528 computer speakers, covering specifications, operation, Bluetooth connectivity, and FCC compliance. Includes detailed product description and connection guide.
	Thomson TC33B Remote Control Cross-Reference Guide A guide comparing original remote control buttons with their equivalents on the Thomson TC33B remote, detailing functions for TV, DVD, and other media devices. Includes button mapping for common operations like playback, volume, channel selection, and menu navigation.
	Thomson Smart TV ar Google TV: Lietotāja rokasgrāmata Šī visaptverošā lietotāja rokasgrāmata sniedz būtisku informāciju jūsu jaunā Thomson Smart TV ar Google TV uzstādīšanai un lietošanai. Tā aptver visu, sākot no sākotnējās instalācijas un savienojumiem līdz funkciju, iestatījumu un problēmu novēršanas izpētei.
	Thomson Go Plus Käyttöohje Tämä käyttöohje tarjoaa kattavat tiedot Thomson Go Plus -laitteen asentamisesta, käytöstä ja turvallisuusohjeista. Opi yhdistämään laitteesi, säätämään asetuksia ja käyttämään sen ominaisuuksia.
	Manuel d'utilisation THOMSON 24HD2S13 Manuel d'utilisation complet pour le téléviseur THOMSON 24HD2S13. Ce guide couvre l'installation, la configuration, l'utilisation des menus (image, son, chaînes), le dépannage, les spécifications techniques et les fonctions PVR et HDMI CEC. Accédez aux ressources en ligne de Thomson pour plus d'assistance.



[Thomson RC8002N Replacement Remote Control Guide](#)


This guide provides a comprehensive comparison between the original Thomson RC8002N remote control and a compatible replacement, detailing button functions and features for seamless operation of Thomson VCR/TV devices.

Documents - THOMSON – B206

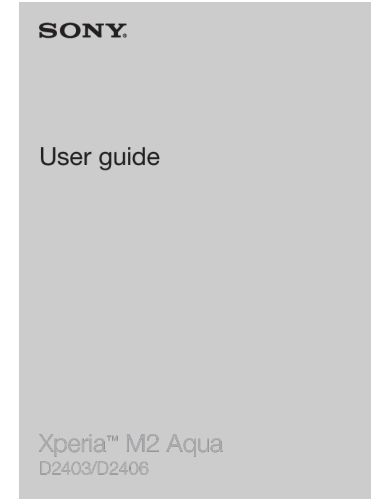


[\[pdf\]](#) Quick Start Guide Guide

Sony Mobile Communications AB sony xperia m2 aqua guide en support videotron media document
User guide Xperia™ M2 Aqua D2403/D2406 Contents Getting started..... ... shared video on your phone 3 To view a shared photo on your device GUID GUID-FC9F47BE-94A5-4AC3-**B206**-AB1BA8BA60D9 Title To view a shared photo on your phone Version 3 1 Make sure the devices ...
lang:en **score:17** filesize: 2.98 M page_count: 181 document date: 2014-08-01

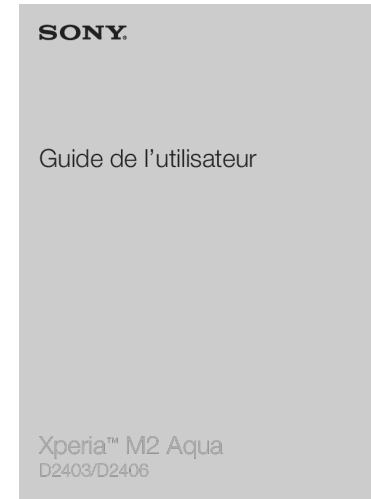

[\[pdf\]](#) Guide

Sony Mobile Communications AB sony xperia m2 user guide fr soutien videotron affaires media document 3500
Guide de l utilisateur Xperia™ M2 Aqua D2403/D2406 Table des matieres Mise en route..... ... n your phone 3 Pour visualiser sur votre appareil une photo partage GUID GUID-FC9F47BE-94A5-4AC3-**B206**-AB1BA8BA60D9 Title To view a shared photo on your phone Version 3 1 Vrifiez que les appare...
lang:fr **score:15** filesize: 3.04 M page_count: 189 document date: 2014-08-01

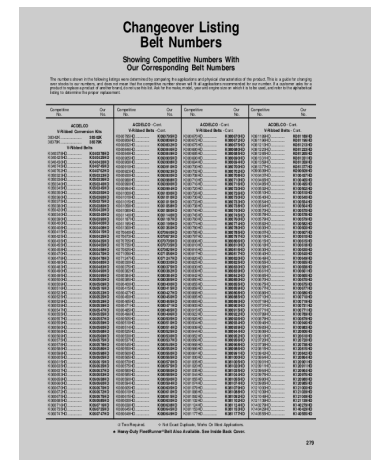

[\[pdf\]](#) Guide Catalog

2008 Gates Part Number ID Guide for CD and Web S Wayne Carrel Competitive Changeover Listings
vaglinks Docs Catalogues
Changeover Listing Belt Numbers Showing Competitive Numbers With Our Corresponding Belt Numbers The ... 03..... T203 TB204.....
T204 TB205..... T205 TB**B206**..... T206 TB207.....
T207 TB208..... T208...
lang:en **score:14** filesize: 1.09 M page_count: 270 document date: 2008-04-25




[Personal Choice 65 PPO 2025 Provider/Pharmacy Directory - IBX Health Insurance](#)

Find healthcare providers and pharmacies for IBX Personal Choice 65 PPO plans. This directory lists network doctors, specialists, and pharmacies in Pennsylvania, with contact information and usage guidance. Updated as of June 2025.
lang:en score:13 filesize: 15.53 M page_count: 2780 document date: 2025-05-28



[\[pdf\] User Manual](#)

getMANUAL SERVICE MANUAL JVC RX7000RBK avr sm audiocircuit dk jvc |||
RRX-77000000RRBBKK SERVICE MANUAL AUDIO/VIDEO CONTROL RECEIVER
RX-7000RBK Area Suffix E Continental ... C1361 C1372 R1384 R1382 R1383 R1364
R1381 R1362 R1374 B123 R1363 R1361 CN712 R1372 C1301 B301 **B206** CN303
B108 R1375 C1371 R1373 R1371 B127 B234 CN201 B356 B355 C862 D862 C861
D861 R863 B20...
lang:en score:12 filesize: 6.55 M page_count: 126 document date: 2019-04-02

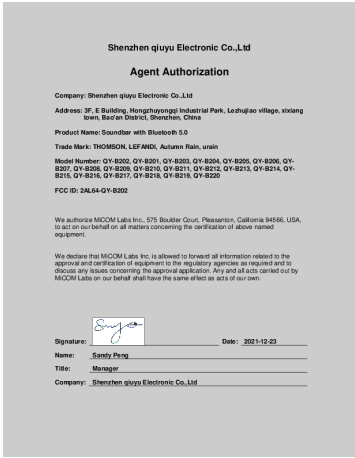

[\[pdf\] Agent Authorization](#)

PLEASE PRINT ON COMPANY LETTERHEAD MiCOM Labs Inc QMS Agent Authorization Rev 1 0
Shenzhen qiuyu Electronic Co Ltd QY B202 2AL64 2AL64QYB202 qy b202
Shenzhen qiuyu Electronic Co.,Ltd Agent Authorization Company: Shenzhen qiuyu
Electronic Co.,Ltd Add ... THOMSON, LEFANDI, Autumn Rain, urain Model Number:
QY-B202, QY-B201, QY-B203, QY-B204, QY-B205, QY-**B206**, QYB207, QY-B208,
QY-B209, QY-B210, QY-B211, QY-B212, QY-B213, QY-B214, QYB215, QY-B216,
QY-B21...
lang:en score:12 filesize: 14.24 K page_count: 1 document date: 2021-12-24



[\[pdf\]](#) User Manual

getMANUAL SERVICE MANUAL JVC RX6510VBK avr sm audiocircuit dk jvc |||

RX-6510VBK SERVICE MANUAL AUDIO/VIDEO CONTROL RECEIVER RX-6510VBK Area Suffix C Canada CATV/DB ... 033 B2034 B2035 B2036 Q815 B2001 B2002 B2003 B2004 B2005 B2006 Q317 VR301 Q309 TH301 R325 R327 **B206** R329 B2008 B2008 B2009 B2010 B2011 B2012 Q315 R343 C321 R331 Q311 Q313 C323 R333 R843 ...

lang:en score:12 filesize: 4.2 M page_count: 93 document date: 2019-04-02



[JVC RX-7000RBK Service Manual - Audio/Video Control Receiver](#)

This service manual provides detailed information for the JVC RX-7000RBK Audio/Video Control Receiver, including safety precautions, disassembly instructions, adjustment methods, and descriptions of major integrated circuits.

lang:en score:12 filesize: 7.88 M page_count: 126 document date: 2004-05-25



[\[pdf\]](#) User Manual

getMANUAL SERVICE MANUAL JVC RX7010VBK avr sm audiocircuit dk jvc |||

RX-7010VBK SERVICE MANUAL AUDIO/VIDEO CONTROL RECEIVER RX-7010VBK Area Suffix J U.S.A. CATV/DBS ... 033 B2034 B2035 B2036 Q815 B2001 B2002 B2003 B2004 B2005 B2006 Q317 VR301 Q309 TH301 R325 R327 **B206** R329 B2008 B2008 B2009 B2010 B2011 B2012 Q315 R343 C321 R331 Q311 Q313 C323 R333 R843 ...

lang:en score:12 filesize: 6.39 M page_count: 99 document date: 2019-04-02



[\[pdf\]](#) User Manual

getMANUAL SERVICE MANUAL JVC RX7010RBK avr sm audiocircuit dk jvc |||

RX-7010RBK/RX-7012RSL SERVICE MANUAL AUDIO/VIDEO CONTROL RECEIVER RX-7010RBK RX-7012RSL Area Suff ... 033 B2034 B2035 B2036 Q815 B2001 B2002 B2003 B2004 B2005 B2006 Q317 VR301 Q309 TH301 R325 R327 **B206** R329 B2008 B2008 B2009 B2010 B2011 B2012 Q315 R343 C321 R331 Q311 Q313 C323 R333 R843 ...

lang:en **score:12** filesize: 4.44 M page_count: 99 document date: 2019-04-02



[\[pdf\]](#) User Manual

getMANUAL Jvc RX 6510 VBK Service Manual vintageshifi 80 repertoire telecharge

RX-6510VBK SERVICE MANUAL AUDIO/VIDEO CONTROL RECEIVER RX-6510VBK Area Suffix C Canada CATV/DB ... 033 B2034 B2035 B2036 Q815 B2001 B2002 B2003 B2004 B2005 B2006 Q317 VR301 Q309 TH301 R325 R327 **B206** R329 B2008 B2008 B2009 B2010 B2011 B2012 Q315 R343 C321 R331 Q311 Q313 C323 R333 R843 ...

lang:en **score:12** filesize: 4.39 M page_count: 93 document date: 2004-05-25



[\[pdf\]](#) User Manual

getMANUAL Jvc RX 7010 VBK Service Manual vintageshifi 80 repertoire telecharge

RX-7010VBK SERVICE MANUAL AUDIO/VIDEO CONTROL RECEIVER RX-7010VBK Area Suffix J U.S.A. CATV/DBS ... 033 B2034 B2035 B2036 Q815 B2001 B2002 B2003 B2004 B2005 B2006 Q317 VR301 Q309 TH301 R325 R327 **B206** R329 B2008 B2008 B2009 B2010 B2011 B2012 Q315 R343 C321 R331 Q311 Q313 C323 R333 R843 ...

lang:en **score:12** filesize: 6.58 M page_count: 99 document date: 2004-05-25



[\[pdf\]](#) User Manual

getMANUAL Jvc RX 7001 PGD Service Manual vintageshifi 80 repertoire telecharge

RX-7001PGD SERVICE MANUAL AUDIO/VIDEO CONTROL RECEIVER RX-7001PGD Area Suffix A Australia UF ... C1361 C1372 R1384 R1382 R1383 R1364 R1381 R1362 R1374 B123 R1363 R1361 CN712 R1372 C1301 B301 **B206** CN303 B108 R1375 C1371 R1373 R1371 B127 B234 CN201 B356 B355 C862 D862 C861 D861 R863 B20...

lang:en score:11 filesize: 7.54 M page_count: 137 document date: 2004-05-25



[\[pdf\]](#) User Manual

getMANUAL Jvc RX 7010 RBK Service Manual 7012 RSL vintageshifi 80 repertoire telecharge

RX-7010RBK/RX-7012RSL SERVICE MANUAL AUDIO/VIDEO CONTROL RECEIVER RX-7010RBK RX-7012RSL Area Suff ... 033 B2034 B2035 B2036 Q815 B2001 B2002 B2003 B2004 B2005 B2006 Q317 VR301 Q309 TH301 R325 R327 **B206** R329 B2008 B2008 B2009 B2010 B2011 B2012 Q315 R343 C321 R331 Q311 Q313 C323 R333 R843 ...

lang:en score:11 filesize: 4.62 M page_count: 99 document date: 2004-05-25



[Keystone 65 HMO/HMO-POS 2025 Provider/Pharmacy Directory](#)

A comprehensive directory of network providers and pharmacies for Keystone 65 HMO/HMO-POS plans, including Basic, Essential, Liberty, Preferred, and Select options. This guide serves members in Pennsylvania's Bucks, Chester, Delaware, Montgomery, and Philadelphia counties, offering essential information for accessing healthcare services and managing prescriptions.

lang:en score:11 filesize: 15.19 M page_count: 2724 document date: 2025-05-28