

[Manuals.plus](#) /

› [WenineStar](#) /

› WenineStar 20-inch Ceiling Fan with Light User Manual (Model WenineStar-2026)

WenineStar WenineStar-2026

WenineStar 20-inch Ceiling Fan with Light User Manual

Model: WenineStar-2026

1. IMPORTANT SAFETY INFORMATION

Please read all instructions carefully before installation and use. Retain this manual for future reference.

- **Electrical Safety:** Always turn off the power at the circuit breaker or fuse box before beginning installation or performing any maintenance. Ensure all electrical connections comply with local codes and ordinances. If you are unsure about wiring, consult a qualified electrician.
- **Mounting:** Ensure the mounting structure can support the weight of the fan. The fan must be mounted with the blades at least 7 feet (2.1 meters) from the floor.
- **Blade Clearance:** Maintain a minimum clearance of 30 inches (76 cm) from the wall to the blade tips to ensure proper airflow and prevent interference.
- **Cleaning:** Always disconnect power before cleaning. Use a soft, damp cloth. Do not use abrasive cleaners.
- **Children and Pets:** Keep children and pets away from the fan during operation and maintenance.

2. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Ceiling Fan with Integrated Light
- Remote Control
- Mounting Hardware
- Instruction Manual

3. PRODUCT SPECIFICATIONS

Brand	WenineStar
Model Number	WenineStar-2026
Size	20 inches (Diameter)
Dimensions (L x W x H)	20"L x 20"W x 5"H
Material	Wood, PMMA
Mounting Type	Semi Flush Mount
Light Source	Integrated LED
Wattage	50 watts
Brightness	Up to 4500 lumens
Control Method	Remote Control, App Operable
Fan Speeds	6
Motor Type	Reversible, Silent (approx. 35dB)

Recommended room size: 90-225 sq.ft.



Diagram showing the dimensions of the WenineStar 20-inch ceiling fan and recommended room size of 90-225 sq.ft.

4. INSTALLATION GUIDE

The WenineStar ceiling fan is designed for easy installation. Most components are pre-assembled. Follow these general steps:

1. **Prepare for Installation:** Turn off power at the circuit breaker. Clear the work area.
2. **Mounting Bracket:** Secure the mounting bracket to the ceiling junction box. Ensure it is firmly attached and can support the fan's weight.
3. **Wiring:** Connect the fan's electrical wires to the household wiring according to the wiring diagram provided in the separate installation instructions. Typically, this involves connecting live, neutral, and ground wires. Use wire nuts to secure connections.
4. **Attach Fan Body:** Carefully lift the fan body and attach it to the mounting bracket. Ensure all screws are tightened securely.
5. **Final Checks:** Double-check all connections and ensure the fan is securely mounted. Restore power at the circuit breaker.

Refer to the detailed installation instructions included in your package for specific wiring diagrams and mounting procedures.


5. OPERATING INSTRUCTIONS

Your WenineStar ceiling fan can be controlled via the included remote control or a compatible smartphone application.


5.1 Remote Control Functions

The remote control allows for comprehensive adjustment of fan and light settings:

- **Power On/Off:** Separate buttons for fan and light.
- **Fan Speed:** Select from 6 adjustable fan speeds.
- **Light Dimming:** Adjust light brightness from 0% to 100%.
- **Color Temperature:** Cycle through warm light (3000K), natural light (4500K), and cold white light (6000K).
- **Reversible Motor:** Change fan direction for summer (downdraft) or winter (updraft) modes.
- **Timer:** Set the fan to turn off automatically after 1 or 2 hours.
- **Night Light Mode:** Activates a low-brightness light setting.
- **Mute:** Silences operational beeps.

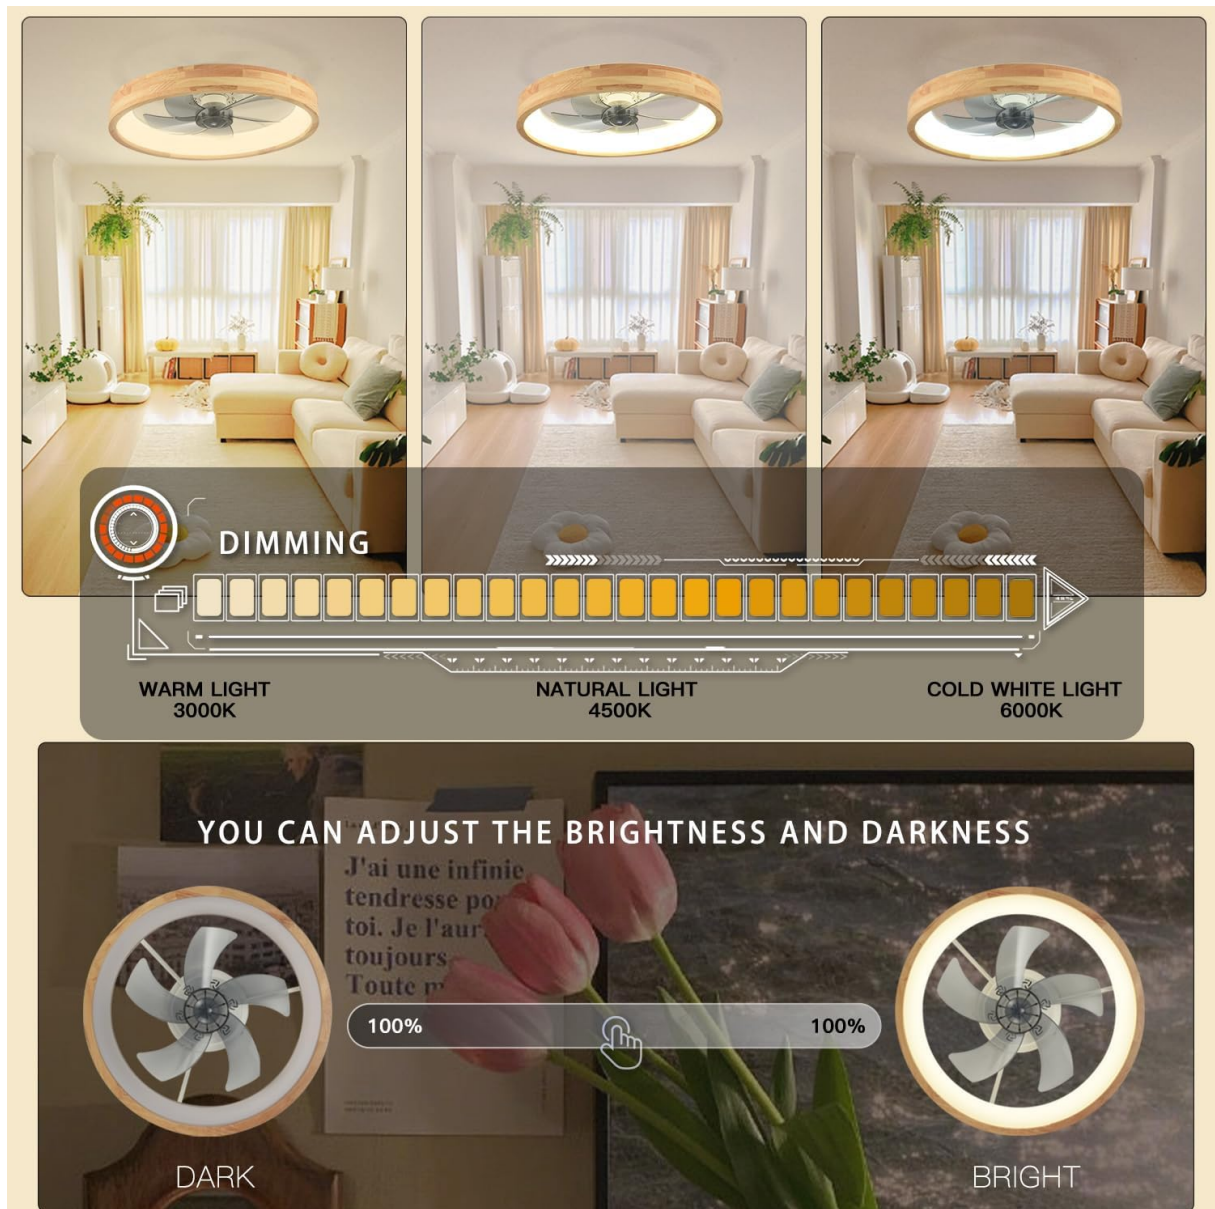

Adjust light brightness and color temperature from warm to cool white.

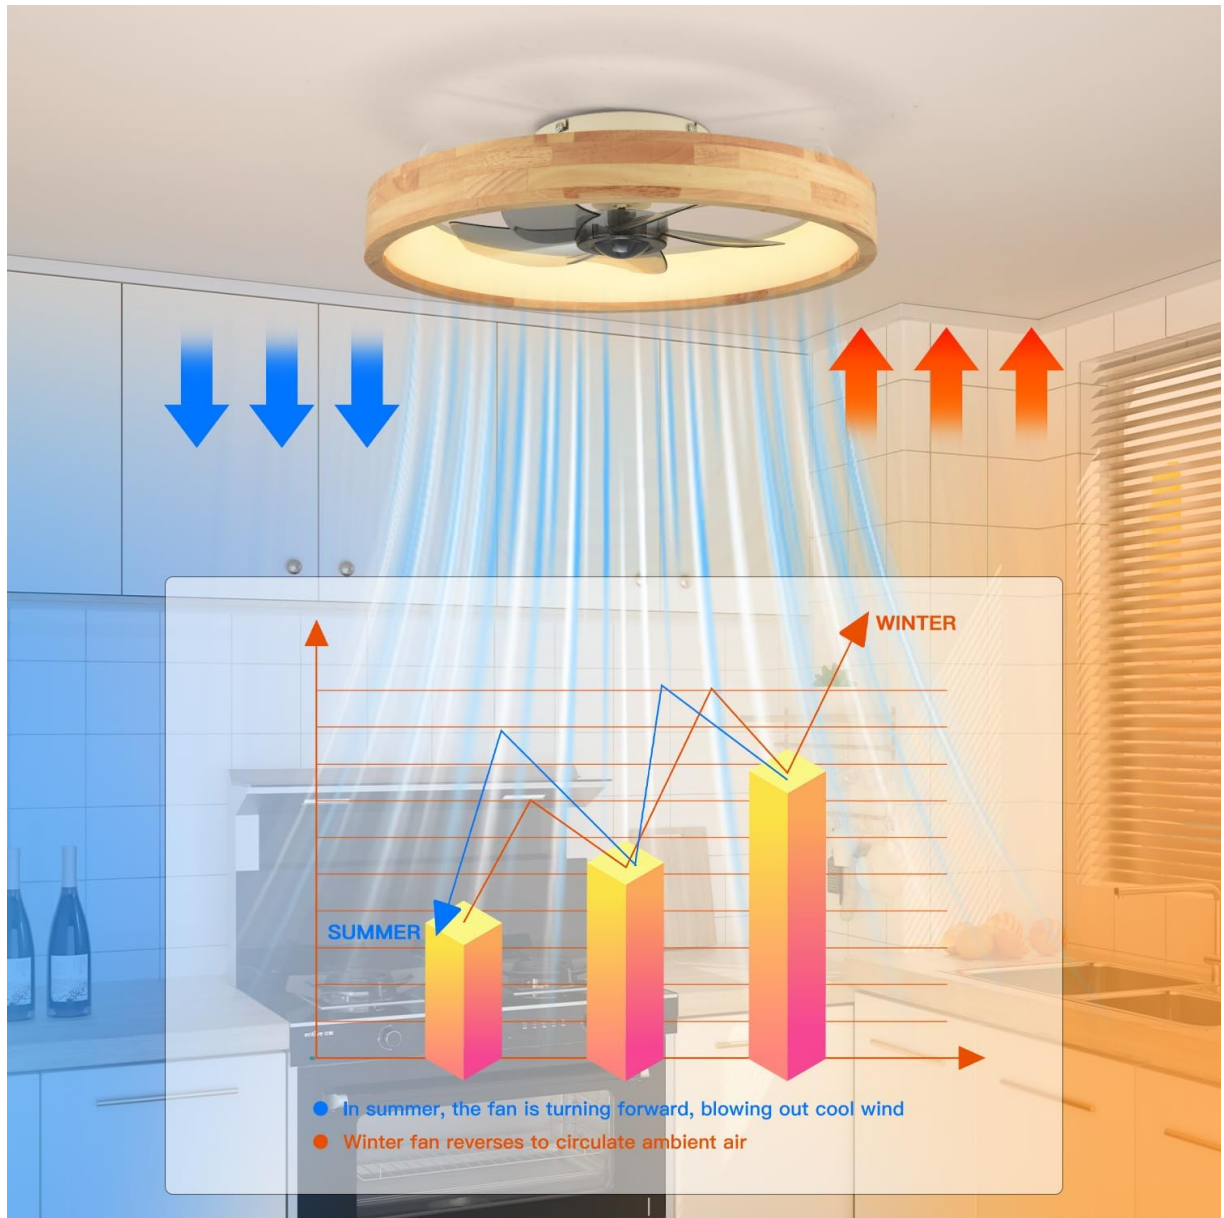

Utilize the reversible motor for optimal airflow in both summer and winter.



Overview of the fan's key features, including dimming, fan speeds, and timing.

EASY TO CLEAN

HIGH-QUALITY PMMA LAMPSHADE, CLOSED SHAPE, ANTI-FOULING DUST-PROOF, INSECT-PROOF, EASY TO CLEAN.

TIPS: PLEASE TURN OFF THE POWER WHEN CLEANING!

DARK SPOT BLACK KNOT	SHADOW	CRAFT SPLICING	NATURAL COLOR DIFFERENCE

NATURAL TEXTURE OF SOLID WOOD

WE HAVE PASSED RAW MATERIAL LEVEL CONTROL AND STRICT MATERIAL SELECTION MOST OF THE OBVIOUS COLOR DIFFERENCE AND FLAWS HAVE BEEN AVOIDED, BUT THE SLIGHT COLOR DIFFERENCE, SLIPKNOT, TIGER SPOT, BLACK LINE, ETC. OF SOLID WOOD CANNOT, AND SHOULD NOT, ELIMINATE ALL ACCEPT THE GIFT OF NATURE WITH NATURAL FEELINGS

The fan operates quietly at approximately 35dB, ensuring a peaceful environment.

5.2 Smartphone App Control

For additional convenience, the fan can be controlled via a dedicated smartphone application. Download the app from your device's app store and follow the in-app instructions for pairing and control.



Control your fan and light settings using either the remote or a smartphone app.

5.3 Video Demonstration

Your browser does not support the video tag.

Video demonstrating the light and fan functions of the WenineStar ceiling fan, showcasing different light settings and fan speeds.

6. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** To clean the fan, ensure the power is turned off at the circuit breaker. Use a soft, lint-free cloth to wipe down the wooden frame and light cover. For the fan blades, a slightly damp cloth can be used. Avoid using harsh chemicals or abrasive cleaning materials, as these can damage the finish.
- **Dust Removal:** Periodically remove dust from the fan blades and motor housing to prevent accumulation that could affect performance.
- **Tighten Fasteners:** Check all screws and fasteners annually to ensure they are secure.



Instructions for easy cleaning of the fan, emphasizing power disconnection.

7. TROUBLESHOOTING

If you encounter issues with your WenineStar ceiling fan, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Fan does not start	No power supply; Loose wiring; Remote control battery low or not paired.	Check circuit breaker. Ensure all wiring connections are secure. Replace remote batteries or re-pair the remote control according to the separate remote pairing instructions.
Light does not turn on	No power supply; Loose wiring; LED module fault.	Check power. Verify wiring. If issue persists, contact customer support.
Remote control not working	Batteries dead; Not paired; Obstruction between remote and receiver.	Replace batteries. Re-pair the remote. Ensure clear line of sight to the fan's receiver.
Fan makes excessive noise	Loose screws; Unbalanced blades.	Check and tighten all mounting screws. Ensure blades are securely attached.
App control not connecting	Incorrect app version; Network issues; Pairing failure.	Ensure you have the latest app version. Check your Wi-Fi connection. Follow app's pairing instructions carefully.

8. WARRANTY AND SUPPORT

WenineStar products are manufactured to high-quality standards. For specific warranty details, please

refer to the warranty card included with your purchase or contact WenineStar customer support. If you require technical assistance or have questions regarding your product, please contact our customer support team through the contact information provided in your product packaging or on the official WenineStar website.