KENSID 50YI-D503NI

KENSID 48-Inch Ceiling Fan with Lights and Remote Control Instruction Manual

Model: 50YI-D503NI

Brand: KENSID

1. Introduction

This instruction manual provides detailed guidance for the safe installation, operation, and maintenance of your KENSID 48-inch Ceiling Fan. Please read this manual thoroughly before beginning installation or operation to ensure proper function and to prevent potential hazards. Keep this manual for future reference.



Image 1: KENSID 48-inch Ceiling Fan components including the fan unit, remote control, and reversible blades.

2. Safety Information

Always follow basic safety precautions when installing and operating electrical appliances to reduce the risk of fire, electric shock, and personal injury.

- Ensure the power is turned off at the circuit breaker before installation or servicing.
- All wiring must be in accordance with national and local electrical codes. Consult a qualified electrician if you are unsure about wiring procedures.
- The mounting structure must be capable of supporting the weight of the fan (approximately 13.47 pounds).
- Maintain a minimum clearance of 7 feet from the floor to the fan blades.
- Do not operate the fan if any part is damaged.

3. Package Contents

Verify that all components are present before beginning installation:

- Fan Motor Assembly (x1)
- Fan Blades (x5)
- Decorative Covers (x5)
- Blade Holders (x5)
- LED & Light Kit Pan (x1)
- Downrods (5-inch and 10-inch options)
- Suspension Ball (x1)
- Canopy (x1)
- Canopy Cover (x1)
- Yoke Cover (x1)
- Remote Control (x1)
- Receiver (x1)
- Hardware Pack (screws, cotter pin, cross pin, etc.)



Image 2: Key features and components of the KENSID 48-inch Ceiling Fan.

4. Setup & Installation

Refer to the following steps and the installation video for detailed instructions. Ensure power is off before starting.

4.1. Mounting Bracket Installation

Secure the mounting bracket to the ceiling junction box using the provided expansion bolts. Ensure it is firmly attached to support the fan's weight.

4.2. Blade Assembly

Attach each of the five fan blades to the blade holders using the provided screws. The blades are double-sided, allowing you to choose between two different finishes. Then, attach the assembled blades to the fan motor assembly.

4.3. Downrod Assembly

Select the appropriate downrod (5-inch or 10-inch) for your ceiling height. Insert the downrod through the canopy, canopy cover, and yoke cover. Secure the downrod to the fan motor assembly using the cross pin and cotter pin.

4.4. Wiring

Carefully connect the fan's electrical wires to the household wiring according to the wiring diagram. Ensure all connections are secure and properly insulated. Install the receiver for remote control functionality.

4.5. Final Assembly

Lift the fan assembly and hang it onto the mounting bracket. Slide the canopy up to cover the mounting bracket and secure it. Finally, attach the LED light kit pan to the bottom of the fan motor assembly.

Installation Video Guide

Video 1: A comprehensive guide demonstrating the step-by-step installation process for the KENSID Ceiling Fan.

5. Operating Instructions

Your KENSID ceiling fan is operated using the included multi-function remote control.



Image 3: Remote control layout and functions.

5.1. Fan Speed Control

Use the numbered buttons (1-6) on the remote to adjust the fan speed. '1' is the lowest speed, and '6' is the highest speed.

5.2. Light Control

Press the 'LIGHT ON/OFF' button to turn the LED light on or off. Continuously pressing this button cycles through three color temperatures: cool white (6000K), natural light (4500K), and warm white (3000K).



Image 4: Adjustable 3-color LED light settings.

5.3. Timer Function

Set the fan to automatically turn off after 1, 4, or 8 hours using the corresponding timer buttons (1H, 4H, 8H).

5.4. Forward/Reverse Function

Use the 'F' (Forward) and 'R' (Reverse) buttons to change the direction of the fan blades. The forward mode (downward airflow) is ideal for cooling in summer, while the reverse mode (upward airflow) helps circulate warm air in winter.

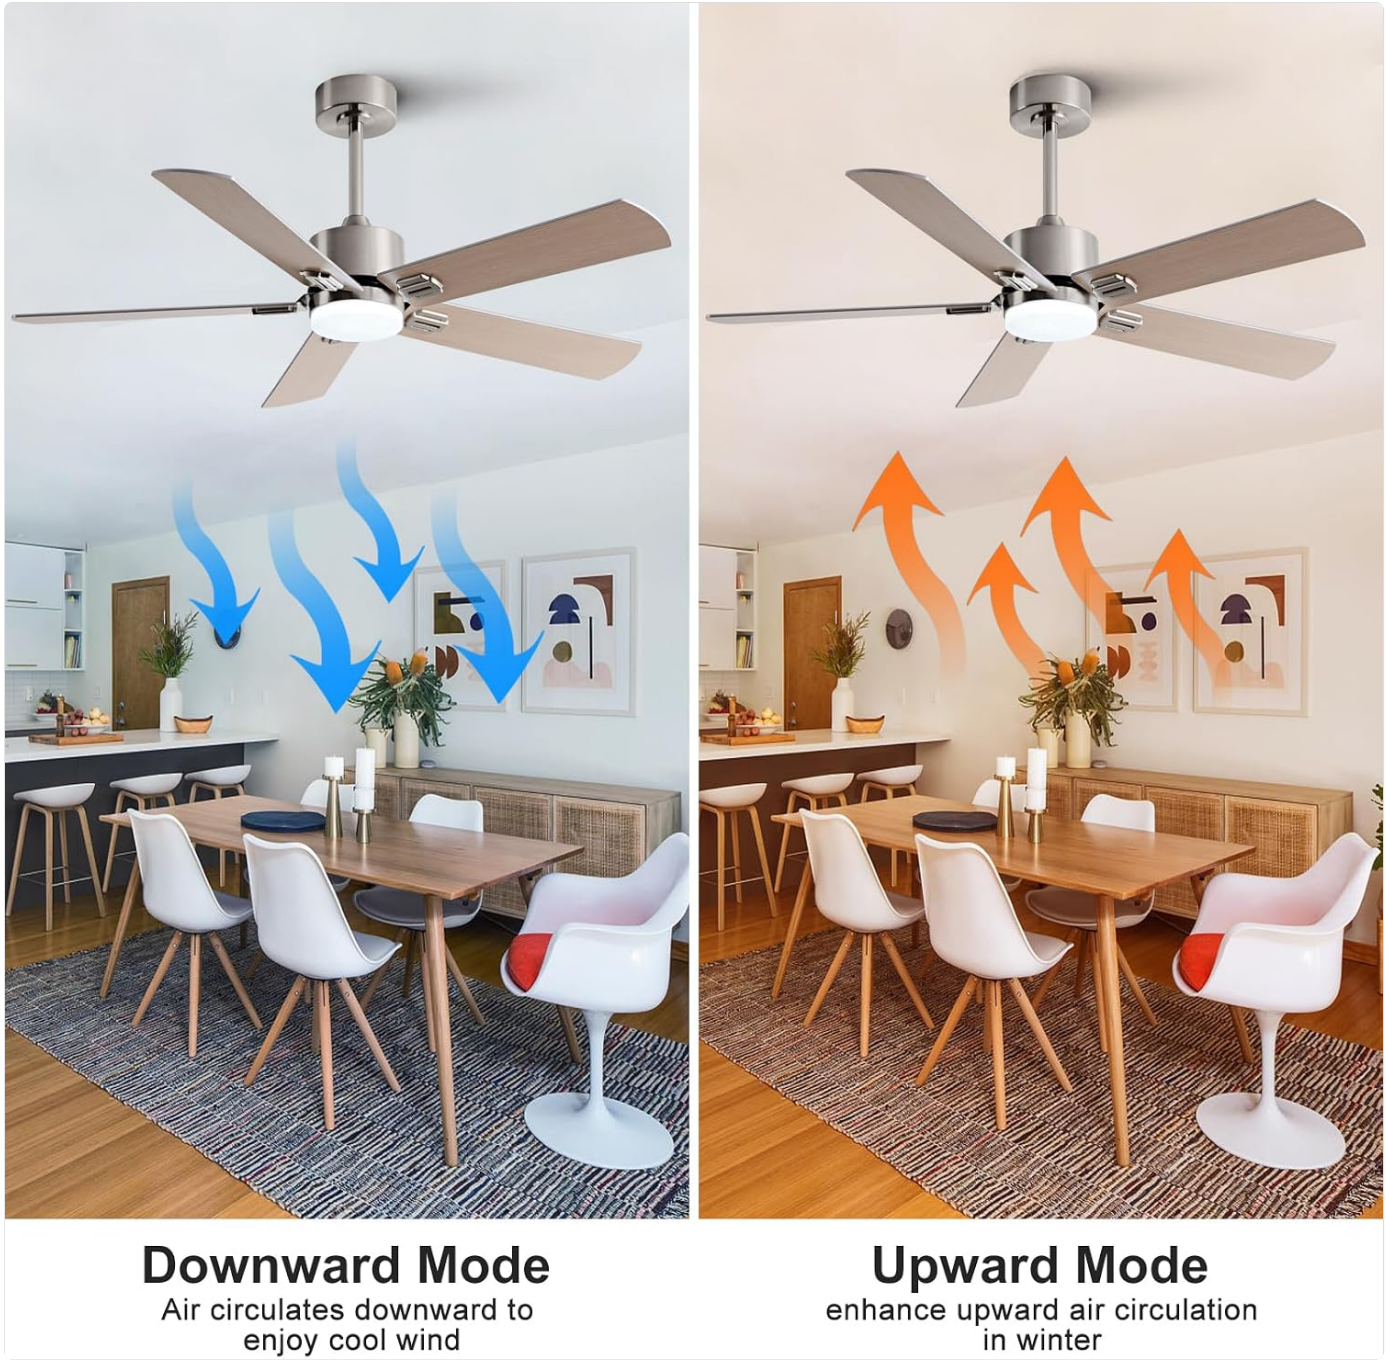


Image 5: Seasonal airflow modes (Downward for summer, Upward for winter).

5.5. Memory Function

The fan includes a smart memory function. Long-pressing 'ALL OFF' activates/deactivates fan speed and status memory. Long-pressing 'LIGHT ON/OFF' enables/disables light state memory. With these functions, the fan and light will resume their previous settings even without using the remote control after power cycling.

5.6. Sound Prompt

A sound prompt function can be enabled or disabled via the remote control.

6. Maintenance

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** Dust the fan blades and light kit regularly with a soft, damp cloth. Do not use abrasive cleaners or

solvents.

- **Periodic Inspection:** Periodically check all screws and connections for tightness. Ensure the mounting hardware remains secure.
- No lubrication is required for the motor.

7. Troubleshooting

If you experience issues with your fan, refer to the following common problems and solutions:


- **Fan does not operate:** Check power supply, circuit breaker, and ensure all wiring connections are secure. Verify the remote control batteries are functional.
- **Light does not work:** Check wiring connections to the light kit. Ensure the light function is enabled on the remote.
- **Fan wobbles:** Ensure all blade screws are tightened. Check that the mounting bracket is securely fastened to the ceiling. Verify blades are balanced.
- **Remote control not responding:** Replace batteries in the remote. Ensure the receiver is properly installed and connected.

If problems persist, contact KENSID customer support for assistance.

8. Specifications

Feature	Specification
Brand	KENSID
Model Name	Ceiling fans (50YI-D503NI)
Size	48 inch
Color	Brushed Nickel/Silver
Electric Fan Design	Ceiling Fan
Power Source	DC
Style	Modern Brushed Nickel Ceiling Fan with Light
Product Dimensions	48"D x 48"W x 13"H
Room Type	Bedroom, Dining Room, Living Room, Office, Study Room
Special Feature	Adjustable 3 Color LED Lights and Lighting Memory, 6 Speed Remote Control, 5 Double-sided Wooden Fan Blades, DC Motor, Forward and Reverse Function
Recommended Uses	Air Circulation

Wattage	35 watts
Finish Type	Brushed Nickel Coated
Number of Blades	5
Blade Length	48 Inches
Speed	180 RPM
Voltage	120 Volts (AC)
Switch Type	Remote Control
Item Weight	13.47 pounds (6.12 Kilograms)
Included Components	Light Kit, Remote Control, DC motor, LED light
Indoor/Outdoor Usage	Indoor, Outdoor
Control Method	Remote
Is Cordless?	Yes
Number of Power Levels	1 (referring to the power source, not fan speeds)
Main Power Connector Type	2-Pin
Manufacture Year	2024
Date First Available	May 26, 2023

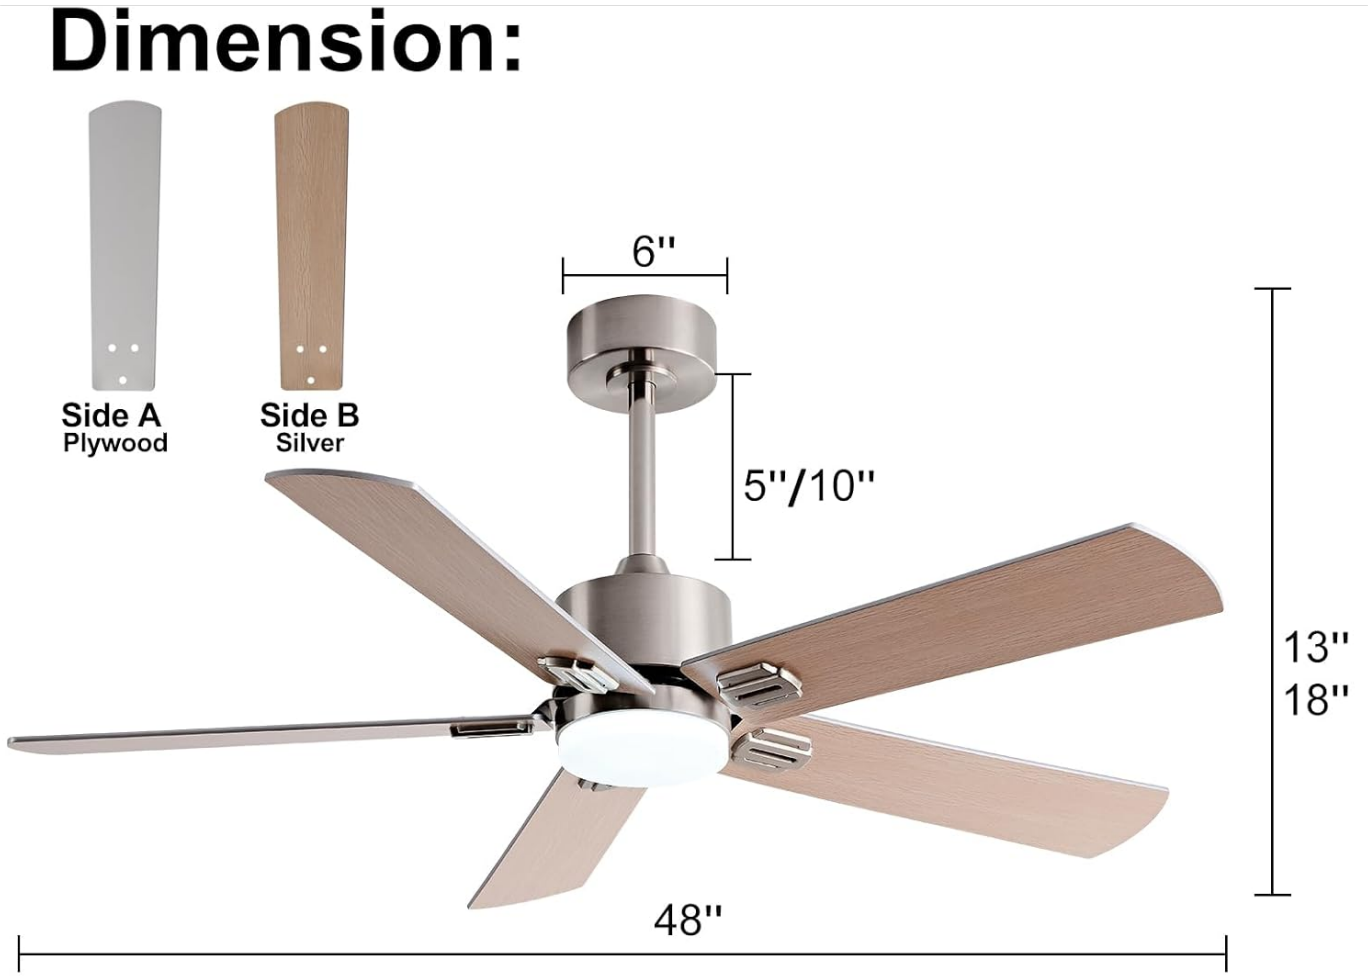

Product Name	48-inch Ceiling Fan	Gross Weight	6.6KG
Rated Voltage	110V-265V	Lampshade Size	∅180mm
Motor Power	35W	Motor Spec	∅153*7mm
Control Method	Remote Control	Overall Height	335mm(with 5" rod)
Lamp Configuration	15W LED	Fan Blade	5 Splint Fan Blades

Image 6: Product dimensions and detailed specifications table.

9. Warranty & Support

KENSID provides a **12-month Lifetime Warranty** for every customer. If you encounter any problems using or installing the fan, or if your light source is broken, please contact us. We will assist you with troubleshooting or issue a replacement if necessary. For any after-sales problems, our support team is ready to help.

For further assistance, please visit the KENSID Store on Amazon.

© 2024 KENSID. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question