**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



**AMOROM AMOROM C1 Cam**

# AMOROM C1 Cam Indoor Security Camera User Manual

Model: AMOROM C1 Cam (AM-C1-02)

## 1. Introduction

This manual provides essential instructions for the setup, operation, and maintenance of your AMOROM C1 Cam Indoor Security Camera. Please read this guide thoroughly before using the product to ensure proper functionality and safety.



Image: AMOROM C1 Cam Indoor Security Camera (2-pack) and a smartphone showing live monitoring.

## 2. Package Contents

Verify that all items are present in your package:

- 2 x AMOROM Indoor Camera
- 2 x Power Adapter with USB Cable
- 2 x Screws Bag (for mounting)
- 1 x User Manual

## 3. Product Overview

The AMOROM C1 Cam is designed for indoor security, offering a range of features for monitoring your home, pets, or

elderly family members.




Image: Overview of AMOROM C1 Cam features including HD video, 2.4GHz WiFi, night vision, two-way audio, motion detection, and smart home compatibility.

## Key Features:

- **Smart AI Detection & Instant Alerts:** Identifies human movement, pets, vehicles, or packages. Sends real-time alerts via the Amorom app.
- **Real-Time 2-Way Talk & 1080P HD Night Vision:** Built-in microphone and speaker for two-way communication. 6 infrared LEDs provide 33ft night vision.
- **Fire/Smoke Alert & Cloud Analysis:** Proactive fire detection with instant app notifications.
- **Voice Control & Smart Integration:** Compatible with Alexa and Google Assistant for hands-free monitoring.
- **Multi-Device Access & User Sharing:** Monitor via smartphone, PC, or tablet. Share access with family and use Privacy Mode.
- **Easy to Carry:** Simple plug-and-play setup with included USB cable and charging plug.

## 4. Setup Guide

Follow these steps to set up your AMOROM C1 Cam:

1. **Power On:** Connect the camera to a power source using the provided USB cable and power adapter. The infrared light will flash once, and the blue indicator light will illuminate.
2. **App Download:** Download the "Amorom" app from your smartphone's app store (iOS or Android).
3. **Account Registration:** Open the app and register for a new account or log in if you already have one.
4. **Add Device:** In the app, select the option to add a new device. Follow the on-screen wizard.
5. **Reset Camera (if needed):** If the blue light is not flashing rapidly after about 50 seconds, long-press the reset button (located on the back of the camera) for approximately 6 seconds until you hear a "Di" beep. The camera will restart, and the blue light will flash rapidly, indicating it's ready for configuration.
6. **Connect to Wi-Fi:** Ensure your smartphone is connected to a 2.4GHz Wi-Fi network. Enter your Wi-Fi password in the app.
7. **Scan QR Code:** The app will generate a QR code. Hold your smartphone approximately 15-20 cm (6-8 inches) in front of the camera lens. Ensure there is no reflective glare on the screen. The camera will scan the QR code.
8. **Confirmation:** Once the camera successfully scans the QR code, you will hear a "Connecting to a network" prompt. Click "I Heard a Prompt" in the app.
9. **Completion:** After a short waiting period (approximately 10 seconds), the camera will be added to your app, and you will hear "Camera online." You can then name your camera and begin monitoring.

### Setup Videos:

Video: Instructions on how to configure the AMOROM C1 Cam with the Amorom app for initial setup.

Video: Guide on how to reset the AMOROM C1 Cam for initial setup or re-configuration.

## 5. Operating Instructions

### 5.1 Live View and Recording

Access the live feed of your camera through the Amorom app on your smartphone, PC, or tablet. The camera supports 24/7 recording, which can be stored on a Micro SD card (up to 128GB, not included) or via optional cloud storage.




Image: The camera provides 24/7 video and audio recording, suitable for various monitoring needs including baby, pet, and security.




Image: The AMOROM C1 Cam supports both local Micro SD card storage (up to 128GB) and optional cloud storage.

## 5.2 Motion and AI Detection

The camera utilizes advanced AI algorithms to detect human movement, pets, vehicles, or packages. When activity is detected, you will receive instant alerts on your Amorom app.




Image: Instant alarm notifications are pushed to your smartphone when motion is detected by the camera.

## 5.3 Two-Way Audio

Use the built-in microphone and speaker to communicate with individuals or pets in the camera's vicinity. This feature allows for real-time interaction.




Image: The two-way audio feature allows you to speak through the camera and hear responses.

## 5.4 Smart Home Integration

The AMOROM C1 Cam is compatible with Amazon Alexa and Google Assistant. You can use voice commands to view live feeds on compatible smart displays like Echo Show or Chromecast.




Image: Voice control allows monitoring via smart assistants like Alexa and Google Assistant.

Video: Demonstrates quick connection and integration with Google Assistant and Amazon Alexa.

## 5.5 Multi-Device Access and Sharing

Monitor your space from multiple devices (smartphone, PC, tablet) and share access with family members through the app. You can also toggle Privacy Mode on/off to control recording when you are home.

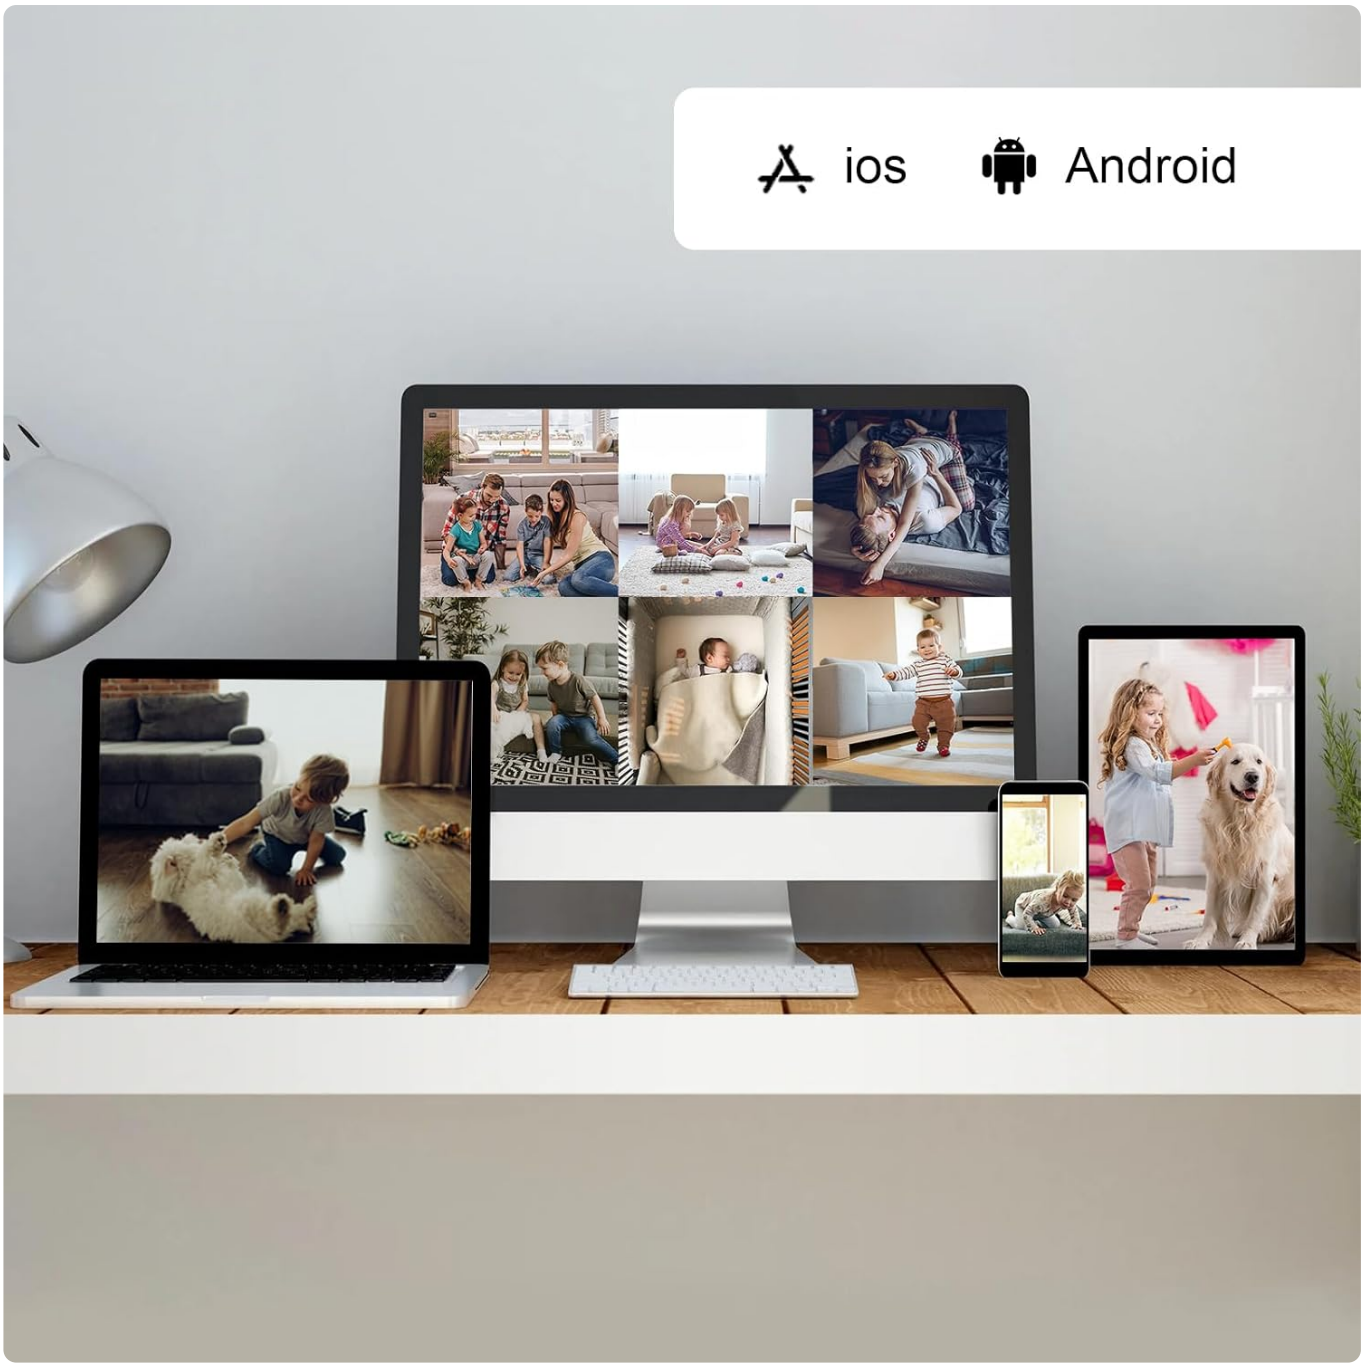



Image: Monitor your cameras from various devices including smartphones, PCs, and tablets.

Video: Demonstrates how to monitor up to 16 cameras simultaneously on one screen using the Amorom app.

## 6. Maintenance

- **Cleaning:** Gently wipe the camera lens and body with a soft, dry cloth. Avoid using liquid cleaners or abrasive materials.
- **Firmware Updates:** Regularly check the Amorom app for available firmware updates to ensure optimal performance and security. Follow the app's instructions for updating.
- **Placement:** Ensure the camera is placed in a stable location, away from direct sunlight, heat sources, and moisture.

## 7. Troubleshooting

If you encounter issues with your AMOROM C1 Cam, refer to the following common solutions:

| Issue | Possible Solution |
|---|---|
| Camera not connecting to Wi-Fi | Ensure your Wi-Fi is 2.4GHz. Verify the Wi-Fi password. Move the camera closer to the router. Reset the camera (refer to Setup Guide, Step 5). |
| No image or poor image quality | Check power connection. Ensure the lens is clean. Verify network stability. Adjust camera placement for better lighting. |
| Motion detection not working | Check motion detection settings in the app. Ensure the camera's field of view is clear. Adjust sensitivity settings. |
| Two-way audio issues | Ensure microphone and speaker permissions are enabled in the app. Check volume settings on your device and in the app. |
| App not receiving alerts | Check app notification settings on your phone and within the Amorom app. Ensure the app is running in the background. |

## 8. Specifications

| Feature | Detail |
|---|---|
| Model Name | AM-C1-02 |
| Indoor/Outdoor Usage | Indoor |
| Compatible Devices | Smartphone, PC, Tablet |
| Power Source | Corded Electric |
| Connectivity Protocol | 2.4G WIFI Network |
| Controller Type | Amazon Alexa, Google Assistant |
| Mounting Type | Floor-Mounted, Wall-mounted, Ceiling-mounted |
| Video Capture Resolution | 1080p |
| Color | White |
| Number of Items | 2 |
| Wireless Communication Technology | Wi-Fi |
| Effective Video Resolution | 2 MP |

| Feature | Detail |
|---|---|
| Viewing Angle | 110 Degrees |
| Night Vision Range | 5 Meters |
| Frame Rate | 15 fps |
| Material | Plastic |
| Voltage | 5 Volts (DC) |
| Wattage | 5 Watt-hours |
| Item dimensions L x W x H | 2.17 x 2.17 x 4.33 inches |
| Item Weight | 10.5 ounces |
| Focus Type | Auto Focus |
| Digital Zoom | Yes |
| Alert Type | Motion Only |
| Light Source Type | Infrared |
| Video Capture Format | MPEG-4 |
| Photo Sensor Technology | CMOS |
| International Protection Rating | IP65 |
| Number of IR LEDs | 6 |
| UPC | 611834324554 |

## 9. Warranty and Support

For warranty information and customer support, please refer to the documentation included with your product or visit the official AMOROM website. You can also contact AMOROM customer service through the Amorom app's "FAQ & Feedback" section.

© 2025 AMOROM. All rights reserved.

### Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the

question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

**Submit question**

---

**Open the live page**

**https://manuals.plus/asin/B0C6K7WB5R**

More documents and user manuals: **https://manuals.plus/**