

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [LIBREFLY](#) /

› [LIBREFLY Clock Camera User Manual](#)

## LIBREFLY S53

# LIBREFLY Clock Camera User Manual

Model: S53

## INTRODUCTION

---

The LIBREFLY Clock Camera is a discreet and versatile security device designed for indoor surveillance. It features Full HD 1080P video recording, enhanced night vision, and motion detection capabilities, all integrated into a functional digital clock. This manual provides comprehensive instructions for setting up, operating, and maintaining your device to ensure optimal performance and security.

## Key Features:

- **Full HD 1080P Resolution:** Delivers sharp, clear images and videos for detailed monitoring.
- **24/7 Live Streaming:** Monitor your space remotely via a user-friendly mobile application.
- **Motion Detection:** Receive instant push notifications and snapshots upon detecting activity.
- **Loop Recording to SD Card:** Ensures continuous surveillance even without Wi-Fi (SD card not included).
- **Enhanced Night Vision:** Equipped with 5 invisible infrared lights for clear footage in low-light conditions.
- **Discreet Design:** Blends seamlessly into any environment as a regular clock.

## WHAT'S IN THE BOX

---


- 1 x LIBREFLY Clock Camera
- 1 x USB Charging Cable

*Note: A Micro SD card (up to 256GB) is required for local storage and is not included.*

## PRODUCT OVERVIEW


---

# Remote Access on your Smartphone

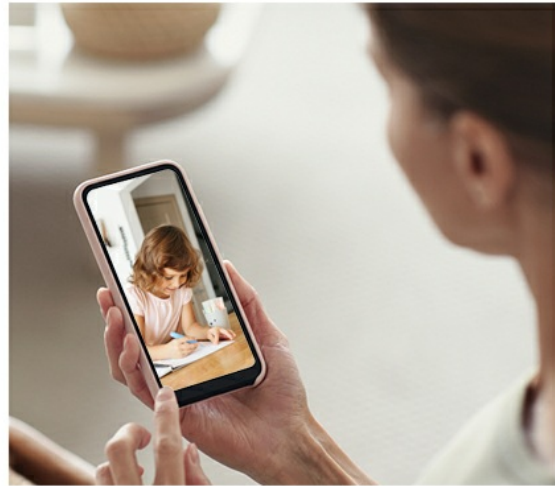

**Crystal-Clear 1080P Hidden Clock Camera:** The device features a hidden camera lens integrated into a functional digital clock, providing high-definition video surveillance.

## AI Motion Detection Alert & Push

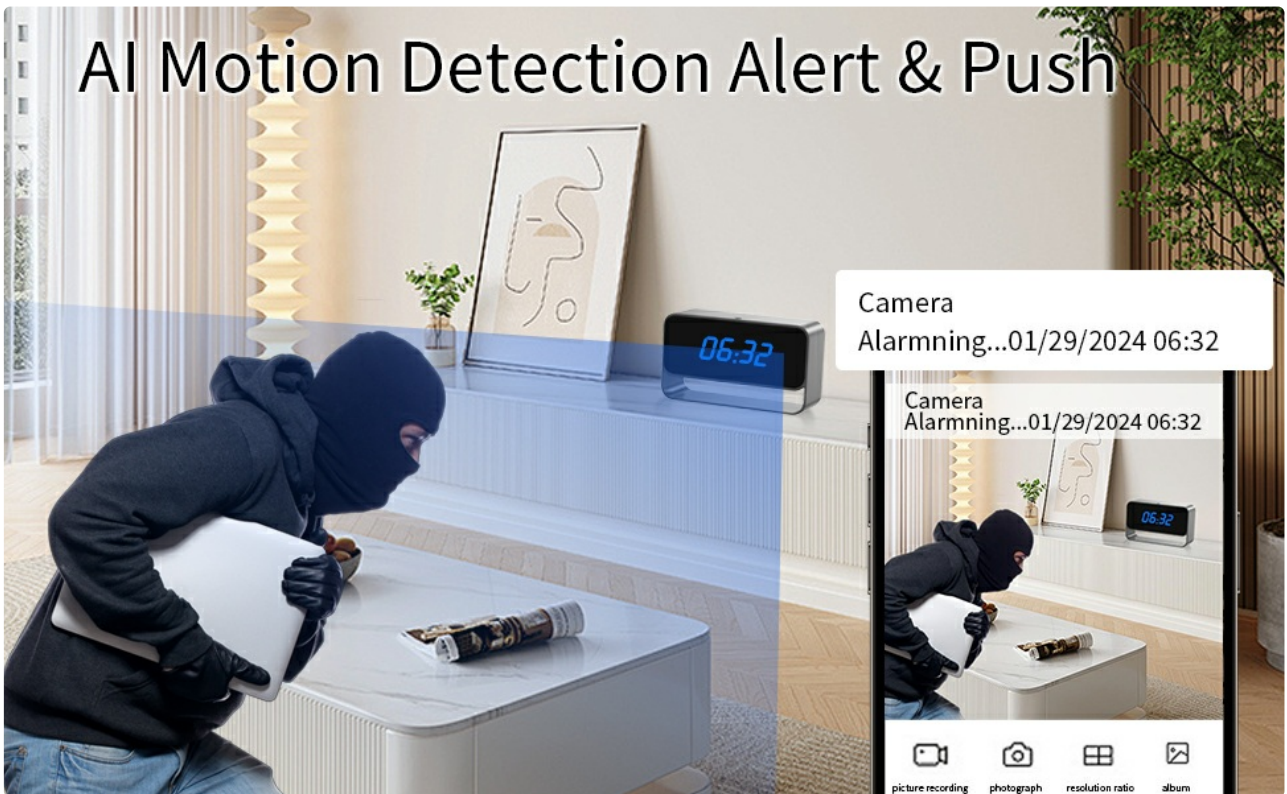

**No-Glow Infrared Night Vision:** The camera is equipped with invisible infrared lights, allowing for clear video capture in complete darkness without emitting any visible light.

# Nursing Home, Babysitters, Offices Monitoring, Home Surveillance



**Smart AI Motion Detection Push & Alert:** The camera can detect motion and send instant alerts and snapshots to your mobile device, ensuring you are notified of any activity.

## 3 WAYS OF CONNECTIONS

### WAY 1: Plug&Play (No WiFi Network)



Micro SD card



### WAY 2: AP Mode(No WiFi Network)




Camera's Hotspot



### WAY 3: Remote Access



Router



**Remote Access for Real-Time Viewing:** Access the camera's live feed from anywhere using the dedicated mobile application on your smartphone.

## SETUP GUIDE

### 1. Initial Charging

Before first use, fully charge the clock camera using the provided USB charging cable. Connect the cable to the camera's

charging port and a standard USB power adapter (not included). The charging indicator light will show the charging status.

## 2. Insert Micro SD Card (Optional)

For local video storage, insert a Micro SD card (up to 256GB, Class 10 or higher recommended) into the designated slot on the camera. Ensure the camera is powered off before inserting or removing the SD card.

## 3. Download and Install the Mobile Application

Search for the official LIBREFLY camera application on your smartphone's app store (iOS App Store or Google Play Store). Download and install the application. Follow the on-screen prompts to create an account if you are a new user.

## 4. Connecting the Camera

The camera supports three connection methods:



*Visual representation of the three connection methods.*

### 1. Way 1: Plug & Play (No WiFi Network):

Insert a Micro SD card. The camera will automatically begin recording to the SD card. You can later retrieve the card and view footage on a computer.

### 2. Way 2: AP Mode (No WiFi Network - Camera's Hotspot):

Power on the camera. On your smartphone, connect to the camera's Wi-Fi hotspot (usually named something like "IPC-XXXXXX"). Once connected, open the app to view live footage within a short range of the camera.

### 3. Way 3: Remote Access (Via Router):

This method allows remote viewing from anywhere.

- a. Ensure your camera is powered on and within range of your Wi-Fi router.
- b. Open the mobile application and follow the in-app instructions to add a new device.
- c. Select the option to connect to your home Wi-Fi network.
- d. Enter your Wi-Fi network name (SSID) and password when prompted.
- e. The camera will attempt to connect to your router. Once connected, the camera's status indicator will change (refer to app for specific indicator behavior).

- f. You can now access the live feed and settings remotely via the app.

## OPERATING INSTRUCTIONS

---

### Live Viewing

Once the camera is connected to your Wi-Fi network (Way 3), open the mobile application. Select your camera from the device list to access the live video feed. You can view real-time footage, take snapshots, and record video directly to your phone.

### Motion Detection Settings

Navigate to the camera settings within the app. Locate the "Motion Detection" or "Alarm Settings" section. Here you can:

- Enable or disable motion detection.
- Adjust motion sensitivity levels.
- Set up push notifications to receive alerts on your phone.
- Configure recording schedules for motion-triggered events.

### Recording and Playback

If an SD card is inserted, the camera will automatically record based on your settings (continuous or motion-triggered). To view recorded footage:

- **Via App:** In the app, go to the camera's playback section. Select the date and time to review recorded videos from the SD card.
- **Directly from SD Card:** Power off the camera, remove the SD card, and insert it into a computer's card reader. Use a compatible media player to view the video files.

### Night Vision

The camera's night vision feature activates automatically in low-light conditions. The 5 invisible infrared lights provide clear black and white video up to 15 feet without emitting a visible glow.

## MAINTENANCE

---

- **Cleaning:** Use a soft, dry cloth to clean the camera lens and the clock display. Do not use liquid cleaners or abrasive materials.
- **Battery Care:** To prolong battery life, avoid exposing the camera to extreme temperatures. Recharge the battery regularly, even if not in constant use.
- **Firmware Updates:** Periodically check the mobile application for any available firmware updates. Keeping the firmware updated ensures optimal performance and access to new features.
- **SD Card Management:** Regularly back up important footage from the SD card. Consider formatting the SD card periodically through the app to maintain its performance and prevent data corruption.

## TROUBLESHOOTING

---

Problem	Possible Cause	Solution
Camera not connecting to Wi-Fi.	Incorrect Wi-Fi password; camera too far from router; router settings (e.g., 5GHz network).	Double-check Wi-Fi password. Move camera closer to the router. Ensure your router broadcasts a 2.4GHz network, as the camera may not support 5GHz. Restart camera and router.

Problem	Possible Cause	Solution
No video recording to SD card.	SD card not inserted correctly; SD card full or corrupted; incorrect recording settings.	Ensure SD card is fully inserted. Check SD card status in the app. Format the SD card via the app. Verify recording settings (e.g., loop recording enabled). Replace SD card if corrupted.
Motion detection alerts not received.	Motion detection disabled; app notifications turned off; poor network connection.	Enable motion detection in the app settings. Check your phone's notification settings for the app. Ensure stable internet connection for both camera and phone.
Poor video quality.	Insufficient lighting; dirty lens; network bandwidth issues.	Ensure adequate lighting or rely on night vision. Clean the camera lens. Check your internet speed and reduce video quality settings in the app if necessary.

If you encounter issues not listed here or require further assistance, please refer to the customer support information in the Warranty & Support section.

## SPECIFICATIONS

Feature	Detail
Model Name	Clock Camera
Model Number	S53
Video Capture Resolution	1080p Full HD
Connectivity Technology	Wireless (Wi-Fi)
Power Source	Battery Powered (5 Volts)
Indoor/Outdoor Usage	Indoor
Mounting Type	Tabletop Mount
Viewing Angle	140 Degrees
Night Vision Range	15 Feet
Number of IR LEDs	5 (Invisible)
Frame Rate	15-20 frames per second
Storage	Micro SD Card (Up to 256GB, not included)
Item Dimensions (L x W x H)	2 x 2 x 2 inches
Item Weight	8.8 ounces (0.25 Kilograms)
Batteries	1 Lithium Polymer battery required (included)
Control Method	App

Feature	Detail
Alert Type	Motion Only

## WARRANTY & SUPPORT

---

LIBREFLY is committed to customer satisfaction. Your LIBREFLY Clock Camera comes with:

- **30-Day Money-Back Guarantee:** If you are not satisfied with your purchase, you may return it within 30 days for a full refund.
- **180-Day Free Replacement Policy:** In case of any manufacturing defects or malfunctions within 180 days of purchase, you are eligible for a free replacement.

For technical support, warranty claims, or any inquiries, please contact LIBREFLY customer service through the contact information provided with your product packaging or on the official LIBREFLY website. Please have your model number (S53) and purchase details ready when contacting support.