ANNKE N44WET0-72GK-V2-OP

ANNKE Wireless Security Camera System User Manual

Model: N44WET0-72GK-V2-OP

Introduction

This manual provides detailed instructions for the installation, operation, and maintenance of your ANNKE Wireless Security Camera System. This system features a 7-inch LCD monitor, 4-channel WiFi surveillance capabilities, and two 3MP outdoor IP cameras with night vision and two-way audio. Please read this manual thoroughly before using the product to ensure proper setup and optimal performance.

Package Contents

Before beginning installation, verify that all components are present in the package:

- 1 x 7-inch Touch Screen NVR
- 2 x Security Cameras (3MP Outdoor IP Cameras)
- 1 x NVR Power Adapter
- 2 x IP Cameras' Power Adapters
- 1 x Quick Start Guide
- 2 x Surveillance Signs
- 1 x Screw Pack
- 1 x 64GB SD Card



Image: The ANNKE Wireless Security Camera System, showing the 7-inch LCD monitor, two outdoor IP cameras, and a 64GB SD card. This image represents the main components included in the package.

Image: A detailed diagram illustrating the contents of the ANNKE Wireless Security Camera System box, including the NVR, cameras, power adapters, quick start guide, surveillance signs, screw pack, and 64GB SD card.

Setup

1. Initial Power-Up and Connection

1. Connect the NVR power adapter to the NVR and plug it into a power outlet.
2. Connect the IP camera power adapters to each camera and plug them into power outlets.
3. The cameras and NVR are designed for automatic pairing. Once powered on, the cameras should automatically connect to the NVR's 7-inch display.



Image: A visual representation highlighting the easy setup process of the ANNKE system, showing a single camera and the NVR monitor connected to power outlets, contrasting with a more complex wired DVR setup.



Image: The ANNKE Wireless Security Camera System, showcasing the compact 7-inch monitor and two wireless cameras, emphasizing its ease of installation compared to traditional wired systems.

2. SD Card Installation

The system includes a 64GB SD card for local storage. Insert the SD card into the designated slot on the NVR. The system supports up to 256GB for extended recording.



Image: The ANNKE Wireless Security Camera System, illustrating the local storage capability with an SD card, allowing for week-long recording of events.

3. Camera Placement

Position the cameras in desired outdoor locations, ensuring they have a clear line of sight to the areas you wish to monitor. Mount them securely using the provided screw pack. Ensure cameras are within range of the NVR's Wi-Fi signal.

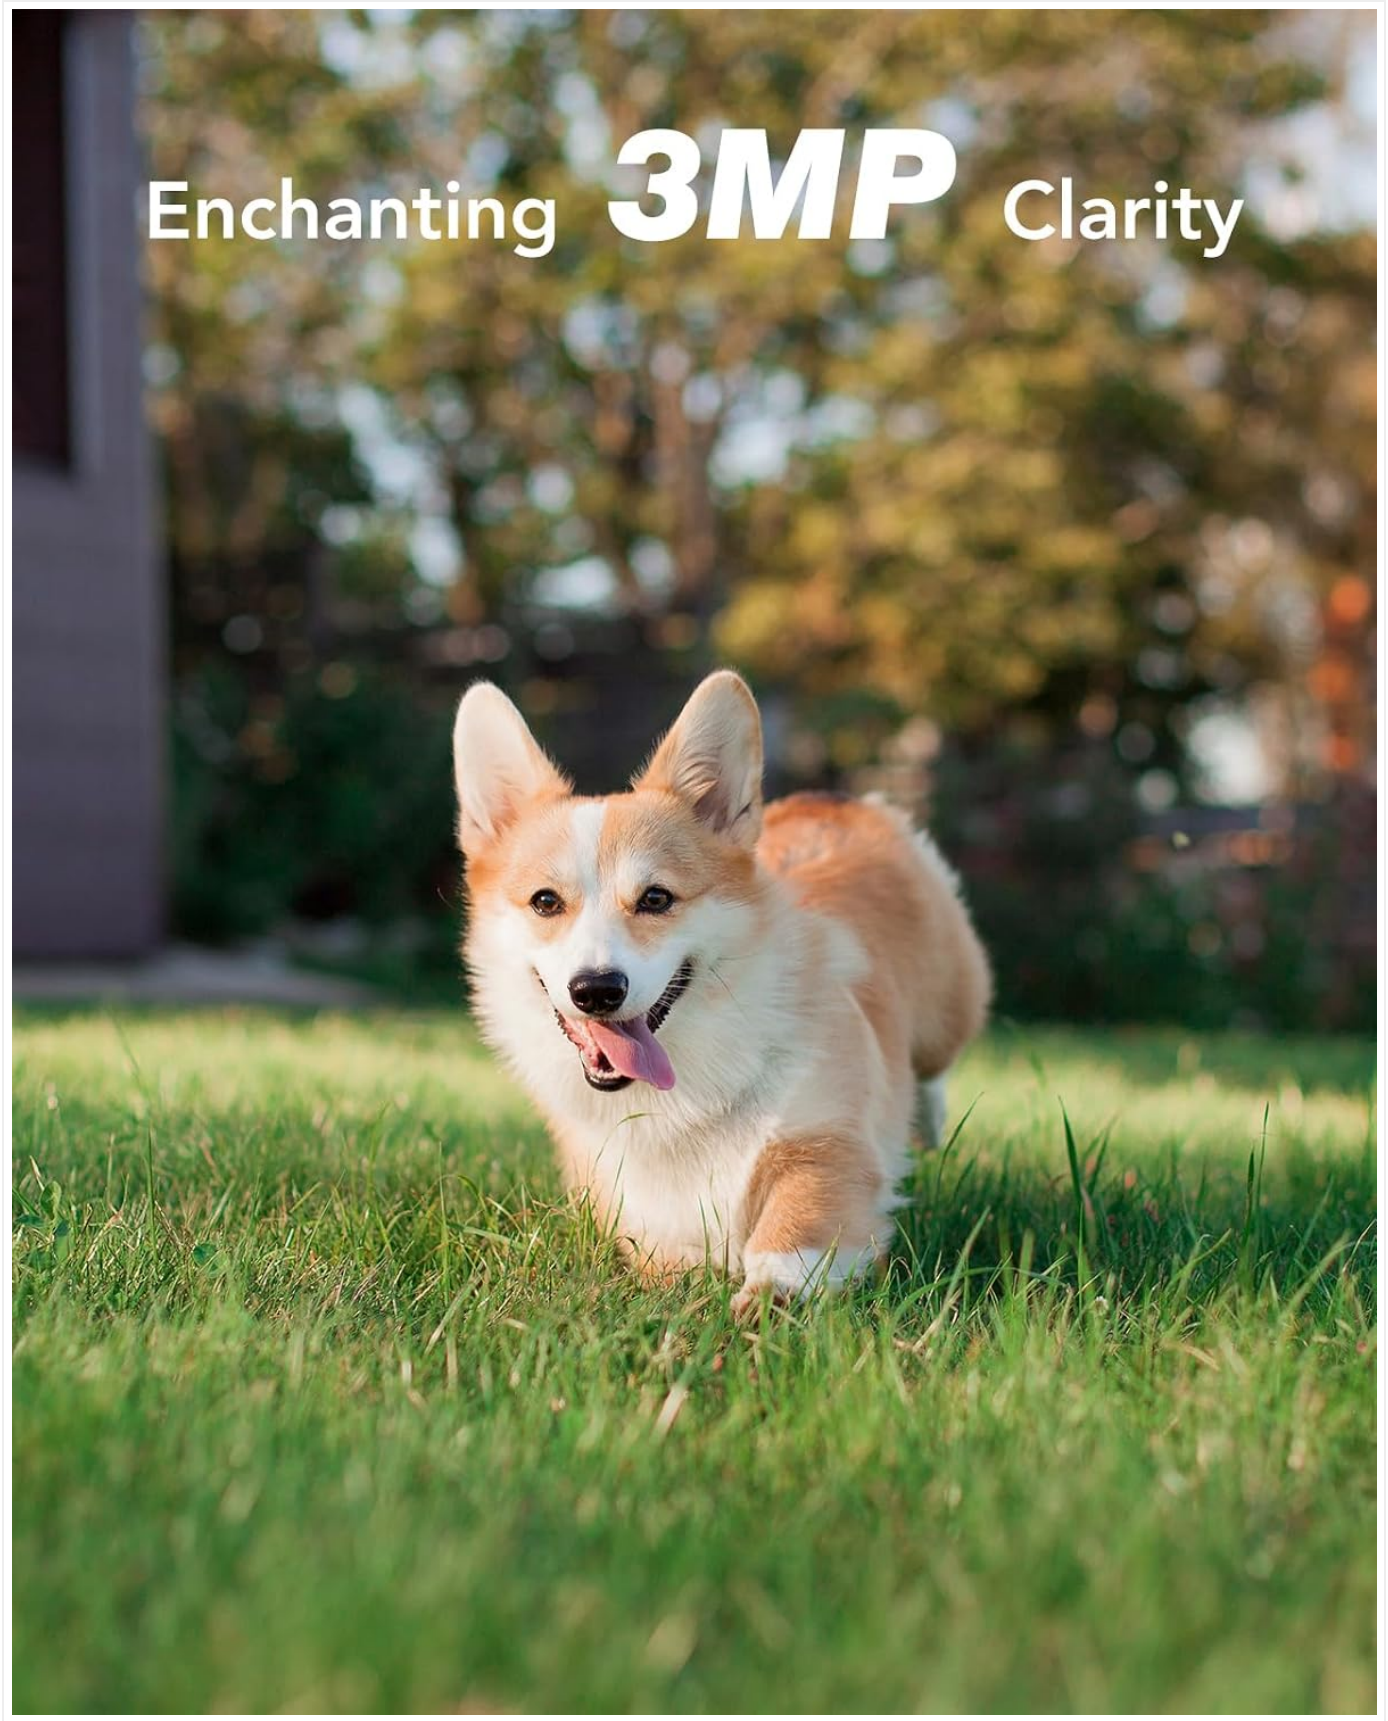


Image: A close-up of an ANNKE 3MP Wi-Fi camera capturing a clear image of a dog in a garden, demonstrating the camera's high-resolution capabilities.

Operating Instructions

1. Using the 7-inch Touch Screen NVR

The 7-inch IPS touch screen allows for intuitive control and monitoring. Tap the screen to access menus and settings. You

can view live feeds from all connected cameras simultaneously or select a single camera for a larger view.

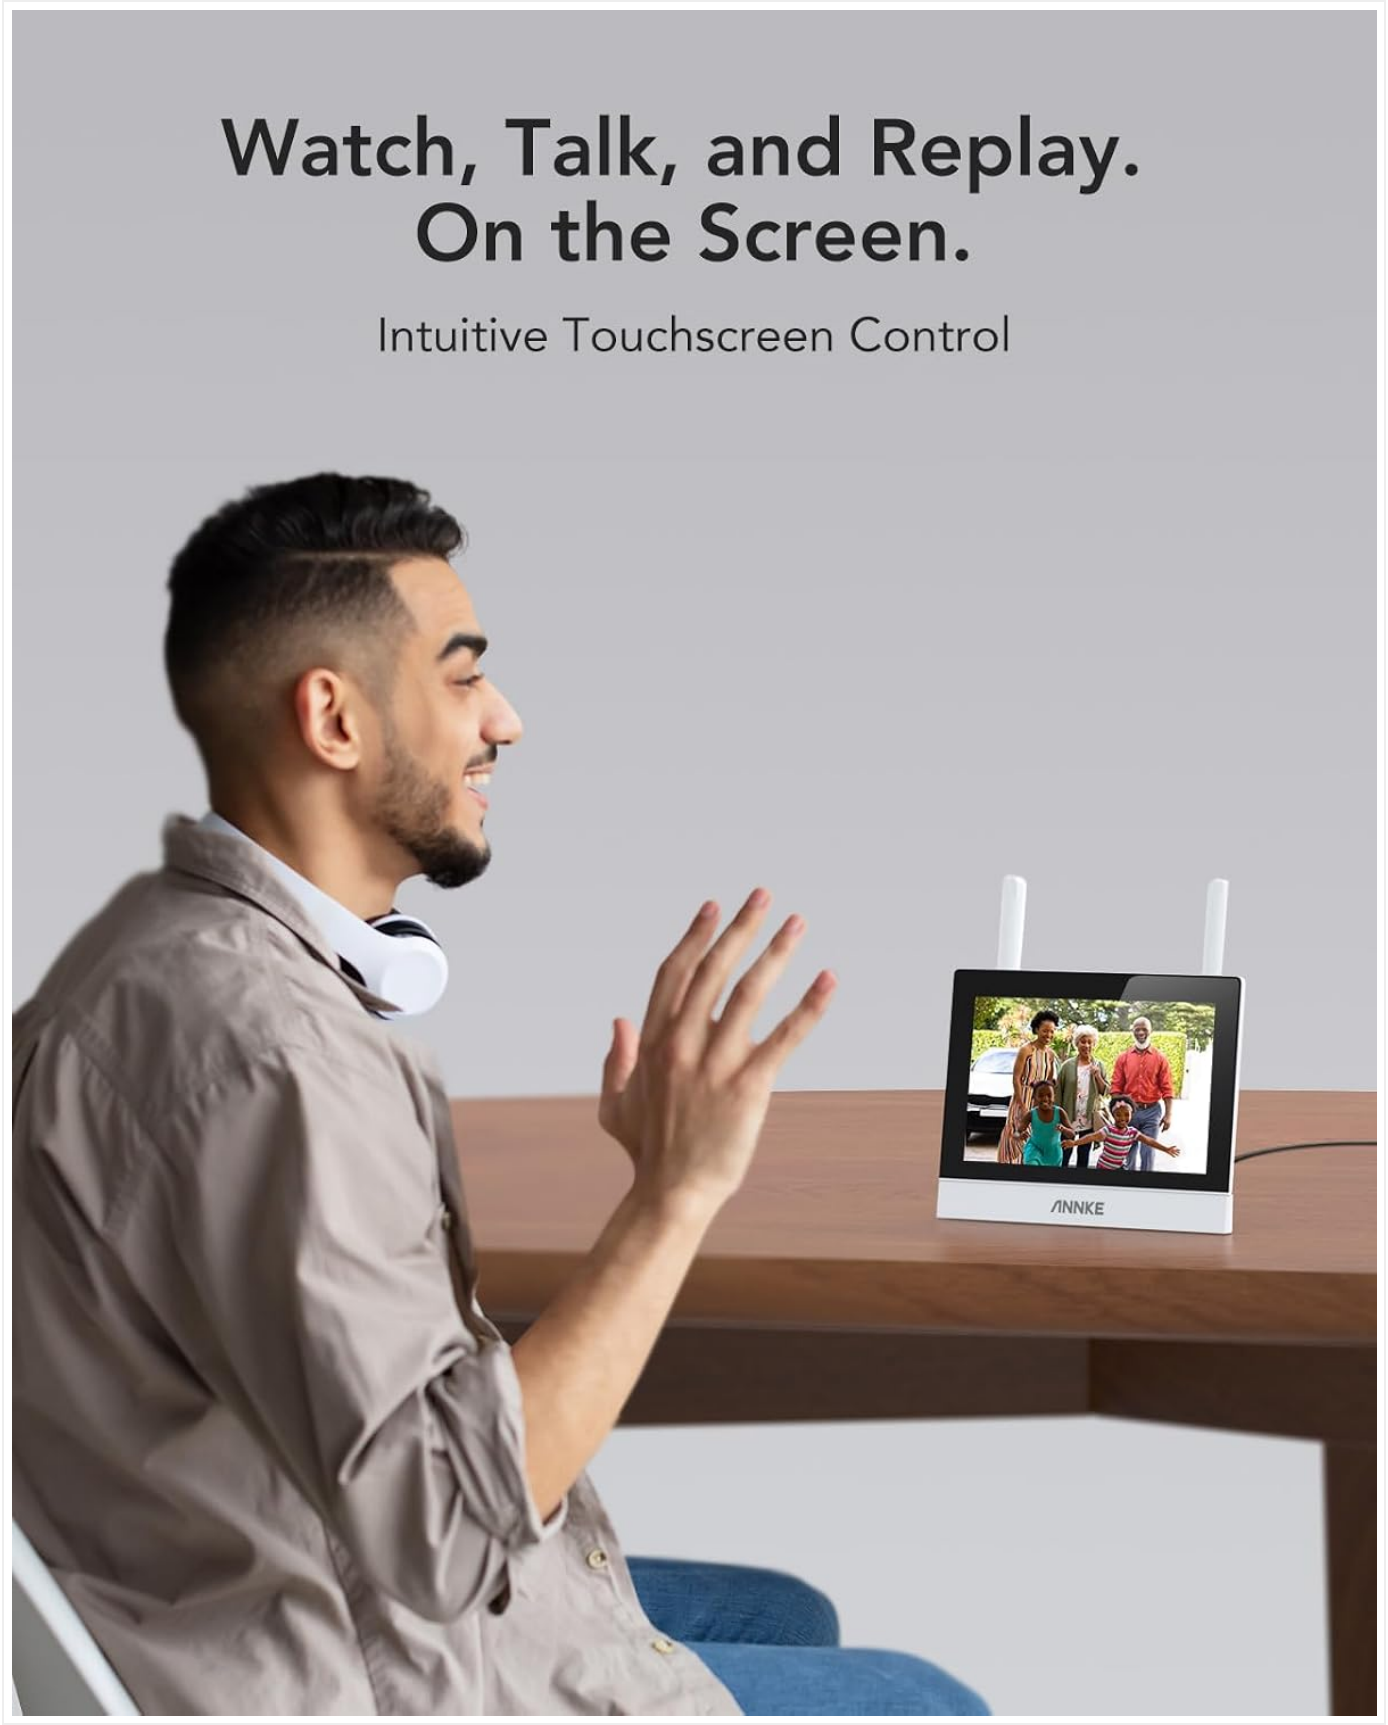


Image: A man interacting with the ANNKE 7-inch touchscreen NVR, demonstrating the intuitive touch control for watching, talking, and replaying surveillance footage.

2. Two-Way Audio

The cameras feature built-in microphones and speakers, enabling two-way audio communication. Access this feature through the NVR's touch screen to speak to visitors or deter intruders.

3. Motion Detection and Alerts

The system is equipped with smart human detection to minimize false alarms. When motion is detected, the NVR will display a zoom-in notification. You can also configure the system to send app push notifications and email alerts to your connected devices.

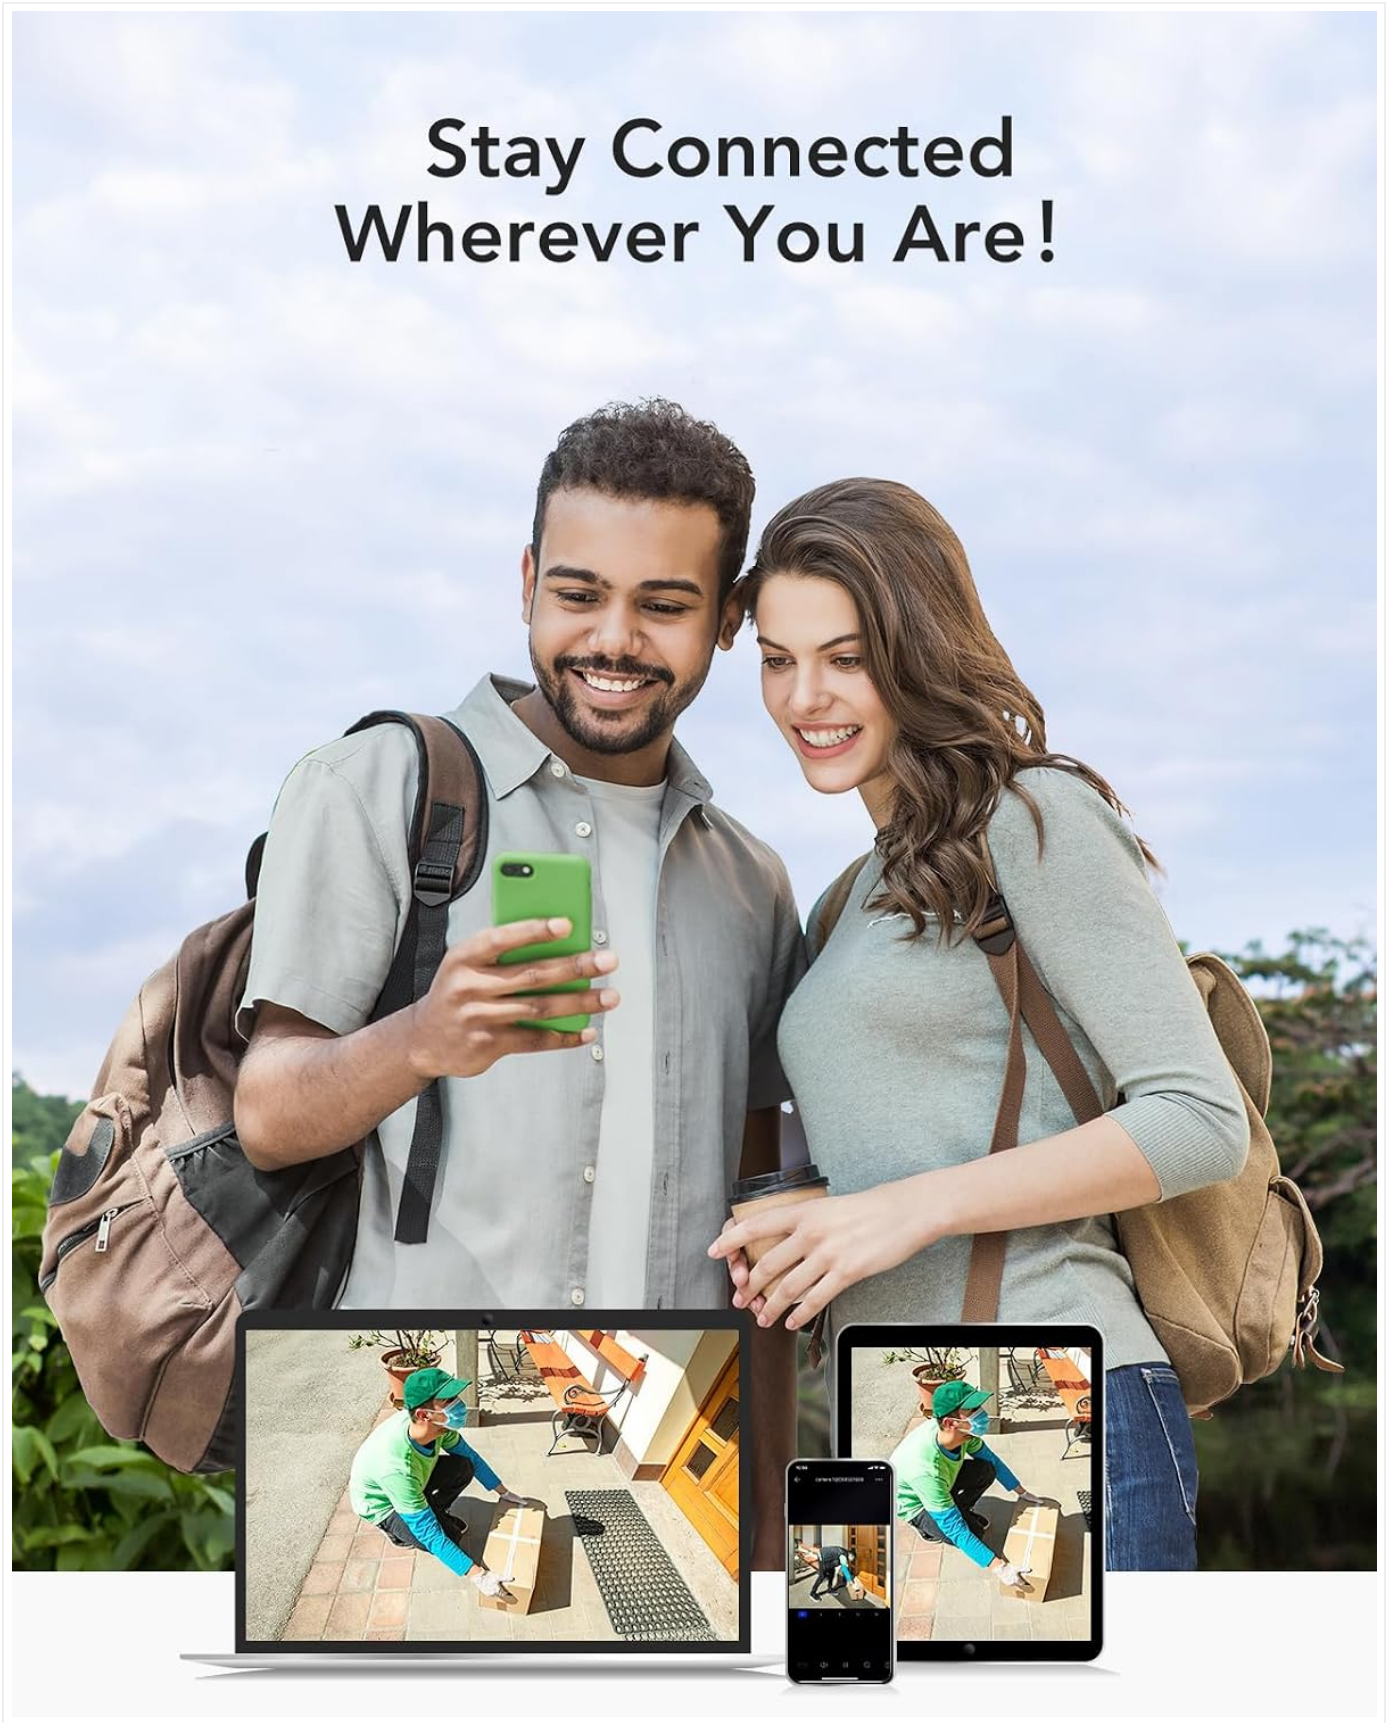


Image: A couple viewing the ANNKE security camera feed on their mobile phone and laptop, illustrating the remote access capabilities of the system.

4. Remote Access (ANNKE Vision App)

To view camera feeds remotely, connect the NVR to your home network via an Ethernet cable. Download the ANNKE Vision app on your smartphone or tablet, create an account, and add your device by scanning the QR code found in the NVR's network settings. This allows you to monitor your property from anywhere.

5. Recording and Playback

Recordings are stored on the installed SD card. You can set the system for continuous recording or motion-activated recording. To review footage, navigate to the playback menu on the NVR's touch screen. Files can also be transferred using the convenient USB port.



Image: The ANNKE 7-inch NVR monitor displaying a live camera feed, with an overlay indicating privacy zones, demonstrating the ability to customize recording areas.

6. Night Vision

The 3MP cameras provide clear infrared night vision up to 100ft, ensuring continuous surveillance even in complete darkness.



Image: A split image demonstrating the clarity of the ANNKE camera's vision, showing a cat in daylight on one side and the same cat in infrared night vision on the other.

Maintenance

- **Cleaning:** Regularly wipe the camera lenses and NVR screen with a soft, dry cloth to ensure clear image quality. Avoid abrasive cleaners.
- **Firmware Updates:** Check the ANNKE website or the ANNKE Vision app periodically for firmware updates to ensure optimal performance and security.
- **Storage Management:** Periodically review recorded footage and delete unnecessary files to manage storage space on the SD card. The system will automatically overwrite the oldest footage when the card is full, but manual management can prevent loss of important events.
- **Power Supply:** Ensure all power adapters are securely connected and not damaged. Use only the provided power adapters.

Troubleshooting

Problem	Possible Cause	Solution
No image on NVR screen.	NVR not powered on; camera not powered on; camera out of range; camera not paired.	Check power connections for NVR and cameras. Ensure cameras are within Wi-Fi range. If issues persist, refer to the quick start guide for manual pairing instructions.
No remote viewing via app.	NVR not connected to internet; incorrect app settings; firewall issues.	Ensure NVR is connected to your router via Ethernet. Verify app settings and device addition. Check router firewall settings.
Poor image quality.	Dirty lens; low light conditions; camera too far from subject.	Clean camera lens. Ensure adequate lighting or rely on night vision. Reposition camera closer to the area of interest.

Problem	Possible Cause	Solution
Two-way audio not working.	Microphone/speaker disabled; volume too low; network interference.	Check audio settings on the NVR. Adjust volume levels. Ensure stable Wi-Fi connection.
SD card not recording.	SD card full; card not formatted; card faulty.	Check SD card capacity. Format the SD card via NVR settings. Replace SD card if faulty.

Specifications

- **Model:** N44WET0-72GK-V2-OP
- **NVR Display:** 7-inch IPS Touch Screen
- **Camera Resolution:** 3MP (2304 x 1296)
- **Night Vision Range:** Up to 100ft (30m)
- **Audio:** Two-Way Audio (Built-in Microphone & Speaker)
- **Storage:** 64GB SD Card included (Supports up to 256GB)
- **Connectivity:** Wireless (Wi-Fi), Ethernet for NVR remote access
- **Power Source:** Corded Electric (12 Volts)
- **Special Features:** Smart Human Detection, Instant Alerts (App Push, Email), Privacy Masking, H.264+ Video Compression
- **Dimensions:** 10 x 20 x 5 cm (NVR)
- **Weight:** 1.5 kg (NVR)

Warranty and Support

ANNKE products typically come with a manufacturer's warranty. Please refer to the warranty card included in your package or visit the official ANNKE website for detailed warranty terms and conditions. For technical support, product inquiries, or assistance with troubleshooting, please contact ANNKE customer service through their official support channels. Information regarding support can usually be found on the ANNKE website or in the Quick Start Guide.
Online Resources:

- ANNKE Official Support Page
- Firmware and Software Downloads

© 2024 ANNKE. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question