

MOD LIGHTING MOD018-GD-B-WW

MOD LIGHTING Jewels & Pearls Pendant Light Fixture User Manual

Model: MOD018-GD-B-WW

INTRODUCTION

Thank you for choosing the MOD LIGHTING Jewels & Pearls Pendant Light Fixture. This manual provides essential information for the safe and efficient installation, operation, and maintenance of your new lighting fixture. Please read this manual thoroughly before installation and retain it for future reference.

Product Features

- **Ideal for Any Space:** Suitable for kitchens, kitchen islands, bedrooms, dining rooms, cafes, restaurants, and offices.
- **Durable Construction:** Made with high-quality aluminum and glass for longevity.
- **Dimmable LED Bulb Included:** Comes with a 12W, E26 LED bulb (3000K Warm White) compatible with standard dimmer switches.
- **Adjustable Hanging Wire:** Up to 47.2 inches (120 cm) to fit various ceiling heights.
- **Easy Installation:** Designed for straightforward hardwiring with minimal assembly.
- **Certifications:** CCC, ROHS, CE Certified for safety and quality.

SAFETY INFORMATION

WARNING: Always turn off the power at the main circuit breaker before beginning any electrical installation.

- Ensure all electrical connections comply with local codes and ordinances, as well as the National Electric Code (NEC).
- If you are unsure about electrical installations, consult a qualified electrician.
- Do not exceed the specified wattage for the bulb.
- Handle glass components with care to prevent breakage.
- Keep packaging materials away from children.

PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation.

- Pendant Light Fixture (1 unit)
- 12W E26 Dimmable LED Bulb (1 unit)
- Mounting Hardware Kit (including mounting bracket, screws, wire nuts)
- Instruction Manual



Image: Overview of included components for the pendant light fixture.

SETUP AND INSTALLATION

Follow these steps carefully for proper installation. Professional installation is recommended if you are not familiar with electrical wiring.

Tools Required (Not Included):

- Phillips Head Screwdriver
- Wire Strippers
- Electrical Tape
- Drill (if new holes are needed)

- Ladder

Installation Steps:

1. **Turn Off Power:** Before starting, ensure the power supply to the installation area is turned off at the circuit breaker.
2. **Prepare Mounting Bracket:** Attach the mounting bracket to the junction box in the ceiling using the provided screws. Ensure it is securely fastened.



Image: Step-by-step installation diagram for the pendant light.

3. **Adjust Hanging Length:** The pendant light features an adjustable hanging wire. Loosen the set screw on the canopy to adjust the cable length to your desired height (up to 47.2 inches / 120 cm). Tighten the set screw once the desired length is achieved.



Image: The pendant light highlighting its adjustable hanging length and dimmer compatibility.

4. **Wire Connections:** Connect the fixture's wires to the corresponding wires from the junction box using wire nuts. Connect the live (black) wire to the live wire, the neutral (white) wire to the neutral wire, and the ground (green or bare copper) wire to the ground wire. Secure connections with electrical tape.
5. **Mount Fixture:** Carefully push the fixture's canopy up to the ceiling, aligning the holes with the mounting bracket. Secure the canopy with the provided screws.
6. **Install Bulb:** Screw the included 12W E26 LED bulb into the socket.
7. **Restore Power:** Turn the power back on at the main circuit breaker.

OPERATING INSTRUCTIONS

The MOD LIGHTING Jewels & Pearls Pendant Light Fixture is designed for simple operation.

- **Turning On/Off:** Use your standard wall switch to turn the light fixture on or off.
- **Dimming Function:** If connected to a compatible dimmer switch, adjust the dimmer to control the

brightness of the light. The included LED bulb is dimmable.

- **Light Color Temperature:** The included bulb provides a Warm White (3000K) light, ideal for creating an inviting ambient glow.



Image: Illustration of Warm White (3000K) and Cool White (6000K) light options, though this model comes with 3000K.

MAINTENANCE

Regular maintenance will help prolong the life and appearance of your light fixture.

- **Cleaning:** Turn off the power before cleaning. Use a soft, dry cloth to wipe down the fixture. Do not use abrasive cleaners or solvents, as they may damage the finish.
- **Bulb Replacement:** Ensure the power is off and the bulb has cooled before attempting to replace it. Use only E26 base LED bulbs, preferably dimmable, to maintain compatibility and performance.
- **Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

TROUBLESHOOTING

If you encounter issues with your light fixture, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power supply; Loose wiring; Faulty bulb.	Check circuit breaker; Verify wire connections (power off); Replace bulb.
Light flickers.	Loose bulb; Incompatible dimmer switch; Loose wiring.	Tighten bulb; Ensure dimmer is LED compatible; Check wire connections (power off).
Light is too dim or too bright.	Dimmer setting; Incorrect bulb wattage.	Adjust dimmer; Ensure correct bulb wattage is used.

If the problem persists after trying these solutions, please contact MOD LIGHTING customer support.

SPECIFICATIONS

Brand	MOD LIGHTING
Model Name	Jewels & Pearls
Model Number	MOD018-GD-B-WW
Color	Gold (Oval)
Material	Glass, Iron
Product Dimensions	8"L x 6"W x 16"H (20.32 cm L x 15.24 cm W x 40.64 cm H)
Adjustable Hanging Wire	Up to 47.2 inches (120 cm)
Light Source Type	LED
Wattage	12 Watts
Brightness	1000 Lumens
Color Temperature	3000 Kelvin (Warm White)
Bulb Base	E26
Voltage	120 Volts (AC)
Certifications	CCC, ROHS, CE
Item Weight	3.04 pounds (1.38 kg)
UPC	810143080247

WARRANTY AND SUPPORT

MOD LIGHTING stands behind the quality of its products.

- **Product Warranty:** This product comes with a 1-year product warranty.
- **After-Sale Support:** Lifetime after-sale support is provided.
- **Contact Support:** For any installation questions or support needs, please contact MOD LIGHTING customer service. Refer to the product packaging or the MOD LIGHTING website for contact details.

ADDITIONAL INFORMATION

Product Application Examples



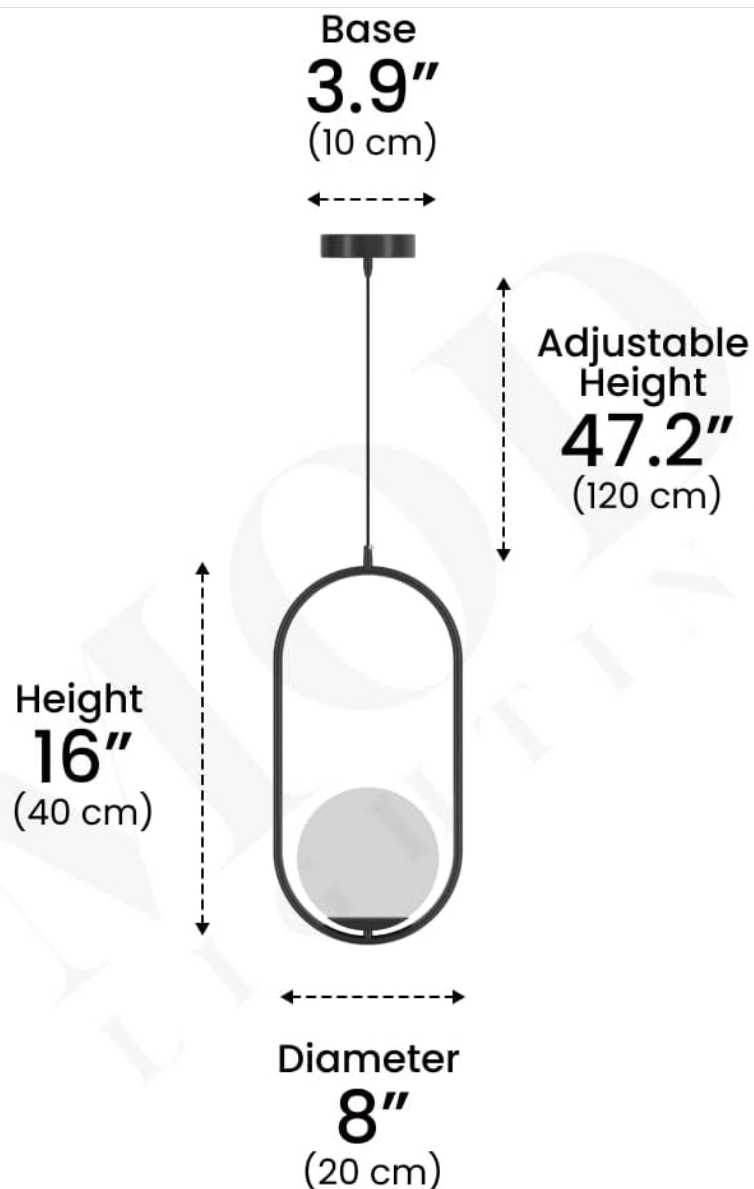
Image: Pendant light used in a dining room.



Image: Pendant light used in a bedroom.

- Adjustable Hanging Length
- Dimmer Switch Compatible
- Choose from 2 Color Temp

Image: Pendant light used in a living room.









Style B

Image: Pendant light used in a commercial space.

Product Video Overview

No official seller videos are available for this product in the provided data.

	<p>Luna Modern Wall Lamp Installation Guide by MOD LIGHTING</p> <p>Comprehensive installation guide for the Luna Modern Wall Lamp by MOD LIGHTING, detailing step-by-step assembly, wiring, and important safety notes for a successful setup.</p>
	<p>Haylen LED Wall Light Installation Guide - MOD LIGHTING</p> <p>Comprehensive installation guide for the MOD LIGHTING Haylen LED Wall Light (Model MOD000). Follow these step-by-step instructions for safe and proper mounting, wiring, and fixture attachment.</p>
	<p>MOD LIGHTING Spiral Ceiling Light Installation Guide</p> <p>Step-by-step installation guide for the MOD LIGHTING Spiral Modern Ceiling Light, covering mounting, wiring, and important safety notes. Includes contact information for support.</p>
	<p>Jewels & Pearls Nordic Pendant Light by MOD LIGHTING - Product Specifications</p> <p>Explore the Jewels & Pearls Nordic Pendant Light collection from MOD LIGHTING. Discover detailed specifications, dimensions, and features for each style (A-E) in Black Ash and Metallic Gold finishes.</p>
	<p>Avery Modern Pendant Light MOD Lighting</p> <p>Discover the Avery Modern Pendant Light by MOD Lighting. Featuring a mid-century design, brushed brass or matte black finish, adjustable height, and E26 LED compatibility. Perfect for bedrooms, living rooms, and kitchen islands.</p>
	<p>Wavey Minimalist Pendant Light by MOD Lighting - Specifications and Features</p> <p>Detailed specifications and features for the Wavey Minimalist Pendant Light by MOD Lighting, available in Small, Medium, and Large sizes. Features include a modern design, adjustable hanging length, and premium aluminum material.</p>