Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

iDealBed 6iKD

iDealBed 6i Custom Adjustable Bed Base User Manual

Model: 6iKD (California King)

1. Product Overview

The iDealBed 6i Custom Adjustable Bed Base offers advanced features for personalized comfort and support. This manual provides essential information for safe setup, operation, and maintenance of your adjustable bed base.

Key Features:

- **Pillow Tilt:** Independently controlled neck support with an additional 20° adjustment.
- **Sonic Massage:** Vibration with 7 intensity levels, 3 modes, and 10, 20, or 30-minute timers.
- **Wall-hugger Design:** Frame slides back as the head section raises, keeping you closer to bedside tables.
- **Bluetooth Connectivity:** Control settings via the free iDealBed app on your wireless device.
- **USB Ports:** USB-A and USB-C ports located on each side of the frame for charging devices.
- **Zero Clearance:** Designed for use with or without legs, suitable for platform beds or flat surfaces.
- **Preset Positions:** Includes Zero Gravity, Anti Snore, and TV presets for one-touch adjustment.
- **Memory Presets:** Two customizable memory positions.
- **Under Bed Light:** LED illumination beneath the frame.
- **Wireless Remote:** Backlit push buttons and built-in flashlight.
- **Voice Command:** Hands-free control capability.
- **High Lift Capacity:** 1,000 lb. lift capacity powered by iDealBed Dual Silent Drive Alpha II motors.
- **Multi-Height Legs:** Includes 8", 3", and 2" sections for adjustable frame height.
- **Emergency Backup Battery:** Provides power during outages (requires 9V battery).

2. Important Safety Information

Please read all instructions carefully before assembly and use. Failure to follow these instructions may result in injury or damage to the product.

- **Weight Capacity:** Do not exceed the maximum weight capacity of 1,000 lbs. This includes the mattress and occupants.
- **Moving Parts:** Be cautious of moving parts during operation. Keep hands, feet, and pets clear of the mechanism.
- **Sharp Edges:** Exercise care around sharp edges during assembly and handling.
- **Children and Pets:** Do not allow children or pets to play on or under the bed base.
- **Electrical Safety:** Ensure all electrical connections are secure and follow local electrical codes. Do not operate the bed

base if the power cord is damaged.

- **Medical Devices:** Consult your physician before using this product if you have a pacemaker or similar medical device, as the massage function may interfere with its operation.
- **Emergency Stop:** In case of emergency, unplug the power cord from the wall outlet.

3. Setup and Assembly

The iDealBed 6i is designed for straightforward assembly. It is recommended that two people assemble the California King size due to its weight.

3.1 Unpacking

- Carefully remove all components from the packaging.
- Place the bed base frame on a clean, flat surface.
- Verify all parts are present according to the included installation manual.

3.2 Leg Installation

The bed base includes multi-height legs (8", 3", and 2" sections) allowing you to customize the bed height.

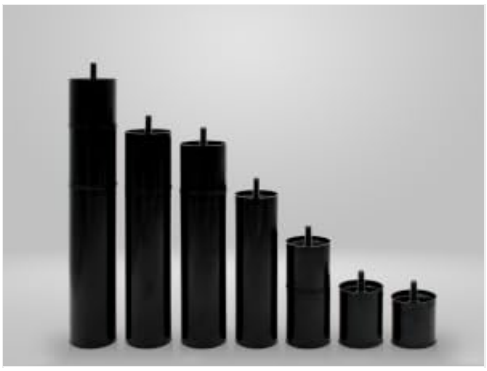

Image: Various leg sections (8", 3", 2") that can be combined to achieve desired bed height.

1. Determine your desired bed height by combining the leg sections.
2. Screw the assembled legs securely into the designated threaded receivers on the underside of the bed frame.

3.3 Power Connection

1. Connect the power cord to the control box located under the bed base.
2. Plug the power cord into a grounded electrical outlet. Ensure the power cord is not pinched or obstructed by moving parts.
3. Install the 9V battery into the emergency backup battery compartment.

3.4 Remote Pairing

If the remote control does not operate the bed base after initial setup, it may need to be paired.

1. Locate the flat/pair blue button on the power cord or control box. Press this button.
2. While the button is pressed, simultaneously hold down the **FOOT UP** and **HEAD UP** buttons on the wireless remote.
3. You will hear a beep, indicating successful pairing. Release the buttons.

3.5 Zero Clearance Option



Image: The bed base shown without legs, indicating its zero clearance capability for direct placement on a platform.

The iDealBed 6i can be used without legs by placing it directly on a platform bed or any flat, sturdy surface. Ensure the surface can support the combined weight of the bed base, mattress, and occupants.

4. Operating Instructions

Your iDealBed 6i adjustable bed base can be controlled using the wireless remote, the iDealBed app, or voice commands.

4.1 Wireless Remote Control



Image: The wireless remote control for the iDealBed 6i, showing various buttons for head, foot, and pillow tilt adjustments, massage, and preset positions.

- **HEAD UP/DOWN:** Adjusts the head section of the bed.
- **FOOT UP/DOWN:** Adjusts the foot section of the bed.
- **TILT HEAD UP/DOWN:** Adjusts the pillow tilt section for neck support.
- **FLAT:** Returns the bed to a completely flat position.
- **ZG (Zero Gravity):** Activates the Zero Gravity preset position.
- **ANTI SNORE:** Activates the Anti Snore preset position.

- **TV:** Activates the TV preset position.
- **M1/M2 (Memory Presets):** Press to recall saved custom positions. To save a position, adjust the bed to your desired setting, then press and hold M1 or M2 until the bed beeps.
- **MASSAGE (HEAD/FOOT):** Activates the head or foot massage zones.
- **MODE:** Cycles through 3 massage modes.
- **TIMER/ALL OFF:** Sets massage timer (10, 20, 30 minutes) or turns off all massage functions.
- **UNDER BED LIGHT:** Turns the under-bed LED light on or off.
- **FLASHLIGHT:** Activates the built-in flashlight on the remote.

4.2 Bluetooth App Control



Image: A smartphone displaying the iDealBed application, used for controlling the adjustable bed base via Bluetooth.

Download the free iDealBed app from your device's app store. Follow the in-app instructions to connect your smartphone or tablet to the bed base via Bluetooth for additional control options.

4.3 Voice Command

The iDealBed 6i supports voice commands for hands-free operation. Refer to the iDealBed app or the full installation manual for specific voice commands and setup instructions.

4.4 USB Charging Ports

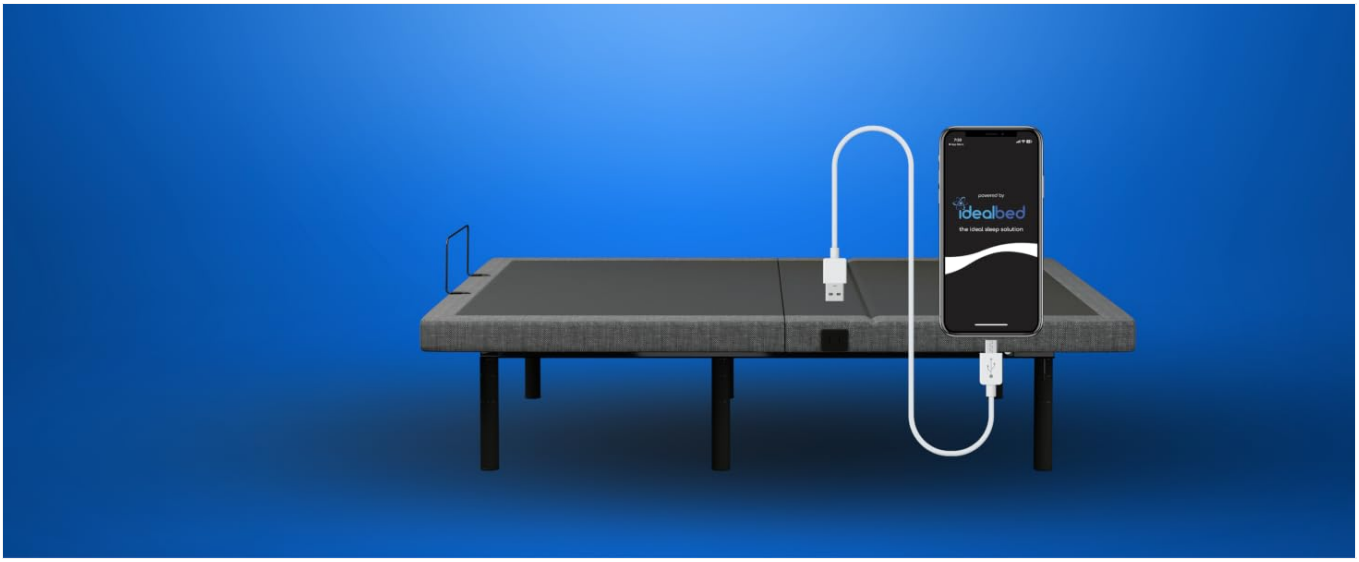

Image: A detailed view of the USB-A and USB-C charging ports integrated into the side of the adjustable bed base.

Two USB ports (USB-A and USB-C) are located on each side of the bed base. Use these ports to charge your wireless devices.

4.5 Wall-hugger Function



Image: The iDealBed 6i adjustable bed base with its head section raised, illustrating how the frame shifts backward to maintain proximity to a wall or nightstand.

When the head section of the bed is raised, the Wall-hugger mechanism automatically slides the entire frame backward, ensuring your bedside essentials remain within easy reach.

5. Care and Maintenance

Proper care and maintenance will extend the life of your iDealBed 6i adjustable bed base.

- **Cleaning:** For fabric components, dry clean only. For the metal frame, wipe with a damp cloth and mild detergent. Avoid harsh chemicals or abrasive cleaners.
- **Remote Batteries:** The wireless remote requires 2 AAA batteries (included). Replace batteries when the remote's performance diminishes.
- **Emergency Backup Battery:** The 9V emergency backup battery should be checked periodically and replaced as needed to ensure functionality during a power outage.
- **Inspections:** Periodically check all connections and fasteners to ensure they are secure.

6. Troubleshooting Guide

If you experience issues with your iDealBed 6i, refer to the following common solutions before contacting customer support.

Problem	Possible Cause	Solution
Bed base does not operate.	No power, loose connection, remote not paired.	• Ensure power cord is securely plugged into a working outlet. • Check all connections to the control box. • Re-pair the remote control (see Section 3.4). • Check the green light on the power cord; if off, check the outlet or cord.
Remote control is unresponsive.	Dead batteries, remote out of range, interference.	• Replace AAA batteries in the remote. • Ensure you are within range of the bed base. • Re-pair the remote control (see Section 3.4).

Problem	Possible Cause	Solution
Massage function not working.	Massage motor disconnected, timer active.	• Check connections to massage motors under the bed. • Ensure the massage timer has not expired.
Bed base makes unusual noises.	Loose components, obstruction.	• Inspect for any loose bolts or nuts and tighten them. • Check for any objects obstructing the moving parts of the bed base.

7. Product Specifications

Feature	Detail
Model Number	6iKD
Size	California King
Product Dimensions (L x W x H)	80" x 39" x 14" (Height is adjustable with legs)
Item Weight	139.7 pounds
Material	Alloy Steel
Color	Grey
Finish Type	Powder Coated
Compatible Mattress Sizes	TwinXL, Full, Queen, King, California King
Included Components	Installation Manual, Remote
Batteries Required	2 AAA batteries (for remote, included), 1 9V battery (for emergency backup, not included)
Assembly Required	No (minimal setup)

8. Warranty Information

The iDealBed 6i Custom Adjustable Bed Base is backed by a **10-year nationwide warranty**. This warranty covers manufacturing defects and ensures peace of mind regarding the quality and durability of your product. For specific terms, conditions, and to register your product, please refer to the warranty card included with your purchase or visit the official iDealBed website.

9. Customer Support

If you have any questions, require assistance with setup, or encounter issues not covered in this manual, please contact iDealBed customer service. Contact information can be found on the iDealBed website or on your purchase documentation.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CCCBGM25

More documents and user manuals: **https://manuals.plus/**