

[Manuals.plus](#) /

› [Skullcandy](#) /

› Skullcandy Terrain XL Wireless Bluetooth Speaker User Manual

Skullcandy 2SKSK1848

Skullcandy Terrain XL Wireless Bluetooth Speaker User Manual

Model: 2SKSK1848

Brand: Skullcandy

1. INTRODUCTION

This manual provides essential information for the proper setup, operation, and maintenance of your Skullcandy Terrain XL Wireless Bluetooth Speaker. Please read these instructions thoroughly before using the device to ensure optimal performance and longevity.



Image 1.1: The Skullcandy Terrain XL Wireless Bluetooth Speaker, highlighting its portable and durable construction.

Your browser does not support the video tag.

Video 1.1: An official product video demonstrating the Skullcandy Terrain XL speaker's features and use cases.

2. WHAT'S IN THE BOX

Verify that all items are present upon unboxing:

- 1 x SKDY Terrain™ XL Wireless Speaker
- 1 x USB-C to USB-A Charging Cable (3 ft)
- Quick Start Guide (separate document)
- Warranty Information (separate document)

3. PRODUCT FEATURES

The Skullcandy Terrain XL speaker offers a range of features designed for portable audio:

- **IPX7 Waterproof Rating:** Submersible in up to 1 meter of water for 30 minutes.
- **18-Hour Battery Life:** Extended playtime on a single charge.

- **Multi-Link Technology:** Connects with up to 99 other Skullcandy Terrain speakers for expanded sound.
- **Powerful Bass:** Dual custom passive radiators for enhanced low-frequency audio.
- **Durable Design:** Features a nylon wrist wrap and waterproof woven fabric mesh.
- **Bluetooth 5.3:** For stable and efficient wireless connectivity.
- **USB-C Charging:** Modern and convenient charging port.



Image 3.1: The Skullcandy Terrain XL speaker submerged in water, illustrating its IPX7 waterproof capability.

4. SETUP

4.1 Initial Charge

Before first use, fully charge your Skullcandy Terrain XL speaker. Connect the included USB-C cable to the speaker's charging port and the USB-A end to a compatible power adapter (not included) or computer USB port. The LED indicators will show charging status.

4.2 Powering On/Off

- **To Power On:** Press and hold the Power button for approximately 2 seconds until you hear an audible tone and the LED indicators illuminate.
- **To Power Off:** Press and hold the Power button for approximately 2 seconds until you hear an audible tone and the LED indicators turn off.

5. OPERATING INSTRUCTIONS

5.1 Bluetooth Pairing

1. Ensure the speaker is powered on and within 1 meter of your device.
2. The speaker will automatically enter pairing mode when powered on for the first time, indicated by a flashing blue LED. If already paired, it will attempt to reconnect to the last device. To manually enter pairing mode, press and hold the Bluetooth button for 3 seconds.
3. On your device (smartphone, tablet, etc.), navigate to the Bluetooth settings.
4. Select "Skullcandy Terrain XL" from the list of available devices.
5. Once connected, the LED indicator will turn solid blue, and you will hear a confirmation tone.

5.2 Basic Controls

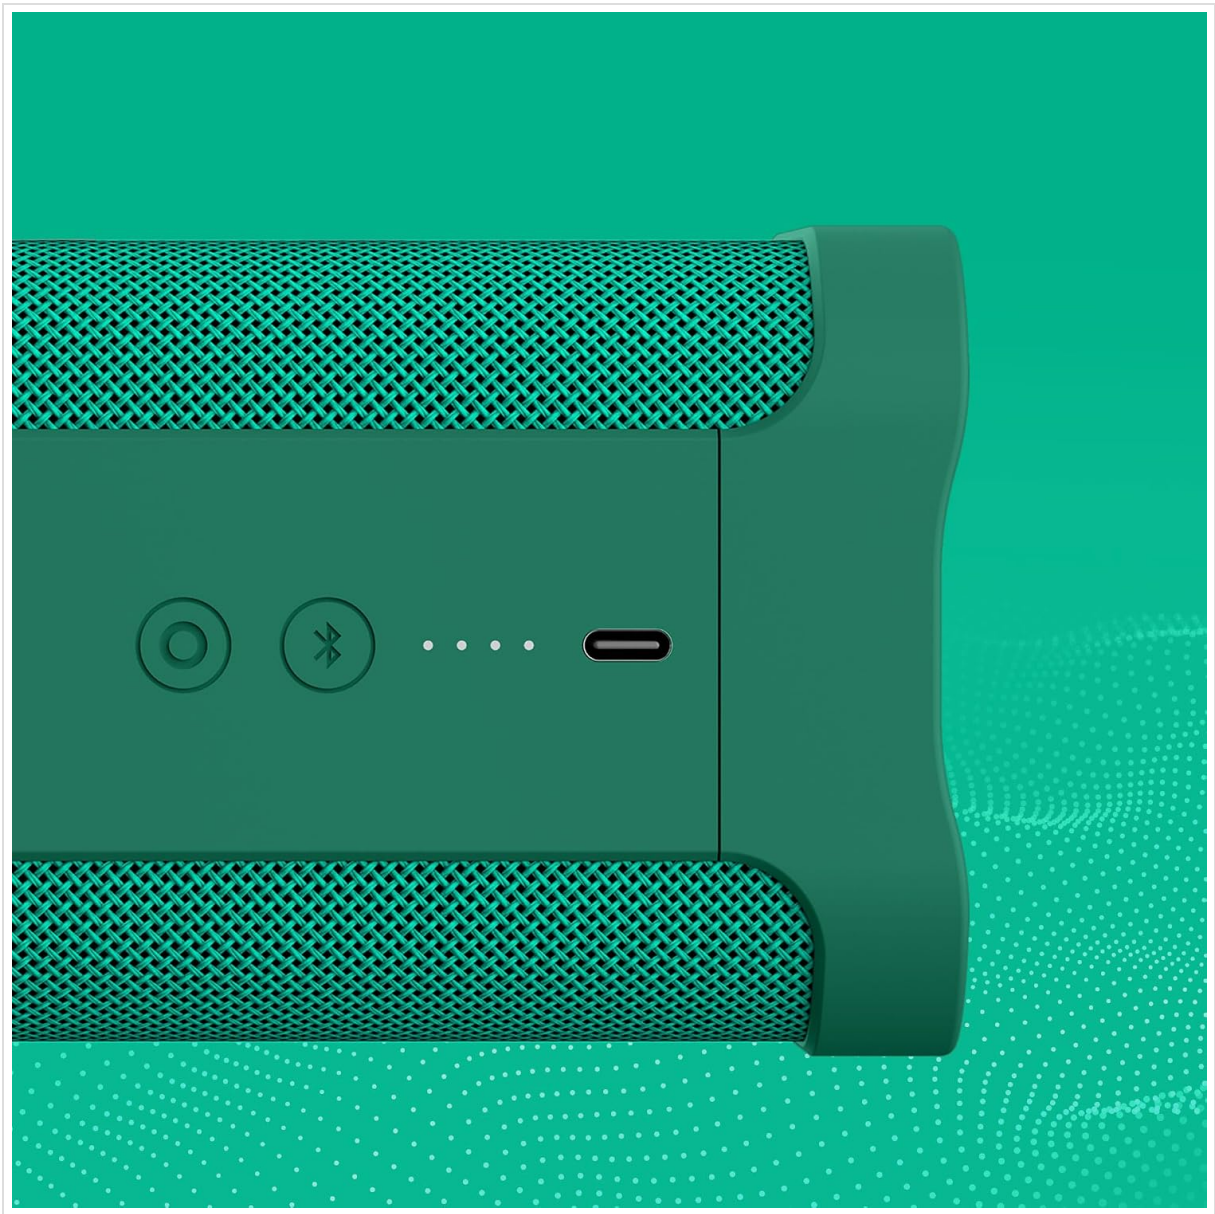


Image 5.1: Detailed view of the control buttons and USB-C charging port on the Skullcandy Terrain XL speaker.

Button/Action	Function
Power Button (Press & Hold 2s)	Power On/Off
Bluetooth Button (Press & Hold 3s)	Enter Pairing Mode

Button/Action	Function
Volume Up (+) (Short Press)	Increase Volume
Volume Down (-) (Short Press)	Decrease Volume
Play/Pause Button (Short Press)	Play/Pause Music
Play/Pause Button (Double Press)	Next Track
Play/Pause Button (Triple Press)	Previous Track
Multi-Link Button (Short Press)	Initiate Multi-Link Pairing

5.3 Multi-Link Pairing (Connect up to 99 Speakers)

The Multi-Link feature allows you to connect multiple Skullcandy Terrain speakers for a synchronized audio experience.

1. Ensure all speakers are powered on and not currently paired to any device.
2. Pair your primary Skullcandy Terrain XL speaker to your Bluetooth device as described in Section 5.1.
3. On the primary speaker, short press the **Multi-Link button**. The LED will flash to indicate it's searching for other speakers.
4. On each additional Skullcandy Terrain speaker you wish to link, short press the **Multi-Link button**.
5. The speakers will automatically connect. A confirmation tone will sound, and the Multi-Link LED on all connected speakers will illuminate solid.
6. To disconnect Multi-Link, short press the **Multi-Link button** on any connected speaker.



Image 5.2: Multiple Skullcandy Terrain speakers connected via Multi-Link, providing a larger soundstage.

6. CHARGING

The Skullcandy Terrain XL speaker is equipped with an 18-hour battery. When the battery is low, the LED indicator will flash red. Connect the included USB-C to USB-A charging cable to the speaker's USB-C port and a power source. The LED indicators will show charging progress and turn off when fully charged.

7. MAINTENANCE

7.1 Cleaning

To clean your speaker, use a soft, damp cloth. Do not use abrasive cleaners, solvents, or harsh chemicals, as these may damage the speaker's finish or internal components. Ensure the charging port cover is securely closed before cleaning or exposing to water.

7.2 Storage

Store the speaker in a cool, dry place away from direct sunlight and extreme temperatures. If storing for an extended period, charge the battery to approximately 50% every few months to maintain battery health.

8. TROUBLESHOOTING

Problem	Solution
Speaker does not power on.	Ensure the battery is charged. Connect to a power source and try again.
Cannot pair via Bluetooth.	Ensure the speaker is in pairing mode (flashing blue LED). Turn off and on your device's Bluetooth. Move speaker closer to device. Forget "Skullcandy Terrain XL" in your device's Bluetooth settings and re-pair.
No sound or low volume.	Increase volume on both the speaker and your connected device. Ensure the speaker is not muted. Check if the speaker is properly paired.
Multi-Link not connecting.	Ensure all speakers are Skullcandy Terrain models. Make sure the primary speaker is paired to your device, then activate Multi-Link on all speakers. Ensure speakers are within range of each other.
Charging issue.	Verify the USB-C cable is securely connected. Try a different USB-C cable or power adapter.

9. SPECIFICATIONS

Feature	Detail
Model Number	2SKSK1848
Connectivity	Bluetooth 5.3
Water Resistance	IPX7 (Submersible up to 1m for 30 min)
Battery Life	Up to 18 Hours
Charging Port	USB-C
Speaker Output Power	3 Watts
Frequency Response	30 Hz
Bluetooth Range	10 Meters (33 feet)
Dimensions (D x W x H)	3.5" x 3.5" x 7.5"
Weight	<i>(Information not provided in source data)</i>



Image 9.1: Dimensional drawing of the Skullcandy Terrain XL speaker.

10. WARRANTY AND SUPPORT

This Skullcandy Terrain XL speaker comes with a **Limited Warranty**. For detailed warranty terms, conditions, and registration, please refer to the separate warranty information document included in your product packaging or visit the official Skullcandy website. For technical support, troubleshooting assistance beyond this manual, or service inquiries, please contact Skullcandy customer support through their official channels.

Online Support: www.skullcandy.com/support