



[Manuals.plus](#) /

> [KCO](#) /

> KCO Lighting L1043-SC 7-Light Brushed Nickel Chandelier Instruction Manual

KCO L1043-SC

KCO Lighting L1043-SC 7-Light Brushed Nickel Chandelier Instruction Manual

Model: L1043-SC

1. IMPORTANT SAFETY INFORMATION

Please read and understand all instructions before beginning installation. Failure to do so may result in electric shock, fire, or other injuries. Keep this manual for future reference.

- **Electrical Safety:** Always disconnect power at the main circuit breaker before installation or maintenance. Consult a qualified electrician if you are unsure about wiring.
- **Proper Grounding:** Ensure the fixture is properly grounded to avoid potential electric shock.
- **Bulb Compatibility:** Use only E26 base bulbs, maximum 60W per bulb. Compatible with LED, incandescent, or CFL bulbs. For dimming functionality, use dimmable bulbs and a compatible dimmer switch.
- **Handling Glass:** Handle glass globes with care to prevent breakage. Wear gloves if necessary.
- **Indoor Use Only:** This fixture is designed for indoor use in dry locations. Do not expose to moisture.
- **Secure Mounting:** Ensure the mounting surface can support the weight of the fixture.

2. PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation.

- Chandelier Frame (Brushed Nickel)
- Clear Glass Globes (7 pieces)
- E26 Bulbs (7 pieces, warm white, non-dimmable, included as gifts)
- Extension Rods (3 pieces: 7.9" x 1, 11.8" x 2)
- Mounting Hardware Kit
- Instruction Manual



Figure 2.1: KCO Lighting L1043-SC Chandelier with 7 clear glass globes.

3. INSTALLATION INSTRUCTIONS

Professional installation is recommended. Ensure power is disconnected at the circuit breaker before starting.

1. **Prepare Mounting Location:** Turn off power at the circuit breaker. Remove any existing fixture.
2. **Assemble Extension Rods:** Select the desired length by combining the provided extension rods (7.9" and 11.8" sections). The maximum hanging length is 31.5 inches. For sloped or vaulted ceilings, the durable swivel adapter allows for flexible mounting.
3. **Mount Fixture:** Securely attach the mounting bracket to the ceiling junction box. Connect the fixture wires (live, neutral, ground) to the corresponding house wires according to local electrical codes.
4. **Attach Chandelier Body:** Carefully lift and attach the chandelier body to the mounting bracket.
5. **Install Glass Globes:** Gently screw each clear glass globe onto its respective lamp holder.
6. **Insert Bulbs:** Screw the E26 bulbs into the sockets.
7. **Restore Power:** Once installation is complete and all connections are secure, restore power at the circuit breaker.

Product Parameters

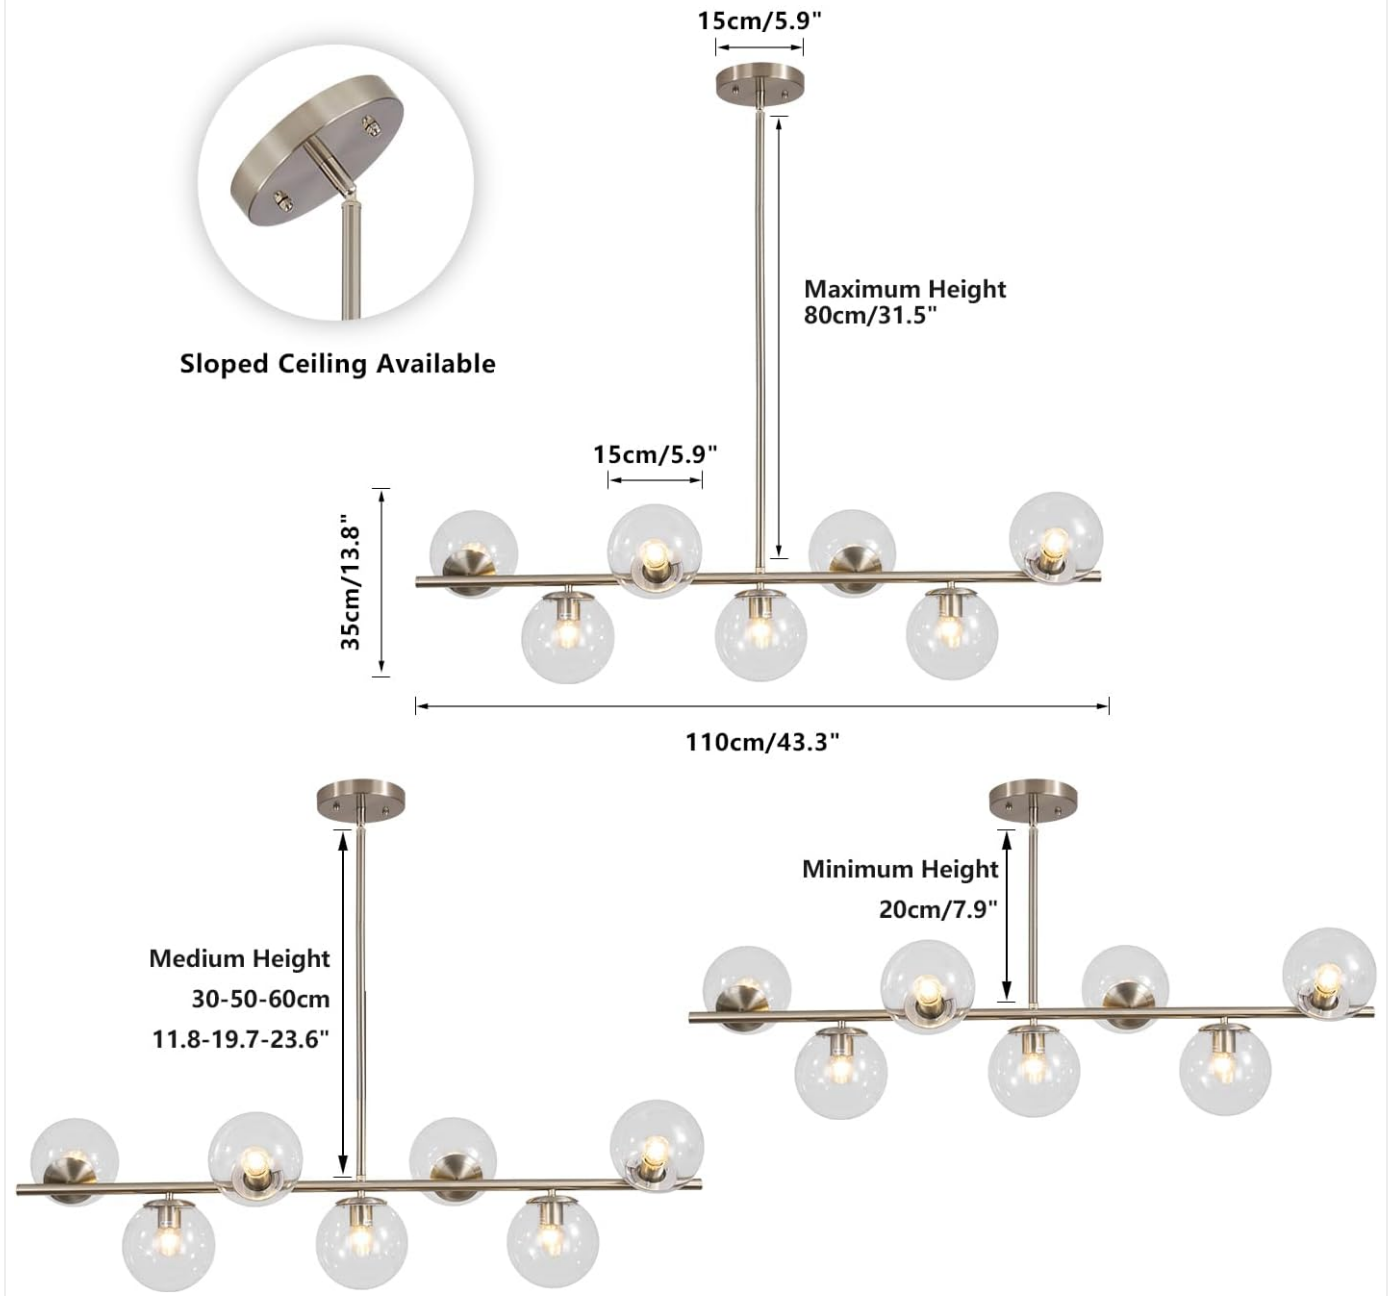


Figure 3.1: Product dimensions and illustration of sloped ceiling compatibility.

DIFFERENT HEIGHTS CAN BE CUSTOMIZED

If you need to customize the longer rod, please contact us anytime.



Can be used on any ceiling



3 × extension rods in package




Figure 3.2: Adjustable height feature using included extension rods.

4. OPERATION

The KCO Lighting L1043-SC chandelier is operated via a standard wall switch. For dimming functionality, ensure dimmable E26 bulbs are installed and connected to a compatible dimmer switch.

Light Color Temperature Examples (with compatible bulbs)




Turn Off

Lights Off



Warm Light - 3000K

Warm Light - 3000K

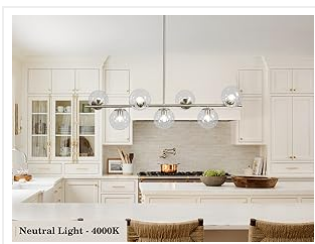

Neutral Light - 4000K

Neutral Light - 4000K



White Light - 6000K

5. MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your chandelier.

- **Cleaning:** Disconnect power before cleaning. Use a soft, dry cloth to wipe the metal frame. For glass globes, use a soft cloth dampened with a mild glass cleaner. Avoid abrasive cleaners or solvents that may damage the finish.
- **Bulb Replacement:** Always disconnect power before replacing bulbs. Allow bulbs to cool completely before handling.
- **Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

6. TROUBLESHOOTING

If you encounter issues with your chandelier, refer to the following common problems and solutions:

| Problem | Possible Cause | Solution |
|-------------------------------|--|---|
| Light does not turn on | No power; Loose wiring; Faulty bulb | Check circuit breaker; Verify wiring connections; Replace bulb. |
| Flickering lights | Loose bulb; Incompatible dimmer switch/bulbs | Tighten bulbs; Ensure dimmer and bulbs are compatible. |
| Glass globe is broken/damaged | Accidental impact; Manufacturing defect | Contact KCO Lighting customer service for a replacement. |

7. PRODUCT SPECIFICATIONS

| Feature | Detail |
|----------------------|------------------------------------|
| Brand | KCO Lighting |
| Model Number | L1043-SC |
| Color | Silver+Clear |
| Material | Glass, Metal |
| Style | Mid Century |
| Light Fixture Form | Pendant |
| Product Dimensions | 43.3"L x 13.8"W x 31.5"H (Maximum) |
| Indoor/Outdoor Usage | Indoor |
| Power Source | AC |

| Feature | Detail |
|------------------------------|---|
| Installation Type | Semi Flush Mount |
| Special Features | Adapt to Flat/Sloped Ceiling, Adjustable Height, Corded |
| Light Source Type | LED (compatible) |
| Shade Material | Glass |
| Number of Light Sources | 7 |
| Voltage | 220 Volts |
| Light Color (Included Bulbs) | Warm White (3000 Kelvin) |
| Bulb Base | E26 |
| Maximum Compatible Wattage | 60 Watts (per bulb) |
| Brightness | 5600 Lumens (total) |
| Item Weight | 13.52 pounds (6.15 Kilograms) |
| Assembly Required | Yes |

8. WARRANTY AND SUPPORT

KCO Lighting is committed to providing quality products and excellent customer service.

- **3-Year Warranty:** We offer a 3-year warranty for this product. Contact us for free replacement if you encounter any quality issues.
- **Professional Services:** If you have any problems or questions, our customer service team is available to provide solutions within 24 hours.
- **Customization Service:** For specific customization needs, please contact KCO Lighting for consultation.

To contact support or request replacements, please communicate with the seller "KCO Lighting" via your order number.



Contact Seller "KCO Lighting" via Order Number, Send Replacement Free



Figure 8.1: Example of replacement parts available upon request.



Figure 8.2: KCO Lighting commitment to professional services and support.

