Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

SANODESK QS1M-1675-EU

SANODESK QS1 Electric Standing Desk User Manual

Model: QS1M-1675-EU

1. Introduction

Thank you for choosing the SANODESK QS1 Electric Standing Desk. This manual provides essential information for the safe assembly, operation, and maintenance of your new desk. Please read it thoroughly before use and retain it for future reference.

Safety Warnings

Important: Do not exceed the maximum recommended weight capacity of 70 kg (154 lbs). Ensure the desk is properly stabilized to prevent tipping or falling. Keep children and pets away from the desk during operation. Avoid placing liquids directly on the control panel or motor components. Disconnect power before cleaning or maintenance.

2. Package Contents

Before assembly, please verify that all components are present and undamaged. The package typically includes:

- Desktop (White + Maple, 160 x 75 cm)
- Electric Lifting Frame (White)
- Control Panel with Memory Function
- Power Adapter and Cables
- Assembly Hardware (screws, tools, etc.)
- User Manual (this document)

If any parts are missing or damaged, please contact SANODESK customer support.

3. Setup and Assembly

Assembly of the SANODESK QS1 is designed to be straightforward. It is recommended to have two people for assembly due to the size and weight of the components. Please follow the detailed instructions provided in the separate assembly guide included with your product.

1. Unpack all components and lay them out on a clean, soft surface to prevent scratches.

2. Attach the lifting columns to the desktop using the provided screws.
3. Install the foot supports to the lifting columns.
4. Mount the control panel to the underside of the desktop in an accessible location.
5. Connect all motor and control cables to the control box, ensuring secure connections.
6. Connect the power adapter to the control box and then to a power outlet.
7. Perform initial calibration as per the assembly guide (usually involves lowering to the lowest point and then slightly raising).



Image: Illustration of the SANODESK QS1 desk frame components during assembly, showing the white legs and crossbar structure.

4. Operating Instructions

Control Panel Overview



Image: Close-up of the SANODESK multifunction control panel, showing buttons for up/down adjustment, memory presets, and a digital display.

The desk is operated via a multifunction control panel, typically mounted on the underside of the desktop. It features buttons for height adjustment, memory presets, and a digital display.

Height Adjustment

Use the **Up (⌃)** and **Down (⌄)** arrow buttons on the control panel to adjust the desk height. The desk can be adjusted smoothly between 71 cm (minimum) and 117 cm (maximum).



Image: Visual representation of the SANODESK QS1 desk adjusting from its minimum height of 71cm to its maximum height of 116cm, illustrating the range of motion.

Memory Function

The control panel allows you to save preferred height settings. To set a memory position:

1. Adjust the desk to your desired height using the Up/Down buttons.
2. Press the **"M"** button (Memory) or similar designated memory button. The display may flash.
3. Press one of the numbered preset buttons (e.g.,**"1"**, **"2"**, **"3"**) within a few seconds to save the current height to that preset.

To recall a saved height, simply press the corresponding numbered preset button.

Anti-Collision Technology

The SANODESK QS1 is equipped with an anti-collision system. If the desk encounters an obstacle during height adjustment, it will automatically stop and reverse slightly to prevent damage to the desk or objects. This feature enhances

safety during operation.

Quiet Operation

The desk features an ultra-quiet motor, operating below 51 dB, ensuring minimal noise disruption in your workspace during height adjustments.



Image: A cat sleeping peacefully on the SANODESK QS1 desk, illustrating the quiet operation of the desk's motor, which is rated below 51dB.

5. Maintenance

Regular maintenance ensures the longevity and optimal performance of your SANODESK QS1.

- **Cleaning:** Wipe the desktop and frame with a soft, damp cloth. Avoid abrasive cleaners or solvents that could damage the finish.
- **Cable Management:** Periodically check all cables for wear or damage. Ensure they are neatly routed and not

pinched.

- **Fasteners:** Occasionally check and tighten any loose screws or bolts to maintain stability.
- **Weight Capacity:** Do not overload the desk beyond its 70 kg capacity.

6. Troubleshooting

If you encounter issues with your SANODESK QS1, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Desk does not move or respond.	Power cable disconnected, motor cable loose, control panel issue.	Check if the power cable is securely plugged into the wall outlet and the control box. Inspect all motor and control cables for secure connections. Try resetting the desk by unplugging it for 30 seconds and then plugging it back in.
Desk stops during adjustment (anti-collision).	Obstruction detected.	Remove any objects that may be obstructing the desk's movement path. The desk should then resume normal operation.
Desk is unstable at higher heights.	Loose fasteners, uneven floor.	Ensure all assembly screws and bolts are tightened. Verify the desk is on a level surface. Adjust foot glides if necessary.
Error code displayed (e.g., E22, E23).	Motor connection issue or calibration required.	Press and hold the **Down (⌄)** button until the desk reaches its lowest point and then slightly rises. This often recalibrates the system. Check the motor connections, especially inside the control box, as they can sometimes loosen during transport.

If the problem persists, please contact SANODESK customer support for further assistance.

7. Product Specifications

Feature	Detail
Brand	SANODESK
Model Number	QS1M-1675-EU
Color	White + Maple
Product Dimensions (L x W x H)	160 x 75 x 71-117 cm (Adjustable Height)
Material	Engineered Wood (Desktop), Metal (Base)
Special Features	Ergonomic, Height Adjustable, Electric, Memory Presets, Anti-Collision
Weight Capacity	70 kg (154 lbs)
Noise Level	Below 51 dB

Feature	Detail
Item Weight	26.5 Kilograms

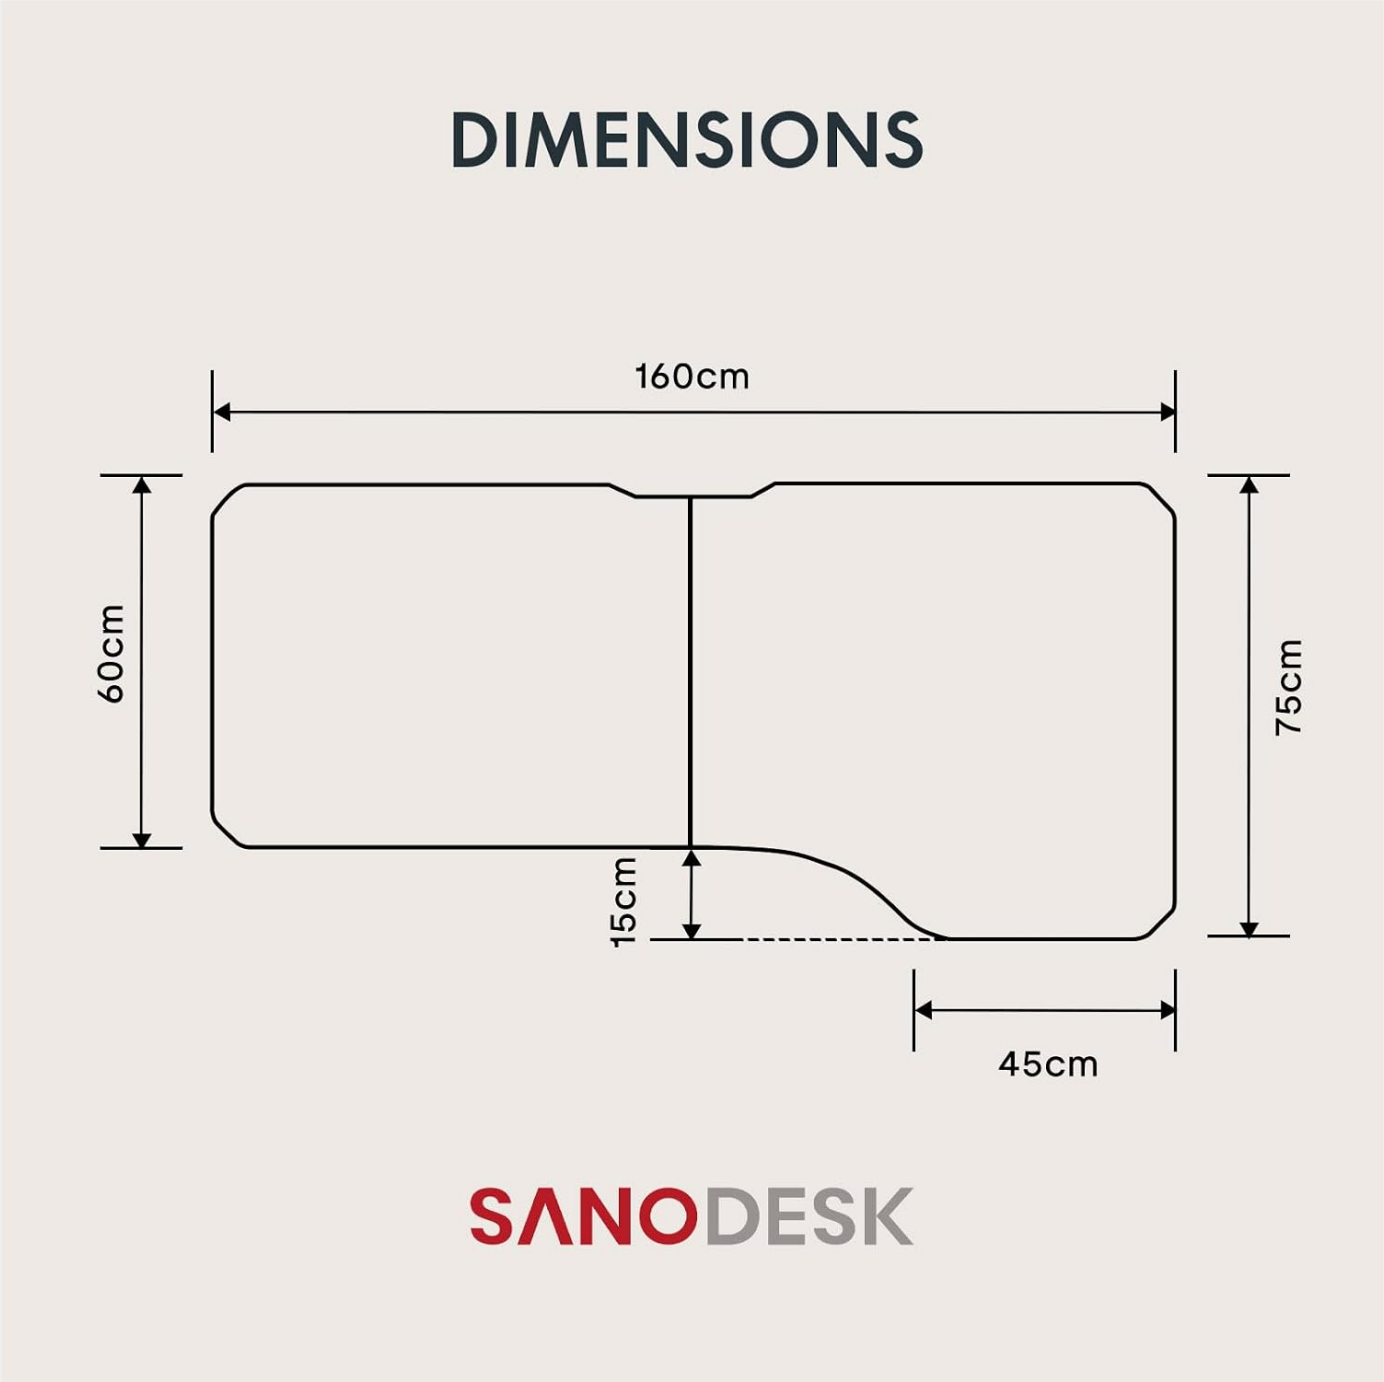


Image: Technical diagram showing the dimensions of the SANODESK QS1 desk, including a length of 160cm and widths of 60cm and 75cm for different sections of the L-shaped top.



Image: Graphic illustrating the 70kg load capacity of the SANODESK QS1 desk, with an arrow pointing downwards to emphasize the weight it can support.

8. Warranty and Support

SANODESK products are manufactured to high-quality standards. For information regarding warranty coverage, please refer to the warranty card included with your product or visit the official SANODESK website. If you require technical assistance, have questions about assembly, or need to report a missing/damaged part, please contact SANODESK customer support directly. Contact details can typically be found on the product packaging or the official brand website.

© 2025 SANODESK. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CDLD56H8

More documents and user manuals: **https://manuals.plus/**