

PARTPHONER PAPO075AZ1

PARTPHONER Outdoor Lamp Post Light Instruction Manual

Model: PAPO075AZ1

IMPORTANT SAFETY INFORMATION

Please read and understand all instructions before beginning installation and use. Failure to follow these instructions may result in electric shock, fire, or other hazards that can cause injury or property damage.

- **Electrical Installation:** Installation of this product requires knowledge of the lamp post's construction and operation, and the hazards involved. It is strongly recommended to hire a qualified, licensed electrician for installation to ensure safety and compliance with local electrical codes.
- **Power Disconnection:** Always disconnect power at the circuit breaker or fuse box before installing, servicing, or cleaning this product.
- **Grounding:** Ensure proper grounding to avoid potential electrical shock.
- **Wiring:** All wiring connections must be made in accordance with local and national electrical codes (NEC).
- **Bulb Type:** Use only the specified bulb type and wattage to prevent overheating and potential fire hazards.
- **Outdoor Use:** This fixture is designed for outdoor use. Ensure all connections are waterproofed and sealed properly.

PRODUCT OVERVIEW

The PARTPHONER Outdoor Lamp Post Light is a durable and functional lighting solution designed for various outdoor spaces. It features a triple-head design, a built-in GFCI outlet for convenient outdoor power access, and a dusk-to-dawn sensor for automatic operation.

Key Features:

- **Advanced GFCI Technology:** Integrated GFCI outlet with two receptacles for safe outdoor power access, protecting against surges and electrical faults. Max 1875W load.
- **Dusk-to-Dawn Sensor:** Automatically turns the light on at dusk and off during the day, optimizing energy use.
- **Durable Construction:** Crafted from cast aluminum with a bronze finish and sturdy 6-sided glass panels, ensuring anti-rust and corrosion resistance for all weather conditions.
- **Hardwired Design:** Provides stable and sufficient light output, unlike solar-powered alternatives that can be affected by weather.
- **Easy Bulb Replacement:** Features an open bottom design for convenient bulb changes.

- **Wide Application:** Ideal for lighting backyards, gardens, patios, porches, pathways, walkways, streets, landscapes, lawns, and driveways.



Figure 1: Overall view of the PARTPHONER Outdoor Lamp Post Light.



**Aluminum Structure
with Bronze Finish**

Sturdy Clear Glass

Figure 2: Detail of the lamp head, highlighting the aluminum structure with bronze finish and sturdy clear glass panels.

Please Press the " RESET" to turn on power



Figure 3: Integrated GFCI outlet with RESET and TEST buttons for safe and convenient outdoor power.

Your browser does not support the video tag.

Video 1: Official product video demonstrating features such as the GFCI outlet, dusk-to-dawn sensor, and overall design.

SETUP AND INSTALLATION

This lamp post is designed for pole mounting and requires hardwiring. Due to the electrical nature of the installation and masonry work potentially involved, it is highly recommended to consult and hire a qualified electrician for proper and safe installation.

Pre-Installation Checklist:

- Ensure all components are present and undamaged.
- Verify power is disconnected at the main circuit breaker.
- Prepare the installation site, including any necessary masonry work for the base.
- Have appropriate tools ready (e.g., screwdriver, wire strippers, measuring tape, level).

Installation Steps (Professional Installation Recommended):

1. **Prepare the Base:** If installing in fresh concrete, dig holes and set the bolts down before pouring concrete. If replacing an existing lamp post, ensure the existing bolts are 7.68 inches apart from center to center for compatibility.
2. **Assemble Lamp Heads:** Carefully attach the three lantern heads to the central post. Ensure all wiring connections are secure and properly insulated.
3. **Mount the Post:** Secure the lamp post to the prepared base using the provided mounting accessories. Use the additional template card for quick positioning if needed.
4. **Electrical Connection:** Connect the lamp post's wiring to your main power supply. This step is critical and must be performed by a qualified electrician to ensure proper grounding and adherence to all electrical codes.
5. **Install Bulbs:** Insert the three included E26 base bulbs into the sockets.
6. **Test Functionality:** Once installation is complete and all connections are secure, restore power and test the light and GFCI outlet.

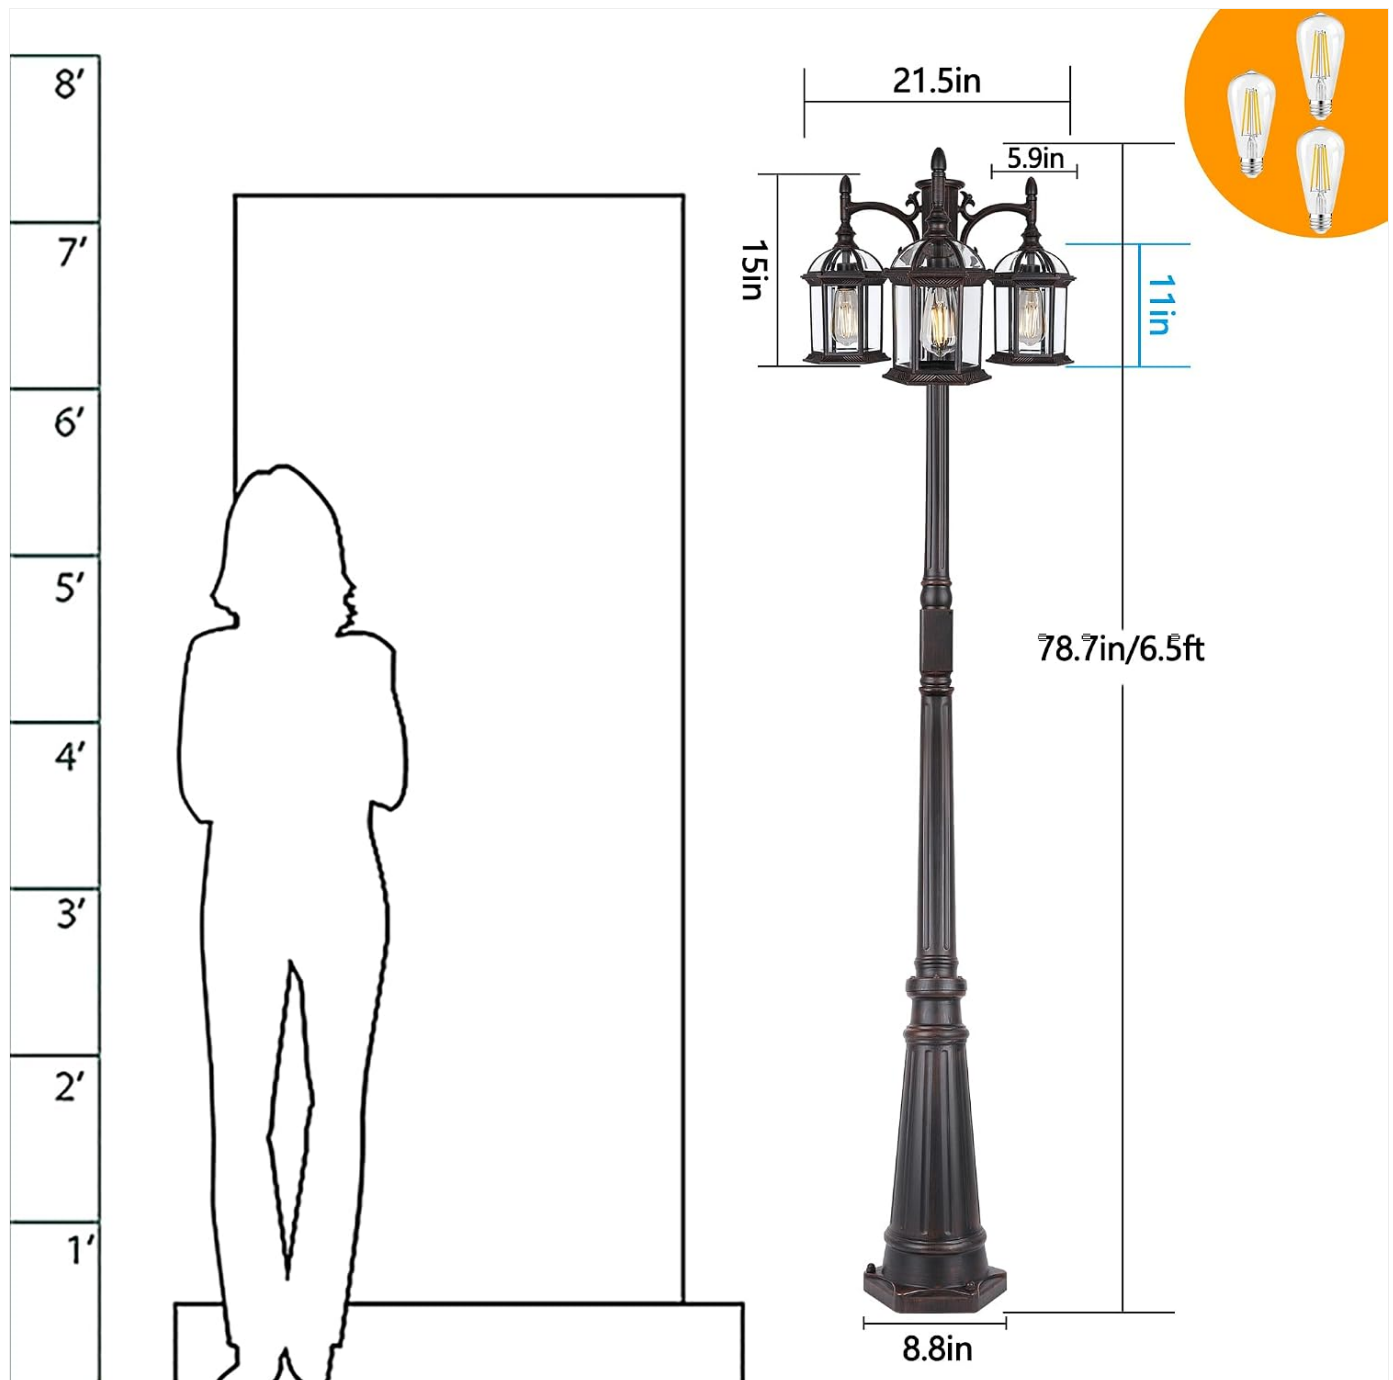


Figure 4: Product dimensions for installation planning. The lamp post is approximately 6.5 feet tall.

OPERATING INSTRUCTIONS

Dusk-to-Dawn Sensor:

The integrated photocell sensor automatically detects ambient light levels. The lamp post will turn on at dusk and turn off at dawn, providing hands-free operation and energy savings. Ensure the sensor is not obstructed by objects or direct artificial light sources, as this may interfere with its proper function.

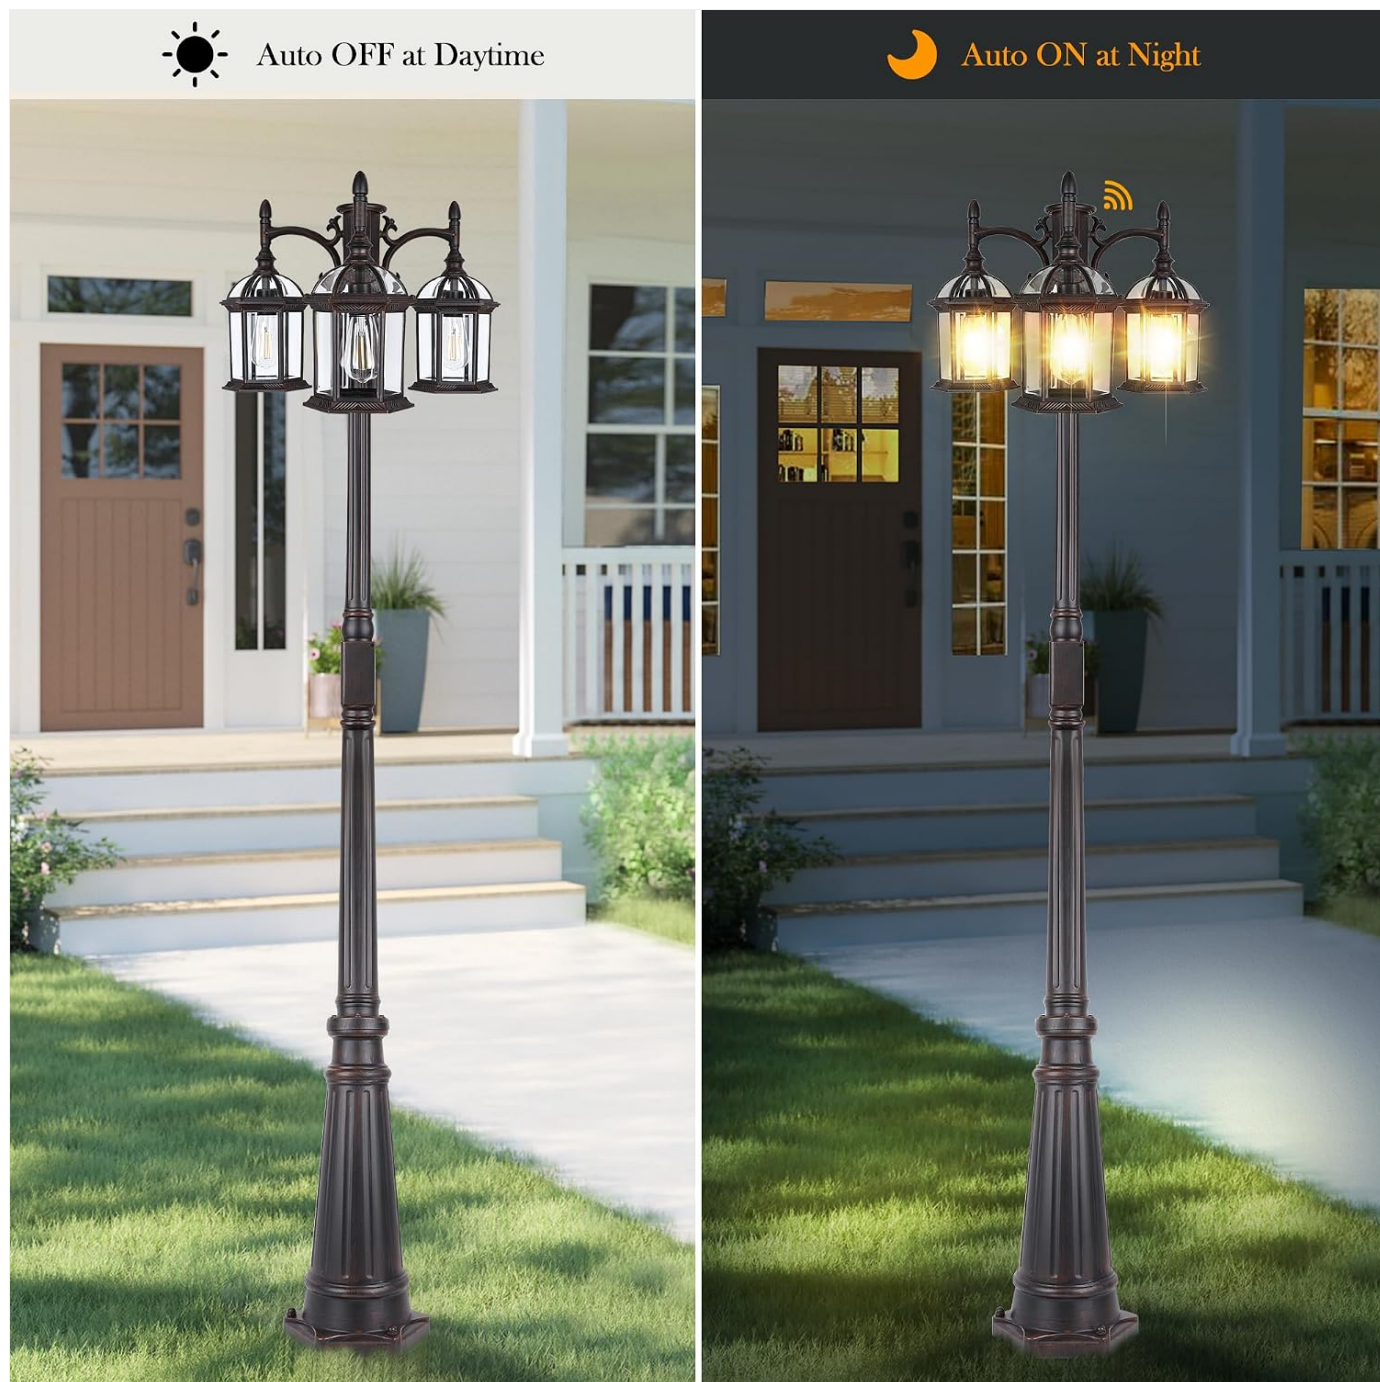


Figure 5: Visual representation of the lamp post's automatic dusk-to-dawn functionality.

GFCI Outlet Usage:

The GFCI (Ground Fault Circuit Interrupter) outlet provides protected power for outdoor devices. To activate the outlet and the light, press the "RESET" button on the GFCI receptacle. If the GFCI trips (e.g., due to a ground fault), the "TEST" button may pop out, and the light and outlet will lose power. To restore power, unplug any devices, press the "RESET" button firmly until it clicks into place.

Please Press the " RESET" to turn on power



Figure 6: Detailed view of the GFCI outlet, showing the RESET and TEST buttons.

Bulb Replacement:

To replace bulbs, ensure power is disconnected. The lamp heads feature an open bottom design, allowing for easy access to the E26 sockets. Simply unscrew the old bulb and screw in a new one of the appropriate type and wattage.

MAINTENANCE

Regular maintenance will help prolong the life and appearance of your lamp post.

- **Cleaning:** Periodically clean the lamp post and glass panels with a soft, damp cloth. Avoid abrasive cleaners or solvents that could damage the finish or glass.
- **Weather Resistance:** The lamp post is designed with IP65 waterproof rating and constructed from anti-rust and corrosion-resistant materials to withstand various weather conditions. However, regular inspection for any signs of wear or damage, especially after severe weather, is recommended.



Figure 7: The lamp post is designed to be waterproof, suitable for outdoor use in various weather conditions.

TROUBLESHOOTING

If you encounter issues with your lamp post, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	• Power is off at the source. • GFCI outlet is tripped. • Dusk-to-dawn sensor is obstructed or faulty. • Bulb is loose or burnt out. • Wiring issue.	• Check circuit breaker/fuse. • Press the "RESET" button on the GFCI outlet. • Ensure sensor is clear and not exposed to artificial light. • Tighten or replace bulbs. • Consult a qualified electrician.

Problem	Possible Cause	Solution
GFCI outlet is not working.	- GFCI is tripped. - Faulty GFCI unit. - Wiring issue.	- Press the "RESET" button. - If it repeatedly trips or doesn't reset, the unit may be faulty and require replacement by an electrician. - Consult a qualified electrician.
Light flickers or dims.	- Loose bulb. - Incorrect bulb wattage. - Voltage fluctuations. - Wiring issue.	- Tighten bulb. - Ensure correct bulb wattage is used. - Consult an electrician or power company. - Consult a qualified electrician.

SPECIFICATIONS

Attribute	Detail
Brand	PARTPHONER
Model Number	PAPO075AZ1
Color	Birdcage Bronze
Material	Aluminum, Glass
Light Fixture Form	Path
Room Type	Patio (Outdoor)
Product Dimensions (L x W x H)	84" x 21.5" x 18"
Indoor/Outdoor Usage	Outdoor
Power Source	Corded Electric (Hardwired)
Installation Type	Pole Mount
Special Feature	Waterproof (IP65)
Light Source Type	LED (Bulbs Included)
Finish Type	Bronze
Number of Light Sources	3
Voltage	120V (AC)
Light Color	Warm White
Switch Type	Dusk-to-Dawn Sensor
Item Weight	21.2 pounds
Assembly Required	Yes

WARRANTY AND SUPPORT

For any problems or inquiries regarding your PARTPHONER Outdoor Lamp Post Light, please feel free to contact the manufacturer. They are committed to assisting you and will help resolve issues within 24 hours.

Please refer to your purchase documentation for specific warranty terms and contact information.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question