



Manuals.plus /

› Viruhaka /

› Viruhaka Modern LED Chandelier Model Vi8621 Instruction Manual

Viruhaka Vi8621

Viruhaka Modern LED Chandelier Instruction Manual

MODEL: Vi8621

Brand: Viruhaka

INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your Viruhaka Modern LED Chandelier, Model Vi8621. Please read this manual thoroughly before installation and retain it for future reference.

SAFETY INFORMATION

- **Electrical Safety:** Always disconnect power at the circuit breaker before installation, maintenance, or cleaning.
- **Professional Installation:** Installation should be performed by a qualified electrician to ensure safety and compliance with local electrical codes.
- **Indoor Use Only:** This fixture is designed for indoor use in dry locations. Do not expose to moisture or direct water.
- **Voltage:** Ensure the supply voltage is compatible with the fixture's requirements (110 Volts AC).
- **Handling:** Handle the fixture with care to prevent damage. Avoid touching the LED light source directly.

PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation.

- 1x Viruhaka Modern LED Chandelier (Model Vi8621)
- 1x Remote Control
- Installation Hardware (screws, wire connectors, etc.)

SPECIFICATIONS

Brand	Viruhaka
Model Name	PL8616
Model Number	Vi8621
Dimensions (L x W x H)	12.02" x 12.02" x 70.86" (adjustable height)
Material	Aluminum
Light Source Type	Integrated LED
Color Temperature (CCT)	4000K (Neutral Light), adjustable range 3000K-6000K via remote
Brightness	1500 Lumens
Wattage	110 Watts
Voltage	110 Volts (AC)
Control Method	Remote Control (Infinite dimming, CCT adjustment)
Mounting Type	Ceiling Mount (Flush Mount)
Special Features	Energy Efficient, Retractable Sling (Adjustable Height), Anti-rust, Anti-corrosion, LED eye protection
Certifications	FCC

SETUP AND INSTALLATION

The Viruhaka Modern LED Chandelier is designed for direct ceiling installation with no additional assembly required for the fixture itself. Ensure power is disconnected before beginning.

- 1. Prepare the Installation Area:** Turn off the main power supply at the circuit breaker to avoid electrical shock.
- 2. Mount the Ceiling Plate:** Secure the mounting bracket (usually included with standard ceiling fixtures) to the junction box in the ceiling.
- 3. Wire the Fixture:** Connect the chandelier's electrical wires to the household wiring according to local electrical codes. Typically, this involves connecting live to live, neutral to neutral, and ground to ground. Use appropriate wire connectors.
- 4. Attach the Fixture to the Ceiling:** Carefully lift the chandelier and attach its canopy to the mounting bracket, securing it with the provided screws.
- 5. Adjust Height:** The lifting rope has a maximum length of 70.86 inches (180 cm) and is adjustable. Adjust the length of the suspension cable to achieve the desired height for your space. The cable can be adjusted by pressing the locking mechanism on the canopy or fixture body and sliding the cable.
- 6. Restore Power:** Once installation is complete and all connections are secure, restore power at the circuit breaker.



Image: The Viruhaka Modern LED Chandelier, Model Vi8621, showcasing its sleek design and adjustable suspension. This image illustrates the overall appearance of the installed fixture.

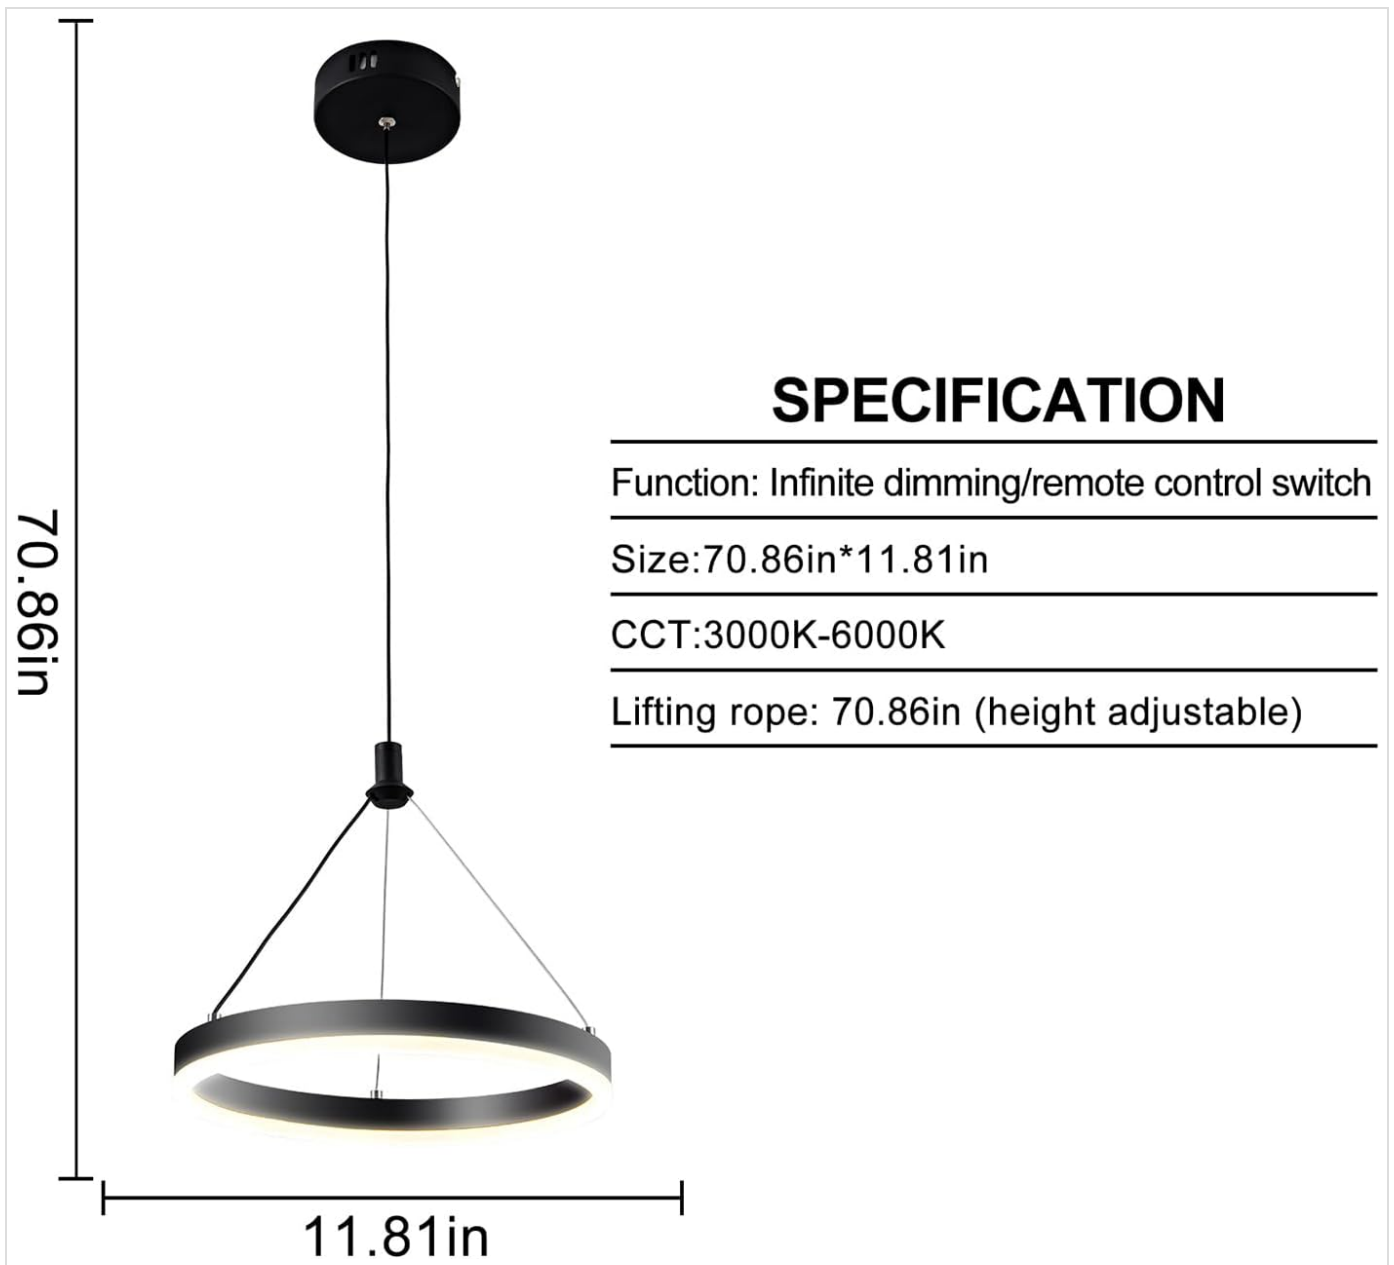


Image: A technical diagram detailing the dimensions of the chandelier, including its 11.81-inch width and adjustable lifting rope up to 70.86 inches, highlighting its height flexibility.

OPERATING INSTRUCTIONS

The Viruhaka Modern LED Chandelier is operated using the included remote control.

- Power On/Off:** Use the dedicated power button on the remote control to turn the light fixture on or off.
- Brightness Adjustment (Dimming):** The remote control allows for infinite dimming. Use the brightness adjustment buttons (often marked with '+' and '-' or up/down arrows) to increase or decrease the light intensity to your preference.
- Color Temperature Adjustment:** The fixture offers adjustable color temperature from 3000K (warm white) to 6000K (cool white). Use the CCT adjustment buttons on the remote (often marked with 'CCT' or sun icons) to cycle through or fine-tune the desired light color. The default setting is 4000K neutral light.



Image: The chandelier providing neutral 4000K light in a dining room setting, demonstrating its illumination capabilities and aesthetic integration.

MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your chandelier.

- **Cleaning:** Before cleaning, ensure the power is disconnected. Use a soft, dry, or slightly damp cloth to wipe the fixture. Avoid abrasive cleaners, solvents, or polishes that could damage the finish or LED components.
- **Material Care:** The fixture is made of aluminum, which is rust-resistant and corrosion-resistant. However, avoid harsh chemicals or excessive moisture to maintain its appearance and integrity.
- **LED Longevity:** The integrated LED light source is designed for long service life and does not require bulb replacement.

TROUBLESHOOTING

If you encounter issues with your Viruhaka Modern LED Chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power supply; loose wiring; faulty remote control battery.	<ul style="list-style-type: none"> ◦ Check the circuit breaker and wall switch. ◦ Ensure all electrical connections are secure (consult a qualified electrician if unsure). ◦ Replace the remote control battery.
Remote control not working.	Dead battery; remote not paired; obstruction.	<ul style="list-style-type: none"> ◦ Replace the battery in the remote control. ◦ Ensure there are no obstructions between the remote and the fixture. ◦ If the remote requires pairing, refer to specific instructions that may have been included with the remote itself (not detailed in product data).
Light flickers or dims unexpectedly.	Unstable power supply; loose connection; incompatible dimmer switch (if applicable, though this uses its own remote).	<ul style="list-style-type: none"> ◦ Check power connections. ◦ Ensure the fixture is not connected to an external dimmer switch, as it has integrated dimming.

WARRANTY AND SUPPORT

While specific warranty details are not provided, Viruhaka products undergo strict quality inspection before leaving the factory. For any questions, technical assistance, or support regarding your Viruhaka Modern LED Chandelier, please contact the manufacturer or your retailer. Provide your model number (Vi8621) and purchase details when seeking support.