

BOXPUP Remoter ATV3

BOXPUP Remoter ATV3 Remote Control User Manual

Model: Remoter ATV3

Brand: BOXPUP

1. INTRODUCTION

The BOXPUP Remoter ATV3 is a versatile remote control designed for various TV boxes and Android sticks. It features both Bluetooth (BLE) and Infrared (IR) control capabilities, including voice control and IR learning for enhanced compatibility.

Remoter ATV3

Replaces conventional remote control for Q3 and Q5

Linear infrared sensor is strong, fast and accurate



The BOXPOT Remoter ATV3 remote control shown with a compatible TV box and TV stick.

2. PRODUCT FEATURES

- **Bluetooth (BT) Control:** Connects to devices via Bluetooth for long-distance control and strong signal penetration.
- **Voice Function:** Supports voice control; press and hold the voice key to initiate searches.
- **Multi-key Infrared Learning:** Equipped with an infrared learning function to replicate original remote control functions.
- **Wide Compatibility:** Compatible with various devices including Q3, Q3 MAX, Q5, Q5 PLUS, Q10, Lemon TV mini, L1, and L2.

3. PACKAGE CONTENTS

- BOXPOT Remoter ATV3 Remote Control
- User Manual (this document)

Note: 2 AAA batteries are required and not included in the package.

4. SETUP AND PAIRING

4.1 Battery Installation

Open the battery compartment cover on the back of the remote control. Insert two AAA batteries, ensuring correct polarity (+/-). Close the battery compartment cover.



Insert two AAA batteries into the remote control's battery compartment.

4.2 Bluetooth (BLE) Pairing

To pair the remote control with a new device:

1. Press and hold the "OK" button and the Volume "-" button simultaneously until the indicator light on the remote control begins to flash.
2. Keep the remote control within 1 meter of the target device (e.g., TV box, Android stick) for faster pairing.
3. Open the target device. The device should automatically detect and pair with the remote control. A successful pairing will be indicated.

If your device's original remote control Bluetooth name is not "Remoter ATV3", you may need to manually open Bluetooth settings on your device and search for "Remoter ATV3" to pair.




“ BT Remote Control ”

The remote control supports Bluetooth connectivity for seamless operation.

5. OPERATING INSTRUCTIONS

5.1 Voice Control

The remote control features a voice control function. To use it, press and hold the dedicated voice key (often marked with a microphone icon) and speak your command or search query. Release the button when finished.

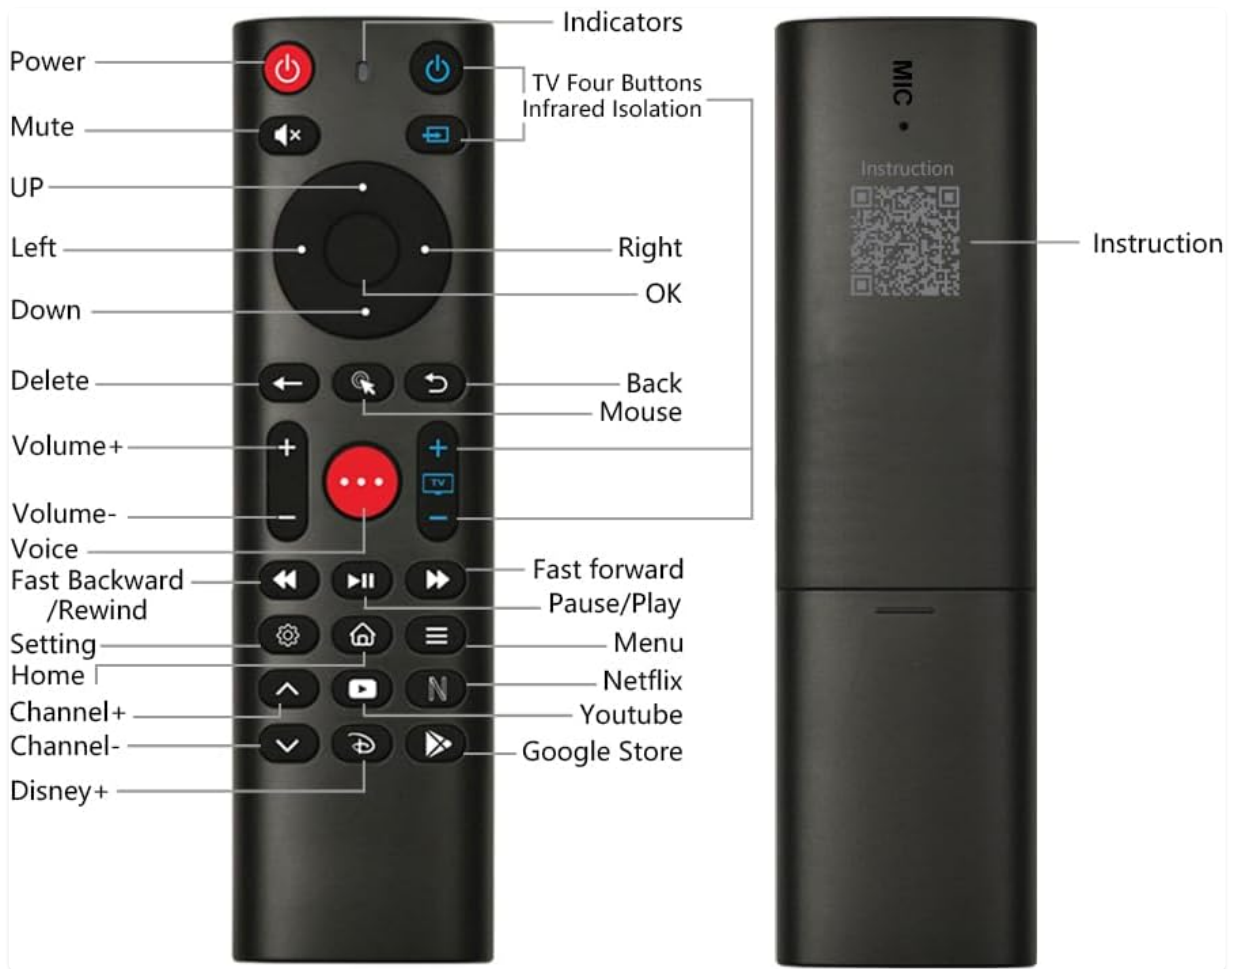

Press the voice button to activate voice commands.

5.2 Infrared (IR) Learning

The Remoter ATV3 can learn IR codes from other remote controls, allowing you to consolidate functions. This is particularly useful for the four dedicated TV buttons.



The remote control can learn infrared signals from other remotes.

Steps for IR Learning:

1. Press and hold the button on the Remoter ATV3 that you wish to program for 8 seconds until its indicator light flashes, then release. The indicator light will remain on after flashing.
2. Align the IR emitter of your original remote control with the IR receiver of the Remoter ATV3 (typically at the top). Press the corresponding button on your original remote that you want the Remoter ATV3 to learn.
3. The indicator light on the Remoter ATV3 will flash, indicating successful learning.
4. Repeat steps 1-3 to program other buttons.

IR Learning Notes:

- The four dedicated TV buttons (Power, Input, Volume Up, Volume Down) have default IR values compatible with Samsung TVs. These can be reprogrammed via IR learning.
- For Q3 and Q5 compatible devices, the 4 TV buttons can learn Samsung and TCL IR codes. Other buttons on the remote may not be programmable via IR learning for these specific devices.
- For AOSP remote control compatibility, all buttons can be programmed via IR learning.
- If no IR learning is performed, all buttons will retain their default values.

TV Four Buttons Infrared Isolation



The four TV buttons can be programmed using IR learning.

To Reset IR Learning:

Press and hold the "Delete" button and the "Back" button simultaneously until the indicator light flashes. This will reset all learned IR codes.

5.3 General Operation Notes

- IR and Bluetooth functions cannot be used simultaneously, with the exception of the four dedicated TV buttons.
- Avoid using mouse mode on the Google account login screen, as the "OK" button may not be compatible in this specific scenario.

6. PRODUCT OVERVIEW: BUTTON LAYOUT



Front and back view of the Remoter ATV3 with labeled buttons.

The image above illustrates the layout and function of each button on the BOXPUT Remoter ATV3 remote control. Key buttons include:

- **Power (Red):** Device power on/off.
- **Mute:** Mute/unmute audio.

- **Navigation Pad (UP, DOWN, LEFT, RIGHT, OK):** For menu navigation and selection.
- **Volume +/-:** Adjust volume.
- **Voice Control (Red button with three dots):** Activates voice commands.
- **Back:** Returns to the previous screen.
- **Home:** Returns to the main home screen.
- **Menu:** Opens context-sensitive menus.
- **Fast Backward/Rewind, Play/Pause, Fast Forward:** Media playback controls.
- **Dedicated App Buttons (Netflix, YouTube, Disney+, Google Store):** Quick access to popular applications.

7. COMPATIBILITY

The BOXPUP Remoter ATV3 is compatible with a range of devices, including:

- TV Box Q5
- TV Box Q5 Plus
- TV Box Q10
- Lemon TV mini
- L1
- L2
- Android Stick Q3
- Android Stick Q3 MAX



The remote is compatible with devices like the iATV Stick Q3.



The remote also works with devices such as the iATV Q5 PLUS.

8. TROUBLESHOOTING

- **Remote Not Responding:** Ensure batteries are correctly installed and have sufficient charge. Re-attempt Bluetooth pairing.

- **IR Learning Failure:** Ensure the IR emitters of both remotes are closely aligned during the learning process. Repeat the steps carefully.
- **"OK" Button Not Working in Google Login:** As noted in section 5.3, avoid using mouse mode during the Google account login screen.
- **IR and Bluetooth Conflict:** Remember that IR and Bluetooth functions generally cannot be used simultaneously, except for the four TV buttons.

9. SPECIFICATIONS

Parameter	Value
Model Number	Remoter ATV3
Wireless Range	5-10 meters
Material	ABS
Color	Black
Weight	69g
Size (L x W x H)	16.5 x 4.6 x 2 cm (6.44"L x 1.79"W x 0.78"H)
Voice Remote Control	Yes
Bluetooth Low Energy (BLE)	Yes
Four-button IR Isolation	Yes
Gyroscope	No
Backlight	No
Batteries Required	2 AAA batteries

10. OFFICIAL PRODUCT VIDEO

Your browser does not support the video tag.

This video demonstrates the air mouse functionality of the BOXPUT Remoter ATV3 remote control.

11. SUPPORT

If you encounter any operational or usage issues that cannot be resolved using this manual, please contact BOXPUT Official Support. Our technical team is available to assist you.

- **For TV Box / TV Stick Issues:** When contacting support, please provide your device's MAC address for quicker assistance.
- **For Remote Issues:** Describe the issue in detail when contacting support.

