

ZEBRONICS Rocket 200

Zebronics Rocket 200 Portable Wireless Speaker User Manual

Model: Rocket 200

1. INTRODUCTION

The Zebronics Rocket 200 is a portable wireless speaker designed to deliver a high-quality audio experience. This manual provides detailed instructions for setting up, operating, and maintaining your speaker to ensure optimal performance.

2. WHAT'S IN THE BOX

- 1 x Zebronics Rocket 200 Bluetooth Speaker
 - 1 x Charging Cable
-

3. PRODUCT FEATURES

- **20W Output with Deep Bass:** Equipped with dual 5.08cm drivers and a passive radiator for powerful sound and enhanced bass.
- **Multi-connectivity:** Supports Bluetooth v5.1, USB, AUX, and FM radio.
- **Karaoke Function:** Features a 6.3mm wired microphone input for karaoke.
- **True Wireless Stereo (TWS):** Connect two Rocket 200 speakers for a stereo audio experience.
- **Call Function:** Built-in microphone for hands-free calling.
- **Long Playback Time:** Up to 6 hours of playback on a single charge (at 50% volume).
- **Type-C Charging:** Modern and convenient charging port.
- **Portable Design:** Stylish fabric finish with an aluminum alloy carry handle.



This image highlights the speaker's powerful audio capabilities, featuring deep bass, a 20W output, and dual 5.08cm drivers for rich sound.




The rear panel of the speaker displays various input options including a microphone port, USB port, DC 5V charging port, and an AUX input for versatile connectivity.

4. SETUP

4.1 Initial Charging

Before first use, fully charge the speaker. Connect the provided Type-C charging cable to the speaker's DC 5V

port and the other end to a USB power adapter (not included). The charging indicator will show the charging status. A full charge takes approximately 3 hours.

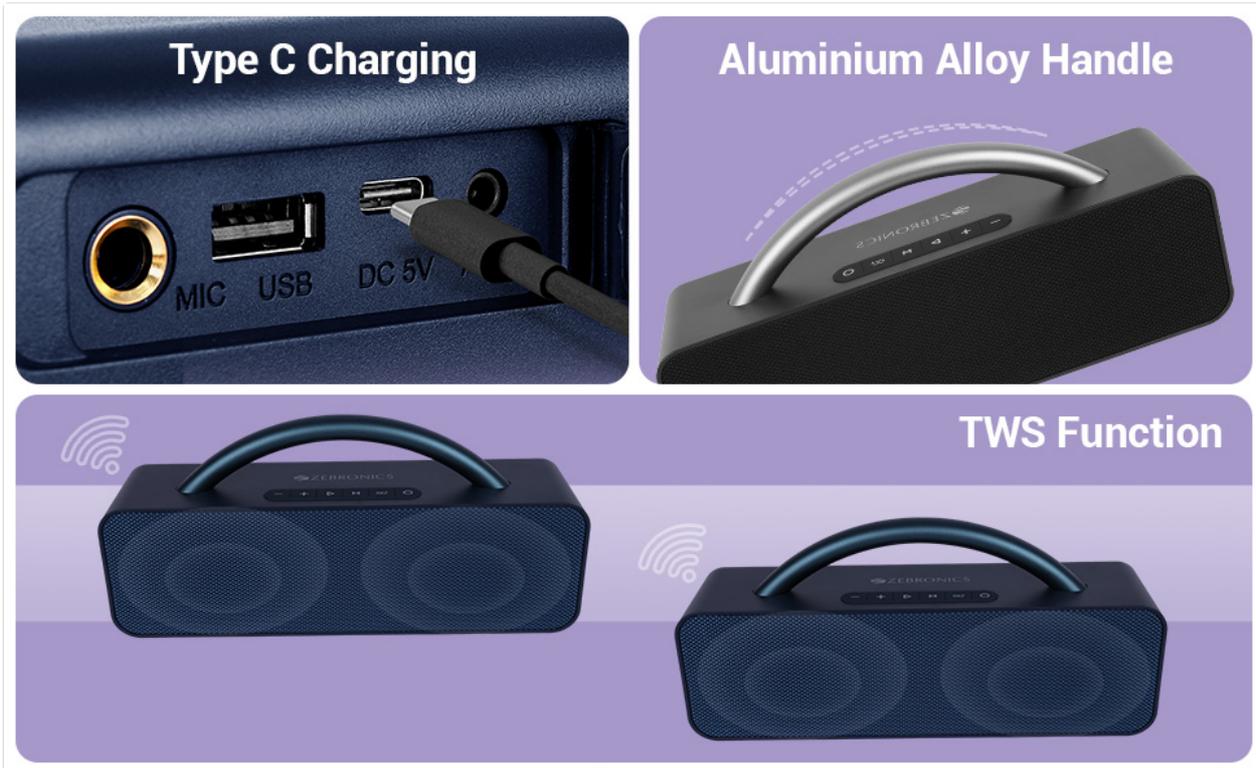

A detailed view of the Type-C charging port, indicating modern and convenient charging for the speaker.

4.2 Powering On/Off

Press and hold the power button on the speaker to turn it ON or OFF.

5. OPERATING INSTRUCTIONS

5.1 Bluetooth Pairing

1. Turn on the speaker. It will automatically enter Bluetooth pairing mode.
2. Enable Bluetooth on your smartphone or other device.
3. Search for "ZEB-ROCKET 200" in the list of available devices and select it to pair.
4. Once paired, the speaker will indicate a successful connection.

5.2 FM Radio

1. Turn on the speaker and press the 'M' (Mode) button to switch to FM mode.
2. Press the Play/Pause button once to auto-scan and save available FM channels.
3. Use the Previous/Next track buttons to navigate through the saved channels.

5.3 USB Playback


1. Insert a USB flash drive (max. 32GB) containing MP3/WAV/WMA audio files into the USB port.
2. The speaker will automatically switch to USB mode and begin playback.

5.4 AUX Input

1. Connect one end of a 3.5mm audio cable (not included) to the AUX port on the speaker.
2. Connect the other end to the audio output of your device (e.g., smartphone, MP3 player).
3. The speaker will automatically switch to AUX mode.

5.5 True Wireless Stereo (TWS) Function


1. Ensure both Zebronics Rocket 200 speakers are turned ON and in Bluetooth mode.
2. On one speaker, press and hold the TWS button (often indicated by an infinity symbol or two interlocking circles).
3. The speakers will connect to each other. Once connected, they will function as a stereo pair.
4. Now, connect your device to the primary speaker via Bluetooth as described in section 5.1.

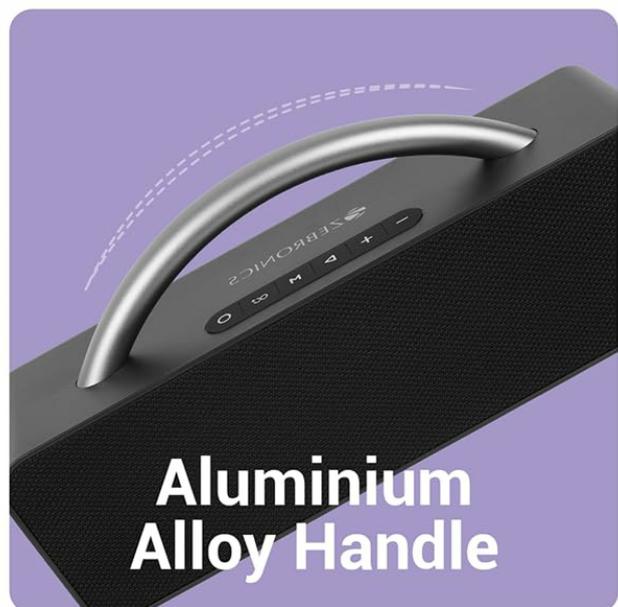

Two Zebronics Rocket 200 speakers are shown paired together, demonstrating the True Wireless Stereo (TWS) function for an enhanced stereo audio experience.

5.6 Karaoke Function (Microphone Input)

1. Connect a wired microphone (not included) to the 6.3mm MIC input port on the speaker.
2. Adjust the microphone volume using the speaker's controls or the microphone's own controls if available.

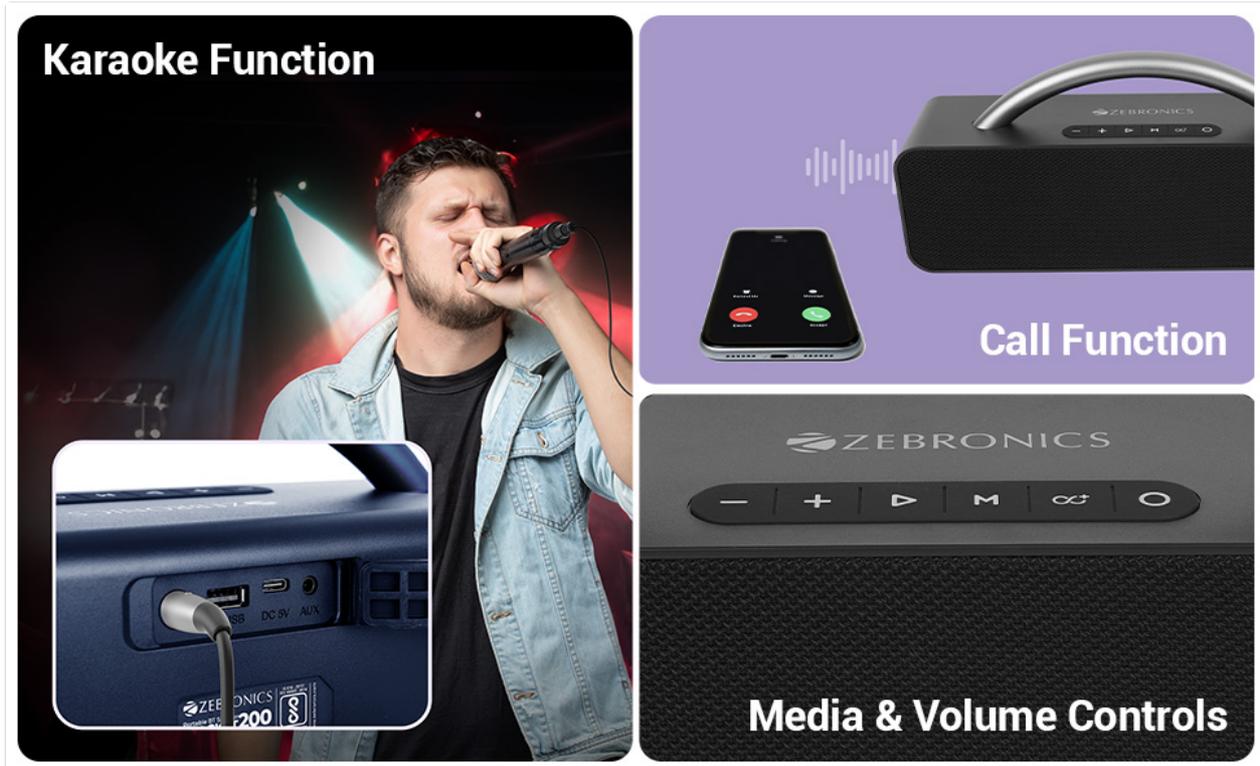


A person is shown using a microphone with the speaker, demonstrating the integrated karaoke function for entertainment.

5.7 Call Function

1. When connected to a smartphone via Bluetooth, the speaker can be used for hands-free calls.
2. Press the Play/Pause button to answer an incoming call.
3. Press the Play/Pause button again to end a call.



Call Function

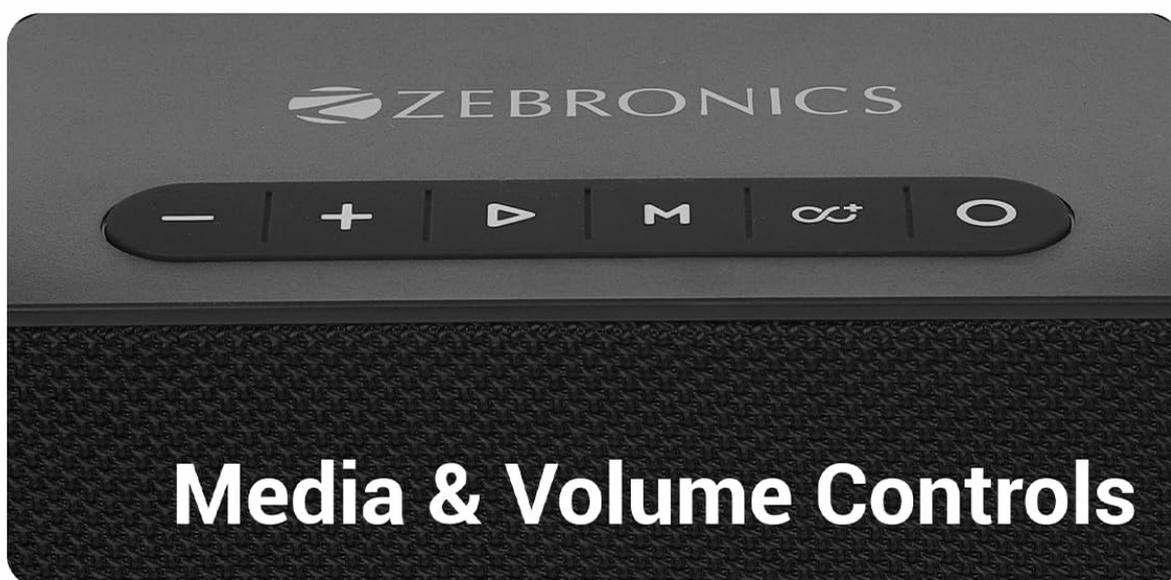

Media & Volume Controls

This image illustrates the speaker's call function, allowing users to answer calls directly through the device when connected to a smartphone.

5.8 Media & Volume Controls

Use the dedicated buttons on the speaker to control playback (play/pause, next/previous track) and adjust the volume.

6. CHARGING AND BATTERY

The speaker features a built-in rechargeable battery. Connect the Type-C charging cable to the DC 5V port for charging. A full charge takes approximately 3 hours and provides up to 6 hours of playback time at 50% volume. The battery average life is 3 hours under typical usage conditions.



This image emphasizes the speaker's portability with a built-in rechargeable battery offering up to 6 hours of playback time on a single charge.

7. MAINTENANCE

- Clean the speaker with a soft, dry cloth. Do not use harsh chemicals or abrasive materials.
- Keep the speaker away from water and moisture. It is not waterproof.
- Avoid exposing the speaker to extreme temperatures.
- Store the speaker in a cool, dry place when not in use.

8. TROUBLESHOOTING

Problem	Possible Solution
Speaker does not turn on.	Ensure the battery is charged. Connect the speaker to a power source using the charging cable.
Cannot pair via Bluetooth.	Make sure the speaker is in Bluetooth pairing mode. Disable and re-enable Bluetooth on your device. Ensure no other devices are connected to the speaker.
No sound.	Check the volume levels on both the speaker and your connected device. Ensure the correct input mode (Bluetooth, USB, AUX) is selected.
Poor FM reception.	Relocate the speaker to an area with better signal. Auto-scan for channels again.
TWS pairing fails.	Ensure both speakers are in Bluetooth mode and close to each other. Try resetting both speakers and repeating the TWS pairing steps.

9. SPECIFICATIONS

Feature	Detail
Brand	ZEBRONICS
Model Number	Rocket 200
Speaker Maximum Output Power	20 Watts
Connectivity Technology	Bluetooth v5.1
Audio Output Mode	Stereo
Enclosure Material	Aluminum
Woofer Driver Diameter	5.08 Centimetres
Battery Average Life	3 Hours (up to 6 hours playback at 50% volume)
Battery Charge Time	3 Hours
Is Waterproof	False (Not Water Resistant)
Item Dimensions (D x W x H)	8D x 23W x 10H Centimeters
Item Weight	710 Grams
Compatible Devices	Tablet, Smartphone

10. WARRANTY AND SUPPORT

10.1 Warranty Information

The Zebronics Rocket 200 comes with a **1-year carry-in warranty** to the service center. Please retain your purchase receipt for warranty claims.

10.2 Customer Support

For any product-related queries, technical assistance, or warranty support, please contact Zebronics customer service. Refer to the official Zebronics website or your product packaging for the most up-to-date contact information.

