

[Manuals.plus](#) /

> [SineRise](#) /

> SineRise LED Modern Bathroom Vanity Light Fixture (3-Light, 24-Inch, Dimmable) - Instruction Manual

SineRise H0001-18 (3-Light, 24-Inch, Dimmable)

SineRise LED Modern Bathroom Vanity Light Fixture (3-Light, 24-Inch, Dimmable) - Instruction Manual

Model: H0001-18

1. INTRODUCTION

Thank you for choosing the SineRise LED Modern Bathroom Vanity Light Fixture. This manual provides essential information for the safe installation, operation, and maintenance of your new lighting fixture. Please read these instructions thoroughly before installation and retain them for future reference.



Image 1: SineRise 3-Light, 24-Inch Chrome Dimmable Vanity Light Fixture.

2. IMPORTANT SAFETY INFORMATION

- Always turn off the main power supply at the circuit breaker before beginning installation or maintenance.
- This fixture is designed for indoor use only.

- Ensure all electrical connections comply with local codes and ordinances. If you are unsure about wiring, consult a qualified electrician.
- The power driver is quality approved following ETL/UL standards, and lamp fixture parts follow CE/ROHS/QCQ standards.
- The fixture has an IP44 waterproof and dust-proof capacity, making it suitable for humid environments like bathrooms.
- Do not attempt to modify the fixture. Any modifications may void the warranty and create a safety hazard.

3. WHAT'S IN THE BOX

Verify that all components are present and undamaged before proceeding with installation.

- 1 x SineRise 3-Light Dimmable Vanity Light Fixture
- 1 x Instruction Manual
- 1 x Installation Hardware Kit

4. PRODUCT SPECIFICATIONS

Feature	Detail
Brand	SineRise
Model Number	H0001-18
Size	3-Light, 24-Inch
Color	Chrome- Dimmable
Material	Acrylic, Metal
Style	Modern
Product Dimensions	23.62"L x 5.12"W x 4.33"H
Light Source Type	LED
Wattage	24 watts
Brightness	1620 Lumen
Color Temperature	6000 Kelvin (Cool White)
Special Feature	Dimmable
Installation Type	Wall Mount
Water Resistance Level	IP44 (Water Resistant)
Certifications	ETL, UL

5. SETUP AND INSTALLATION

This vanity light is designed for easy installation. Follow these general steps. Refer to the included

installation hardware kit and diagram for detailed instructions.

1. **Prepare the Area:** Turn off power at the circuit breaker. Ensure the mounting surface is clean and dry.
2. **Mount the Bracket:** Secure the mounting bracket to the wall junction box using the provided screws.
3. **Wire the Fixture:** Connect the fixture's wires to your household wiring (live to live, neutral to neutral, ground to ground) using the wire nuts from the hardware kit.
4. **Attach the Fixture:** Carefully align the fixture with the mounting bracket and secure it with the provided screws.
5. **Restore Power:** Turn the power back on at the circuit breaker and test the light.

Your browser does not support the video tag.

Video 1: SineRise Bathroom Vanity Light - Chrome. This video demonstrates the appearance and features of the light fixture, including its rotatable design.

Your browser does not support the video tag.

Video 2: SineRise Bathroom Vanity Light. This video showcases the light fixture in various settings and highlights its adjustable features.

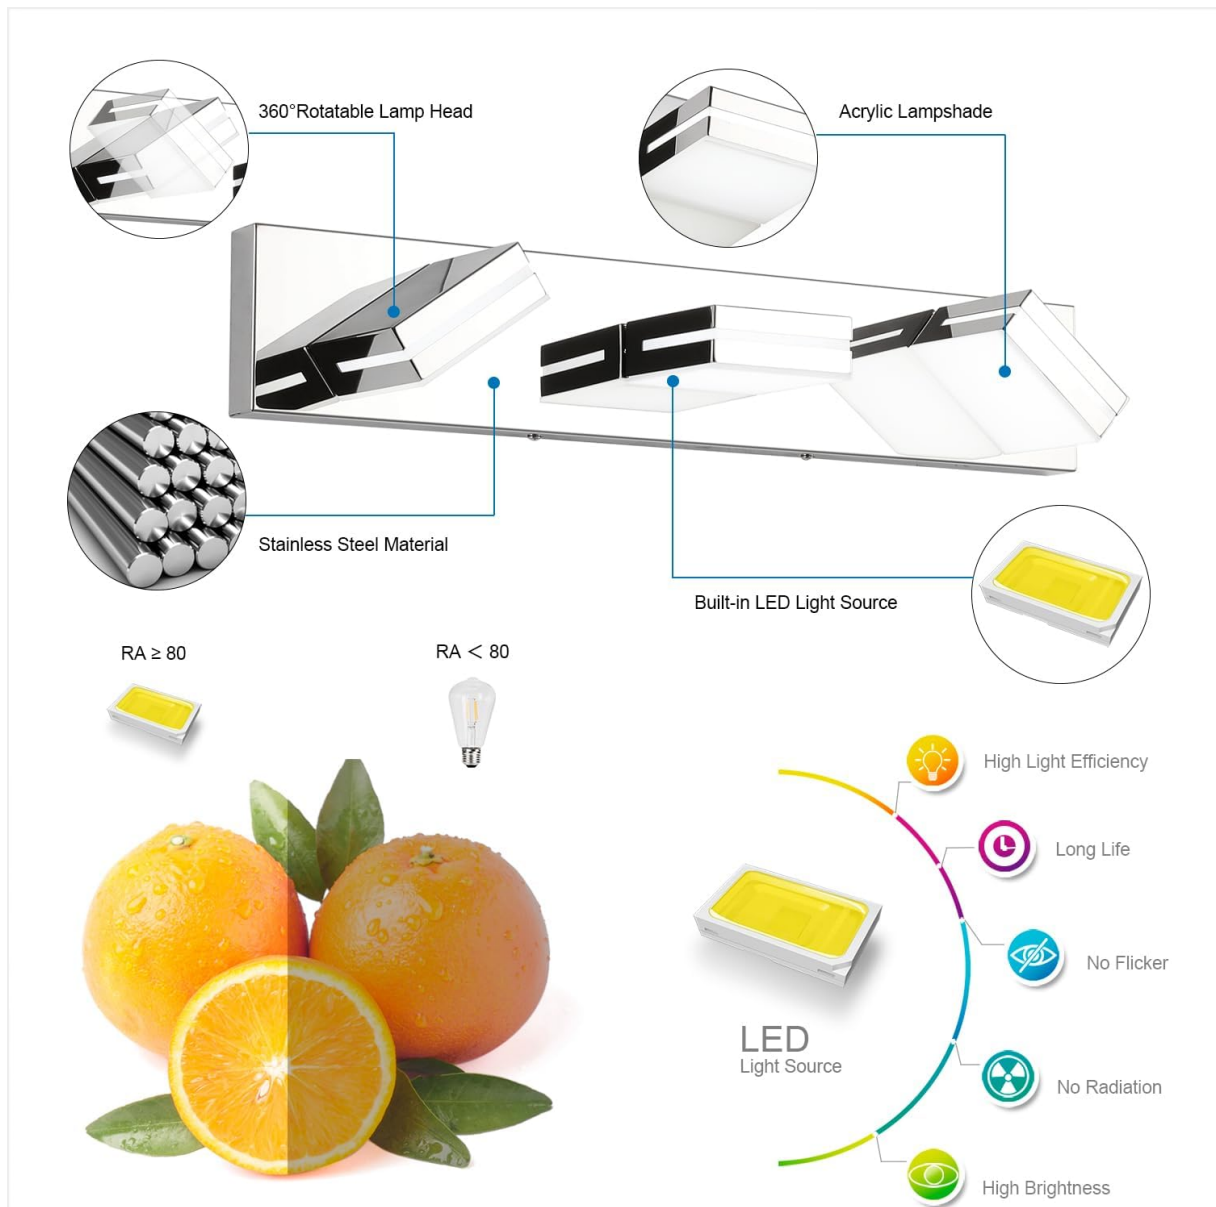


Image 2: Component diagram of the SineRise Vanity Light, highlighting the rotatable lamp heads, acrylic lampshade, stainless steel material, and built-in LED light source.

6. OPERATING INSTRUCTIONS

6.1 Power On/Off

Operate the light fixture using a standard wall switch connected to the electrical circuit. For dimmable models, ensure you use a compatible dimmer switch.

6.2 Dimmable Functionality

This fixture is dimmable. To utilize the dimming feature, connect it to a compatible dimmer switch (not included). Adjust the dimmer switch to achieve your desired brightness level.



Image 3: Illustration of the dimmable functionality, showing the light intensity adjustable from bright to dark using a dimmer switch.

6.3 Rotatable Lamp Design

The individual lamp heads feature a 360° rotatable joint. This allows you to easily adjust the direction of the light to different positions as desired, providing versatile illumination for various tasks like applying makeup.

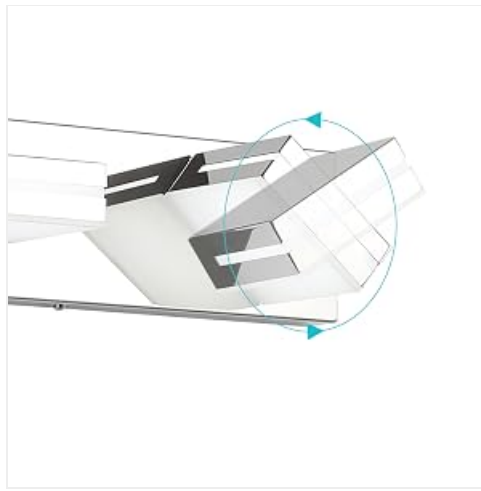


Image 4: Close-up of the rotatable lamp head, demonstrating its 360° adjustment for directional lighting.

7. MAINTENANCE

- **Cleaning:** Always disconnect power before cleaning. Use a soft, dry cloth to wipe the fixture. Do not use abrasive cleaners or solvents, as they may damage the finish.
- **LED Lifespan:** The built-in LED light source has an estimated lifespan of 54,000 hours and does not require bulb replacement.

8. TROUBLESHOOTING

- **Light does not turn on:**
 - Check if the power supply is connected and the circuit breaker is on.
 - Ensure all wiring connections are secure.
 - Verify the wall switch is in the ON position.
- **Light flickers:**
 - Ensure the dimmer switch (if used) is compatible with LED fixtures.
 - Check for loose wiring connections.
- **Insufficient brightness:**
 - If using a dimmer, ensure it is set to maximum brightness.
 - Confirm the fixture's wattage and lumen output meet your room's requirements.

9. WARRANTY AND SUPPORT

SineRise provides a 12-Month Replacement warranty for this product. For any questions, concerns, or warranty claims, please contact SineRise customer support through the retailer where the product was purchased or visit the official SineRise website.

For more information and other products, visit the [SineRise Store](#).

