

[Manuals.plus](#) /

> [Asnxcju](#) /

> Asnxcju Modern Outdoor Ceiling Light Fixtures User Manual

Asnxcju Newest 2-Light

Asnxcju Modern Outdoor Ceiling Light Fixtures User Manual

Model: Newest 2-Light

1. IMPORTANT SAFETY INFORMATION

Please read and understand all instructions before beginning installation. Failure to do so may result in electric shock, fire, or other injuries that could be fatal or cause serious damage.

- Always turn off power at the main circuit breaker before installation or maintenance.
- Consult a qualified electrician if you are unsure about the installation process.
- This fixture is designed for 120 Volts. Ensure your electrical supply matches this requirement.
- Handle glass components with care to prevent breakage.
- While designed for outdoor use under eaves, avoid direct exposure to heavy rain or standing water.
- Do not exceed the maximum wattage of 60 watts per bulb.
- Ensure all connections are secure and properly insulated.

2. PACKAGE CONTENTS

Verify that all components are present and undamaged before proceeding with installation.

- 1 x 2-Light Black Flush Mount Ceiling Light Fixture
- 1 x Mounting Hardware Kit (screws, wire nuts, mounting bracket)
- 2 x E26 ST64 4W LED Bulbs
- 1 x Installation Instruction Manual



Image: The Asnxcju Modern Outdoor Ceiling Light Fixture, showcasing its black metal frame, clear glass panels, and two included vintage-style LED bulbs.



3. SPECIFICATIONS

| Feature | Detail |
|------------------------|--|
| Brand | Asnxcju |
| Model Name | Newest 2-Light |
| Dimensions (L x W x H) | 9.84" x 9.84" x 4.92" (25cm x 25cm x 12.5cm) |
| Material | Metal, Glass |
| Finish Type | Matte Black |
| Light Source Type | LED, Energy Efficient, Incandescent, Halogen |
| Bulb Base | E26 |
| Max Wattage per Bulb | 60 Watts |

| | |
|----------------------|--|
| Voltage | 120 Volts |
| Included Bulbs | 2 x E26 ST64 4W LED (2700K Warm White) |
| Installation Type | Flush Mount |
| Indoor/Outdoor Usage | Outdoor (under eaves), Indoor |
| Special Feature | Dimmable (with compatible dimmer switch) |

2-Light Glass Ceiling Light Fixtures

2xE26 LED Filament Bulbs Included

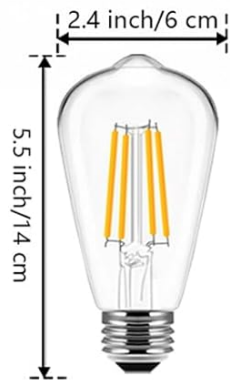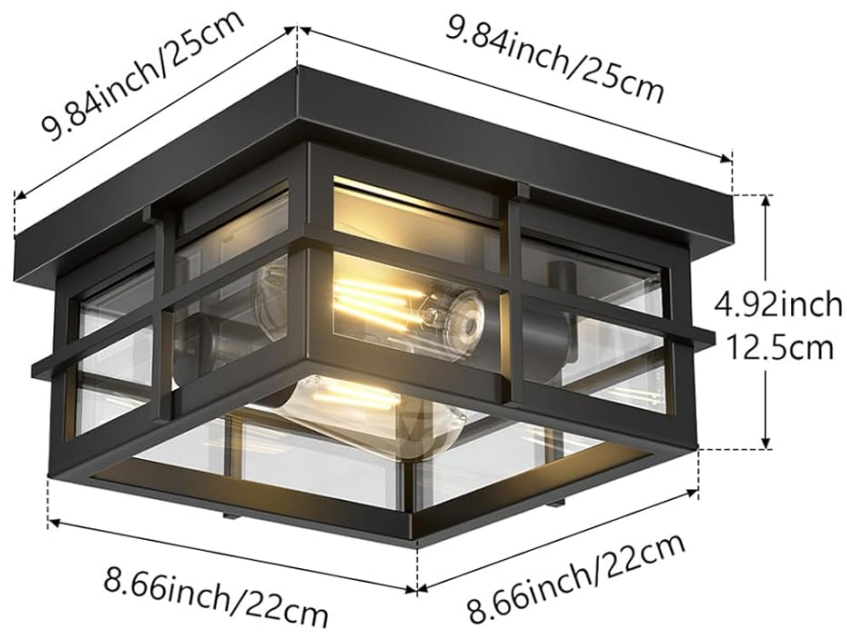








-  Bulb Type: ST64
-  Color Temperature: 2700K
-  Bulb Voltage: 110V-130V
-  Bulb Wattage: 4W
-  Bulb Base: E26
-  Beam Angle: 360 No Darkness
-  Dimmable: Yes

Image: Detailed specifications and dimensions of the Asnxcju ceiling light fixture and its included E26 ST64 LED bulbs.

4. SETUP AND INSTALLATION

Follow these steps carefully for safe and proper installation. It is recommended to have two people for installation.

4.1 Tools Required (Not Included)

- Phillips Head Screwdriver

- Flat Head Screwdriver
- Wire Strippers
- Electrical Tape
- Ladder
- Safety Glasses

4.2 Installation Steps

1. **Turn Off Power:** Before starting, ensure the power to the circuit you are working on is turned off at the main circuit breaker or fuse box.
2. **Prepare Mounting Surface:** If replacing an existing fixture, carefully remove it. Ensure the junction box is securely mounted and capable of supporting the fixture's weight.
3. **Attach Mounting Bracket:** Secure the mounting bracket (included in hardware kit) to the junction box using the provided screws. Ensure the bracket is firm and level.
4. **Wire Connections:**
 - Connect the *green or bare copper ground wire* from the fixture to the *ground wire* from the junction box using a wire nut.
 - Connect the *white (neutral) wire* from the fixture to the *white (neutral) wire* from the junction box using a wire nut.
 - Connect the *black (live) wire* from the fixture to the *black (live) wire* from the junction box using a wire nut.
 - Ensure all wire nuts are tightly secured and connections are insulated with electrical tape if necessary.
5. **Mount the Fixture:** Carefully align the fixture with the mounting bracket and secure it using the provided screws. Ensure the fixture is flush against the ceiling and stable.
6. **Install Bulbs:** Gently screw the two E26 ST64 LED bulbs into the lamp holders. Do not overtighten.
7. **Restore Power:** Once the fixture is securely installed and bulbs are in place, turn the power back on at the main circuit breaker. Test the light fixture.


Exquisite Details



Sturdy Anti-rust
Metal Frame



Ceramic
Lamp Holder



Premium Clear
Glass Shade



Adjustable Degree
Lamp Cap

Image: Detailed view of the fixture's components, including the robust metal frame, clear glass, ceramic lamp holder, and adjustable lamp cap, which are key for installation and durability.

5. OPERATING INSTRUCTIONS

The Asnxcju Modern Outdoor Ceiling Light Fixture is designed for simple operation.

- **Power On/Off:** Control the light fixture using a standard wall switch connected to the circuit.
- **Dimmable Functionality:** This fixture is dimmable. To utilize dimming capabilities, ensure you have a compatible dimmer switch installed on your wall and use dimmable E26 bulbs (the included bulbs are dimmable).
- **Bulb Replacement:** The open bottom design allows for easy bulb replacement. Simply unscrew the old bulb and screw in a new E26 base bulb (max 60W).



Image: Examples of the light fixture's versatile application in a kitchen, living room, and bedroom, demonstrating its aesthetic appeal in different indoor environments.



Image: The light fixture installed on a covered outdoor porch, highlighting its suitability for exterior areas protected from direct weather.

6. MAINTENANCE

Regular maintenance will help preserve the appearance and functionality of your light fixture.

- **Cleaning:** Turn off the power before cleaning. Use a soft, dry cloth to wipe down the metal frame. For glass panels, a mild glass cleaner can be used, applied to the cloth first, not directly to the fixture. Avoid abrasive cleaners or solvents.
- **Bulb Replacement:** As needed, replace E26 bulbs. Ensure the power is off before replacing bulbs.
- **Inspection:** Periodically check for any loose connections or signs of wear. If any damage is observed, discontinue use and consult a qualified electrician.

7. TROUBLESHOOTING

If you encounter issues with your light fixture, refer to the following common problems and solutions:

| Problem | Possible Cause | Solution |
|---------|----------------|----------|
|---------|----------------|----------|

| | | |
|--------------------------------------|--|--|
| Light does not turn on. | <ul style="list-style-type: none"> o No power to the fixture. o Loose wire connections. o Faulty bulb. o Faulty wall switch. | <ul style="list-style-type: none"> o Check circuit breaker. o Turn off power, check wire connections. o Replace bulb with a known good one. o Test wall switch or consult electrician. |
| Light flickers or dims unexpectedly. | <ul style="list-style-type: none"> o Loose bulb. o Incompatible dimmer switch. o Loose wire connections. | <ul style="list-style-type: none"> o Tighten bulb. o Ensure dimmer switch is compatible with LED bulbs. o Turn off power, check wire connections. |
| Humming noise from fixture. | <ul style="list-style-type: none"> o Incompatible dimmer switch. o Loose components. | <ul style="list-style-type: none"> o Replace dimmer with a high-quality LED compatible dimmer. o Turn off power, check for any loose parts within the fixture. |

If the problem persists after trying these solutions, please contact customer support.

8. WARRANTY AND SUPPORT

Asnxcju is committed to providing high-quality products and excellent customer service.

- **Warranty:** If your farmhouse light fixture experiences defects or malfunctions within 1 year of purchase, Asnxcju is dedicated to replacing the entire product.
- **Customer Support:** If you encounter any problems with the product, please contact us. We aim to provide a satisfactory solution within 24 hours.
- For further assistance, please visit the official Asnxcju Store: [Asnxcju Store on Amazon](#).