

## KCO L1150-A

# KCO Lighting L1150-A Mid-Century Modern Gold Globe Pendant Light

## INSTRUCTION MANUAL

### 1. Important Safety Information

Please read these instructions carefully before installation and retain them for future reference. Installation should be performed by a qualified electrician to ensure safety and compliance with local electrical codes.

- **Electrical Safety:** Always turn off the main power supply at the circuit breaker before beginning any electrical work.
- **Voltage:** This fixture is designed for 110-220V electrical systems. Ensure your home's voltage matches this requirement.
- **Bulb Type:** Use only E26 base bulbs with a maximum wattage of 60W. For dimming functionality, a dimmable E26 bulb and a compatible dimmer switch are required (not included).
- **Indoor Use Only:** This product is intended for indoor use in dry locations. Do not install in wet or damp environments.
- **Handling Glass:** The glass shade is fragile. Handle with care during unpacking and installation to prevent breakage.

### 2. Package Contents

Verify that all components are present before beginning installation:

- Pendant Light Fixture (with milk white glass globe shade and brass gold canopy)
- Mounting Hardware (screws, wire nuts, mounting plate)
- Instruction Manual

**Note:** E26 light bulb is not included and must be purchased separately.

### 3. Product Specifications

Feature	Specification
Brand	KCO
Model Number	L1150-A
Color	White-A (Brushed Brass, White Opal Glass)
Material	Glass, Metal
Product Dimensions	9.8"L x 9.8"W x 12"H (Fixture only)
Adjustable Hanging Height	Up to 59.1 inches (150cm)
Canopy Diameter	4.7 inches (12cm)
Light Source Type	LED (compatible)
Bulb Base	E26
Maximum Wattage	60 Watts
Voltage	110-220 Volts
Control Method	Push Button (compatible with dimmer switch for dimmable bulbs)
Weight	3.85 pounds

The KCO Lighting L1150-A pendant light features a unique ribbed glass shade and a brushed brass finish, offering a modern aesthetic suitable for various indoor settings.

### 4. Setup and Installation

Follow these general steps for installing your pendant light. Consult a qualified electrician if you are unsure about any part of the process.

- 1. Prepare for Installation:** Turn off power at the circuit breaker. Ensure the mounting surface is structurally sound to support the fixture's weight.
- 2. Attach Mounting Plate:** Secure the mounting plate to the junction box in the ceiling using the provided screws.
- 3. Adjust Hanging Height:** The pendant light comes with an adjustable cord. Determine your desired hanging height and adjust the cord length accordingly. Excess cord can be stored within the canopy.
- 4. Wire Connections:** Connect the fixture's wires to your home's electrical wires (typically black to black, white to white, and ground to ground) using wire nuts.
- 5. Secure Canopy:** Carefully push the canopy up to the ceiling, covering the junction box, and secure it with the provided screws.
- 6. Install Bulb:** Screw an E26 base bulb (not included) into the socket.
- 7. Restore Power:** Turn the power back on at the circuit breaker.

This pendant light is compatible with various ceiling types, including flat, sloped, and vaulted ceilings, thanks to its flexible hanging cord design.

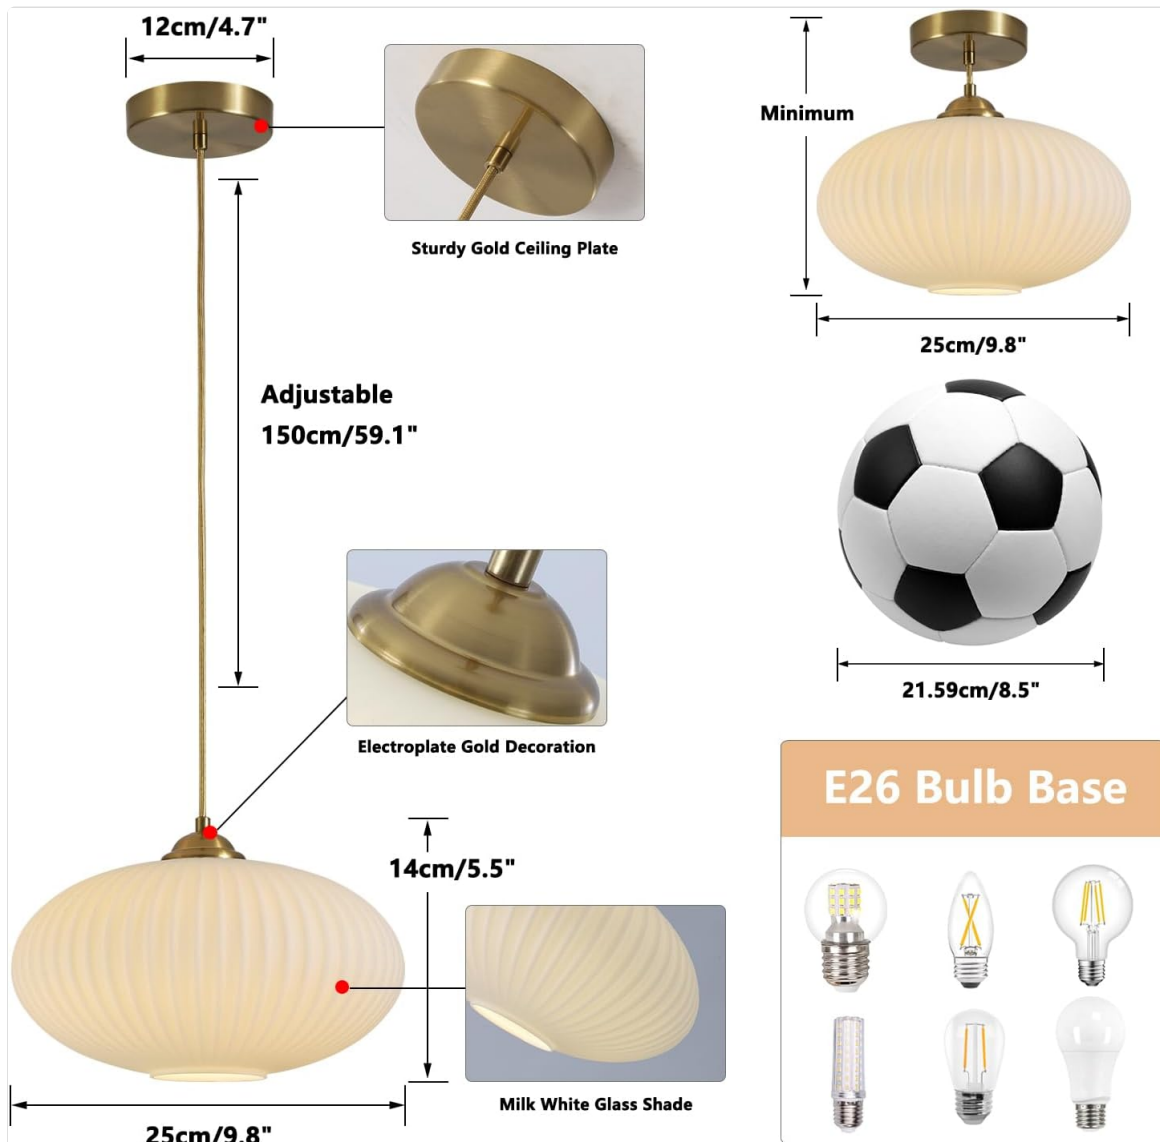


Figure 1: Product Dimensions and Key Components. This diagram illustrates the physical measurements and main parts of the pendant light, including the adjustable cord length and canopy size.

# ADJUSTABLE HEIGHT



Figure 2: Adjustable Hanging Height. The pendant light's cord can be adjusted to suit different ceiling heights, from low ceilings to high ceilings, allowing for versatile placement.

*Why to choose*  
**KCO**

 **3-YEAR WARRANTY**  
Contact us for free replacement if you have any quality issues.

 **PROFESSIONAL SERVICES**  
If you meet any problem, we will provide you with the solution within 24 hours.

 **CUSTOMIZATION SERVICE**  
Some products provide customized service, please feel free to contact us for consultation.



Figure 3: Ceiling Compatibility. This image demonstrates the fixture's adaptability for installation on various ceiling

angles, including flat, sloped, and vaulted designs.

## 5. Operating Instructions

Once installed, operating your KCO Lighting pendant light is straightforward.

- **Turning On/Off:** Use your wall switch to turn the light fixture on or off.
- **Dimming Functionality:** If you have installed a dimmable E26 bulb and a compatible dimmer switch, you can adjust the light intensity by operating the dimmer switch.

### DIMMING DESIGN SHOWCASE

It would be dimmable when using dimmable bulb and dimmer switch



Figure 4: Dimming Design Showcase. This illustration demonstrates the light fixture's appearance when off and with different color temperatures (pure white, neutral white, warm white) when a dimmable bulb is used.

Video 1: KCO Lighting Milk Glass Pendant Light Series. This video showcases various models within the milk glass pendant light series, demonstrating their aesthetic and how the light appears when illuminated.

## 6. Maintenance and Care

Proper care will help maintain the appearance and functionality of your pendant light.

- **Cleaning:** Always turn off power before cleaning. Use a soft, dry cloth to wipe the metal and glass surfaces. Avoid abrasive cleaners or solvents that could damage the finish.

- **Bulb Replacement:** Ensure the power is off and the bulb has cooled before attempting to replace it. Unscrew the old E26 bulb and screw in a new one.
- **Regular Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

## 7. Troubleshooting

If you encounter issues with your pendant light, refer to the following common problems and solutions:

- **Light Does Not Turn On:**
  - Check if the power is on at the circuit breaker.
  - Ensure the bulb is securely screwed into the socket and is not burnt out.
  - Verify all wire connections are secure.
- **Light Flickers:**
  - Ensure the bulb is fully screwed in.
  - If using a dimmable bulb, confirm it is compatible with your dimmer switch.
  - Check for loose wire connections.
- **Glass Shade is Damaged:** If the glass shade is broken, damaged, or cracked upon arrival, do not attempt to install or use the product. Contact customer support for a replacement.

For issues not resolved by these steps, please contact KCO Lighting customer support.

## 8. Warranty and Support

KCO Lighting offers a **3-year after-sale service** for this product. If you receive a broken, damaged, or cracked globe glass lampshade, or experience any quality issues, please contact KCO Lighting directly through your order number for prompt assistance and replacement.

For further support or inquiries, please reach out to the seller, "KCO Lighting", via your purchase order details.