Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

ARZOPA A1M

ARZOPA 17.3" Portable Monitor User Manual

Brand: ARZOPA | Model: A1M

Product Overview

The ARZOPA 17.3" Portable Monitor is designed to enhance your productivity and entertainment on the go. Featuring a 1080P FHD 103% sRGB IPS screen, it delivers vibrant colors and sharp visuals for an immersive experience. Its lightweight and ultra-slim design, coupled with a built-in kickstand, makes it an ideal companion for various devices and scenarios.



Figure 1: ARZOPA 17.3" Portable Monitor - Front View

Key Features:

- **Immersive Visuals:** Expansive 17.3" 1080P FHD 103% sRGB IPS screen for vibrant colors and high gamut color accuracy, ideal for gaming and multimedia.
- **Versatile Flexibility:** Built-in kickstand allows seamless switching between landscape and portrait modes, with adjustable viewing angles for optimal comfort.
- **Universal Compatibility:** Equipped with Type C and mini HDMI ports for broad compatibility with laptops, PCs, smartphones, and gaming consoles (PS5, Xbox).
- **Multi-Display Modes:** Supports duplicate, extend, and second screen modes to enhance productivity and creativity across various setups.
- **Effortless Setup:** Plug-and-play functionality with a single USB-C cable for video signal and power (full-featured USB-C port required for phones).

Setup Guide

Setting up your ARZOPA portable monitor is straightforward. Follow these steps to connect your device.

Connecting to Devices:

- **For Laptops/PCs with Full-Featured USB-C:** Connect the monitor to your device using a single USB-C to USB-C cable. This cable will transmit both video signal and power.
- **For Laptops/PCs with HDMI:** Connect the monitor using a mini HDMI to HDMI cable for video. For power, connect a USB-A to USB-C cable from your device or a power adapter to the monitor's USB-C port.
- **For Smartphones (with Full-Featured USB-C):** Use a USB-C to USB-C cable for video and power. An external power supply may be needed for stable operation or phone charging.
- **For Gaming Consoles (PS5, Xbox, Switch):** Connect via mini HDMI for video. An external power supply (5V/2A or above) connected via USB-A to USB-C is required for power.



Figure 2: Universal Compatibility with various devices.

Ensure all cables are securely connected. The monitor is plug-and-play and should automatically detect the input signal.

Operating Instructions

The ARZOPA monitor offers various display modes and adjustable settings to optimize your viewing experience.

Display Modes:

- **Duplicate Mode:** Mirrors your primary screen, showing the same content on both displays. Ideal for presentations or sharing content.
- **Extend Mode:** Extends your desktop, allowing you to have different content on each screen. Perfect for multitasking and expanding your workspace.
- **Second Screen Mode:** Uses only the portable monitor as the display, turning off the primary screen.

You can typically switch between these modes through your operating system's display settings (e.g., Windows Display Settings, macOS System Preferences > Displays).

Adjusting Settings:

The monitor features control buttons on its side for quick adjustments. These typically include:

- **Power Button:** To turn the monitor on/off.
- **Volume Control:** Adjusts the audio output from the built-in speakers.
- **Brightness/Contrast:** Dedicated buttons or an On-Screen Display (OSD) menu button to fine-tune display brightness and contrast.
- **OSD Menu Button:** Accesses the full OSD menu for advanced settings like color temperature, display modes, sharpness, and more. Navigate the menu using the volume/brightness buttons.

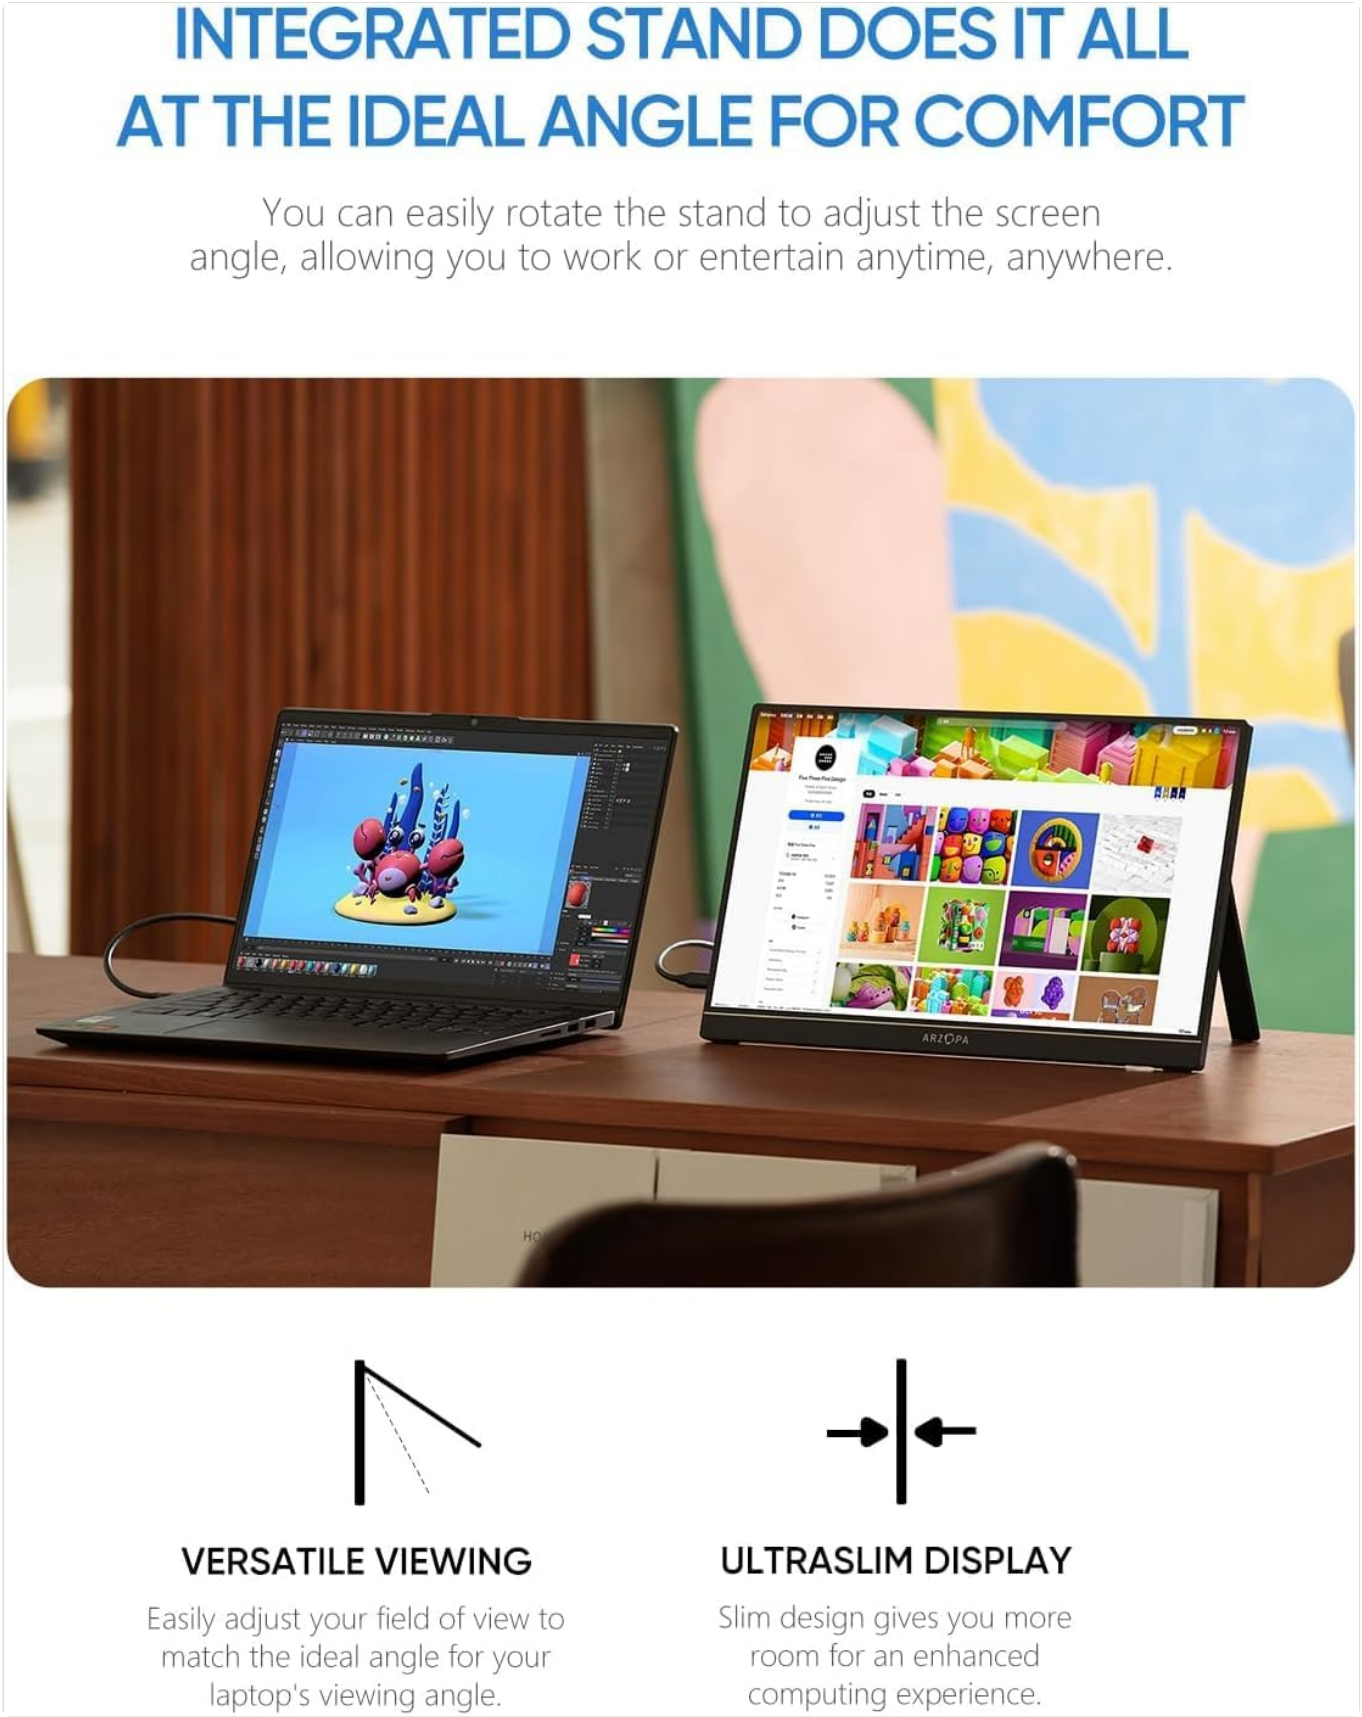


Figure 3: Integrated stand for versatile viewing angles.

Maintenance and Care

Proper maintenance ensures the longevity and optimal performance of your ARZOPA portable monitor.

- **Cleaning the Screen:** Use a soft, lint-free cloth slightly dampened with water or a non-abrasive screen cleaner. Avoid harsh chemicals or abrasive materials that could damage the screen surface.
- **Cleaning the Body:** Wipe the monitor's body with a soft, dry cloth.

- **Storage:** When not in use, store the monitor in its protective case to prevent scratches and dust accumulation. Avoid placing heavy objects on top of it.
- **Handling:** Handle the monitor with care, avoiding drops or impacts that could damage internal components or the screen.

Troubleshooting

If you encounter issues with your ARZOPA portable monitor, refer to the following common troubleshooting tips:

- **No Signal/Black Screen:**
  - Ensure all cables (USB-C, HDMI, power) are securely connected to both the monitor and your device.
  - Verify that your device's display output is enabled and configured correctly (e.g., extended or duplicate mode).
  - If using a phone, ensure its USB-C port supports video output (full-featured USB-C).
  - Try a different cable or port on your device if available.
- **No Power:**
  - Ensure the power cable is connected and the power adapter (if used) is plugged into a working outlet.
  - If powering via USB-C from a laptop, ensure the laptop has sufficient power output.
- **Display Settings Issues:**
  - Access the monitor's OSD menu to adjust brightness, contrast, or color settings.
  - Check your device's display settings to ensure the correct resolution and refresh rate are selected for the external monitor.
- **Audio Issues:**
  - Ensure the monitor's volume is not muted or set too low via the side buttons or OSD menu.
  - Check your device's audio output settings to ensure sound is directed to the ARZOPA monitor.

For further assistance, please refer to the official ARZOPA support resources.

Technical Specifications

Feature	Specification
Product Dimensions	3.94 x 1.97 x 0.5 inches
Item Weight	3.54 pounds
Model Number	A1M
Date First Available	August 31, 2023
Manufacturer	ARZOPA
Screen Display Size	17.3 inches
Aspect Ratio	16:9
Resolution	1920 x 1080 Pixels (FHD 1080p)

Image Brightness	300cd/m2
Total USB Ports	2 (USB-C)
Screen Surface Description	Glossy

Warranty and Support

The ARZOPA portable monitor typically comes with a manufacturer's warranty. Please refer to the warranty card included in your product packaging for specific terms and conditions, including warranty duration and claim procedures.

For product support, technical assistance, or warranty claims, please visit the official ARZOPA website or contact their customer service directly. Contact information can usually be found on the warranty card or the brand's official website.

Visit the ARZOPA Store on Amazon

© 2023 ARZOPA. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CH9Y9SV3

More documents and user manuals: **https://manuals.plus/**