



[Manuals.plus](#) /

> [Sceptre](#) /

> Sceptre 27-inch Gaming Monitor User Manual

Sceptre E275W-FW100T

Sceptre 27-inch Gaming Monitor User Manual

Model: E275W-FW100T

INTRODUCTION

This user manual provides comprehensive instructions for the Sceptre E275W-FW100T 27-inch Gaming Monitor. It covers setup, operation, maintenance, and troubleshooting to ensure optimal performance and longevity of your device. Please read this manual thoroughly before using the monitor.



Figure 1: Sceptre 27-inch Gaming Monitor (E275W-FW100T)

SAFETY INFORMATION

To ensure safe operation and prevent damage, observe the following precautions:

- Do not expose the monitor to rain or moisture.
- Do not open the monitor casing; refer all servicing to qualified personnel.
- Place the monitor on a stable, flat surface to prevent accidental falls.
- Ensure proper ventilation around the monitor to prevent overheating.
- Use only the power adapter supplied with the monitor.
- Avoid placing heavy objects on the power cord.

PACKAGE CONTENTS

Verify that all items are present in the package:

- Sceptre 27-inch Gaming Monitor (E275W-FW100T)
 - Monitor Stand (Base and Neck)
 - Power Adapter
 - HDMI Cable
 - User Manual
 - Warranty Card
-

Elevate Your Performance

100 Hz Refresh Rate & AMD FreeSync™



Figure 2: Monitor Front View

SETUP

1. Assembling the Stand

1. Carefully remove the monitor from its packaging.
2. Attach the stand neck to the monitor panel by aligning the tabs and pushing until it clicks into place.
3. Secure the stand base to the neck using the provided screw.

SCEPTRE

27" 100Hz Gaming Monitor



1920 x 1080
Resolution



100 Hz Max
Refresh Rate



100% sRGB
Color Gamut



Edgeless
Design



Anti-Flicker
Technology

ADAPTIVE SYNC



Figure 3: Stand Assembly Diagram

2. Connecting the Monitor

The monitor supports multiple input options:

- **HDMI:** Connect an HDMI cable from your computer or device to one of the two HDMI ports (HDMI1, HDMI2) on the monitor.
- **DisplayPort (DP):** Connect a DisplayPort cable from your computer or device to the DP port on the monitor.
- **Audio Out:** Connect external speakers or headphones to the 3.5mm audio out jack.

Multi-port Connectivity



Figure 4: Monitor Rear Ports

3. Powering On

Connect the power adapter to the monitor's power input and then to a power outlet. Press the power button on the monitor to turn it on.

OPERATING INSTRUCTIONS

1. On-Screen Display (OSD) Menu Navigation

Use the joystick button located on the back of the monitor to navigate the OSD menu. Press the joystick to enter the menu, and move it up/down/left/right to select options and adjust settings.

2. Picture Settings

- **Brightness:** Adjust the overall luminance of the screen.
- **Contrast:** Adjust the difference between light and dark areas.
- **Color Temperature:** Select from preset color temperatures (e.g., Warm, Cool, User) or customize RGB values.
- **100% sRGB Color Gamut:** This monitor provides a wide color gamut for accurate and vibrant color reproduction.



Figure 5: 100Hz Refresh Rate and 100% sRGB

3. Gaming Features

- **100Hz Refresh Rate:** Provides smoother visuals and reduced motion blur for a more fluid gaming experience.
- **1ms Response Time:** Minimizes ghosting and streaking for clear, sharp images during fast-paced action.
- **AMD FreeSync:** Synchronizes the monitor's refresh rate with your GPU's frame rate to eliminate screen tearing and stuttering.
- **FPS-RTS Game Modes:** Optimized display settings for First Person Shooter (FPS) and Real-Time Strategy (RTS) games.

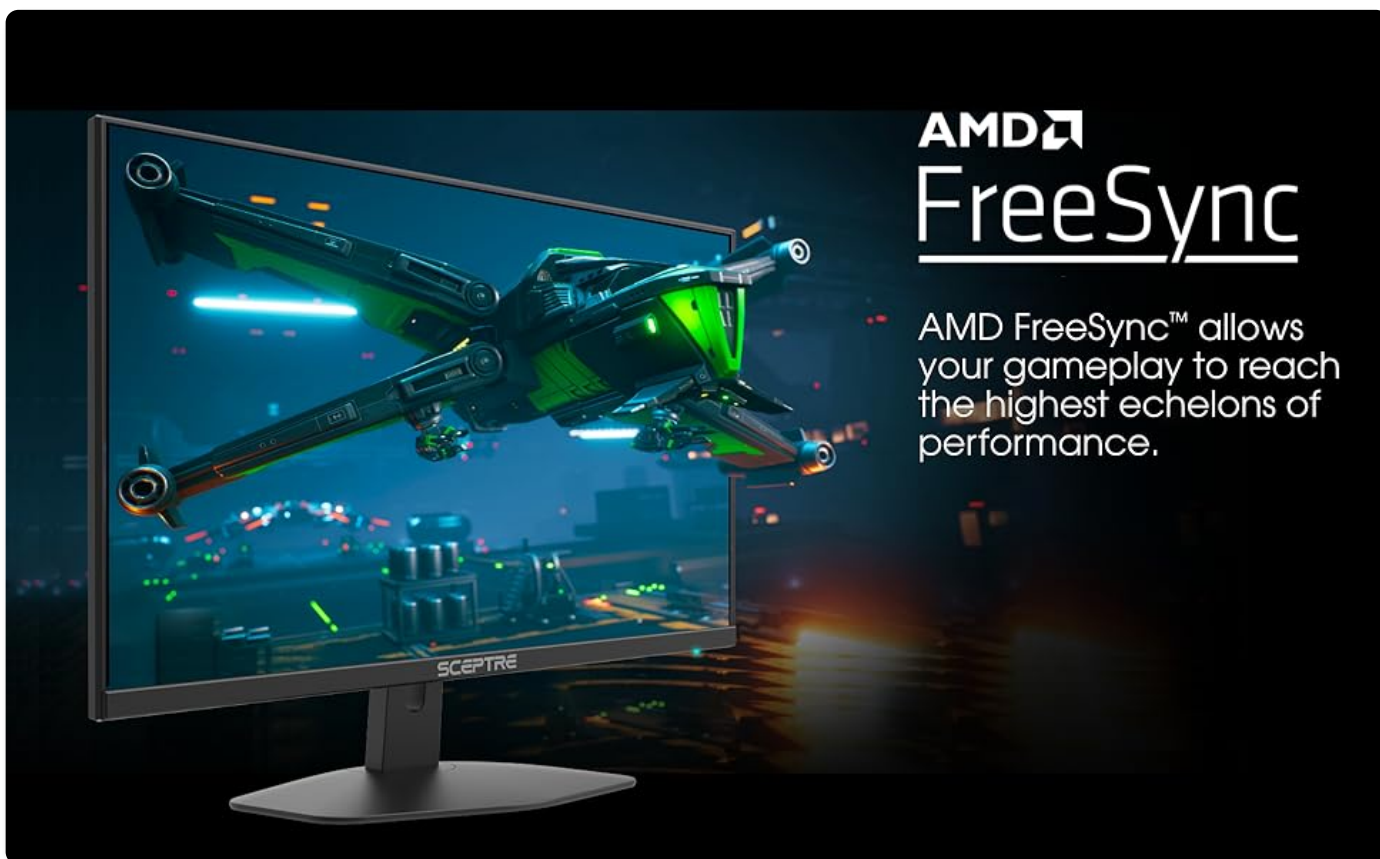


Figure 6: AMD FreeSync Technology

4. Eye Care Features

- **Blue Light Shift:** Reduces harmful blue light emissions to minimize eye strain during prolonged use.

5. Audio Settings

- **Built-in Speakers:** The monitor includes integrated speakers for convenient audio output.
- **Headphone Jack:** Connect headphones or external speakers via the 3.5mm audio out port for private listening or enhanced sound.

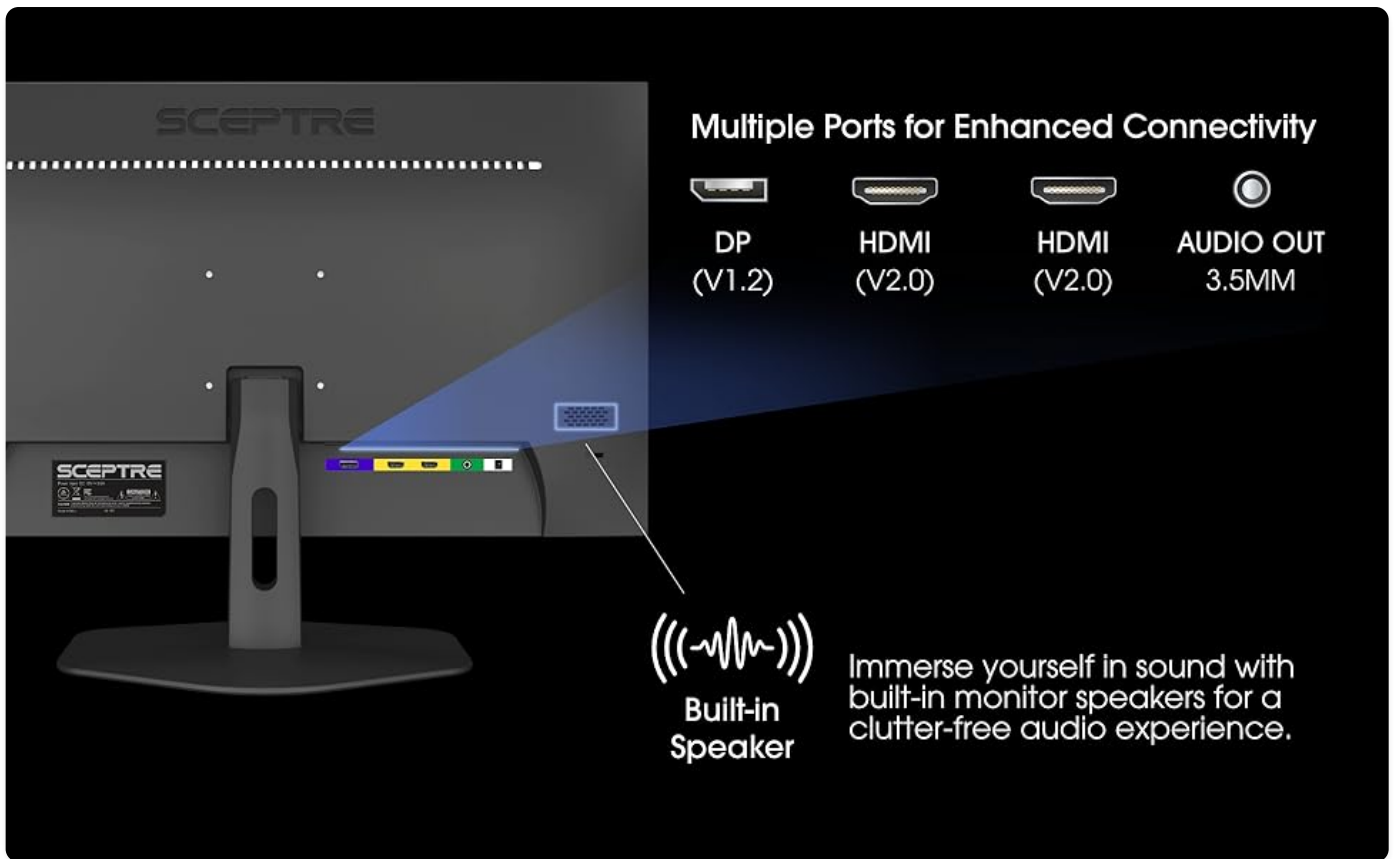


Figure 7: Connectivity and Audio Features

MAINTENANCE

To maintain your monitor's performance and appearance:

- **Cleaning:** Use a soft, lint-free cloth to gently wipe the screen. For stubborn marks, lightly dampen the cloth with water or a mild, non-abrasive screen cleaner.
- **Storage:** When not in use for extended periods, store the monitor in a cool, dry place away from direct sunlight and extreme temperatures.

TROUBLESHOOTING

Problem	Possible Cause	Solution
No image on screen	Power cable disconnected; Input source incorrect	Ensure power cable is securely connected. Select the correct input source (HDMI/DP) via the OSD menu.
Image is blurry or distorted	Incorrect resolution; Loose video cable	Set display resolution to 1920x1080. Check video cable connections.
No sound from speakers	Volume too low; Audio cable disconnected	Increase monitor volume. Ensure audio cable is connected if using external speakers.
Screen tearing/stuttering in games	FreeSync not enabled or compatible	Ensure AMD FreeSync is enabled on both the monitor and your GPU settings. Verify GPU compatibility.

SPECIFICATIONS

- **Screen Size:** 27 Inches
- **Resolution:** 1920 x 1080 (Full HD)
- **Refresh Rate:** Up to 100Hz
- **Response Time:** 1ms
- **Color Gamut:** 100% sRGB
- **Connectivity:** 2 x HDMI (V2.0), 1 x DisplayPort (V1.2), 1 x Audio Out (3.5mm)
- **Mounting:** VESA Wall Mountable
- **Built-in Speakers:** Yes
- **Dimensions (LxWxH):** 7.66 x 24.13 x 17.21 inches
- **Weight:** 7.21 pounds

WARRANTY AND SUPPORT

Sceptre provides a limited warranty for this product. For detailed warranty information, please refer to the warranty card included in your package or visit the official Sceptre website.

For technical support, troubleshooting assistance, or service inquiries, please contact Sceptre Customer Support:

- **Website:** www.sceptre.com
- **Phone:** Refer to your warranty card for regional support numbers.