

EMKE THE330W

EMKE Towel Warmer Heating Element User Manual

Model: THE330W (300W)

1. INTRODUCTION

Thank you for choosing the EMKE Towel Warmer Heating Element. This manual provides essential information for the safe and efficient operation of your device. Please read it thoroughly before installation and use, and retain it for future reference.

2. SAFETY INSTRUCTIONS

- Ensure the power supply matches the specifications of the heating element (230V ± 10%).
- Do not immerse the control unit in water. The device has an IPx4 waterproof rating, meaning it is protected against splashing water, but not full immersion.
- Keep the device away from flammable materials.
- Do not cover the heating element or towel warmer when in operation, as this may cause overheating.
- Always disconnect the power before cleaning or performing any maintenance.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.

3. SETUP AND INSTALLATION

The EMKE heating element is designed for integration with a bathroom towel warmer. Professional installation is recommended to ensure proper and safe operation.

3.1 Package Contents

- EMKE Towel Warmer Heating Element (300W)
- User Manual

3.2 Installation Steps (General Guidelines)

1. Ensure the towel warmer is securely mounted and ready for the heating element.
2. Carefully insert the heating rod into the designated opening of the towel warmer.
3. Tighten the connection securely to prevent leaks.
4. Connect the power cord to a suitable 230V power outlet. The power cord length is approximately 1400 mm.
5. Verify all connections are secure before powering on the device.





Figure 1: EMKE Towel Warmer Heating Element. This image shows the complete heating element with its control unit and coiled power cord.

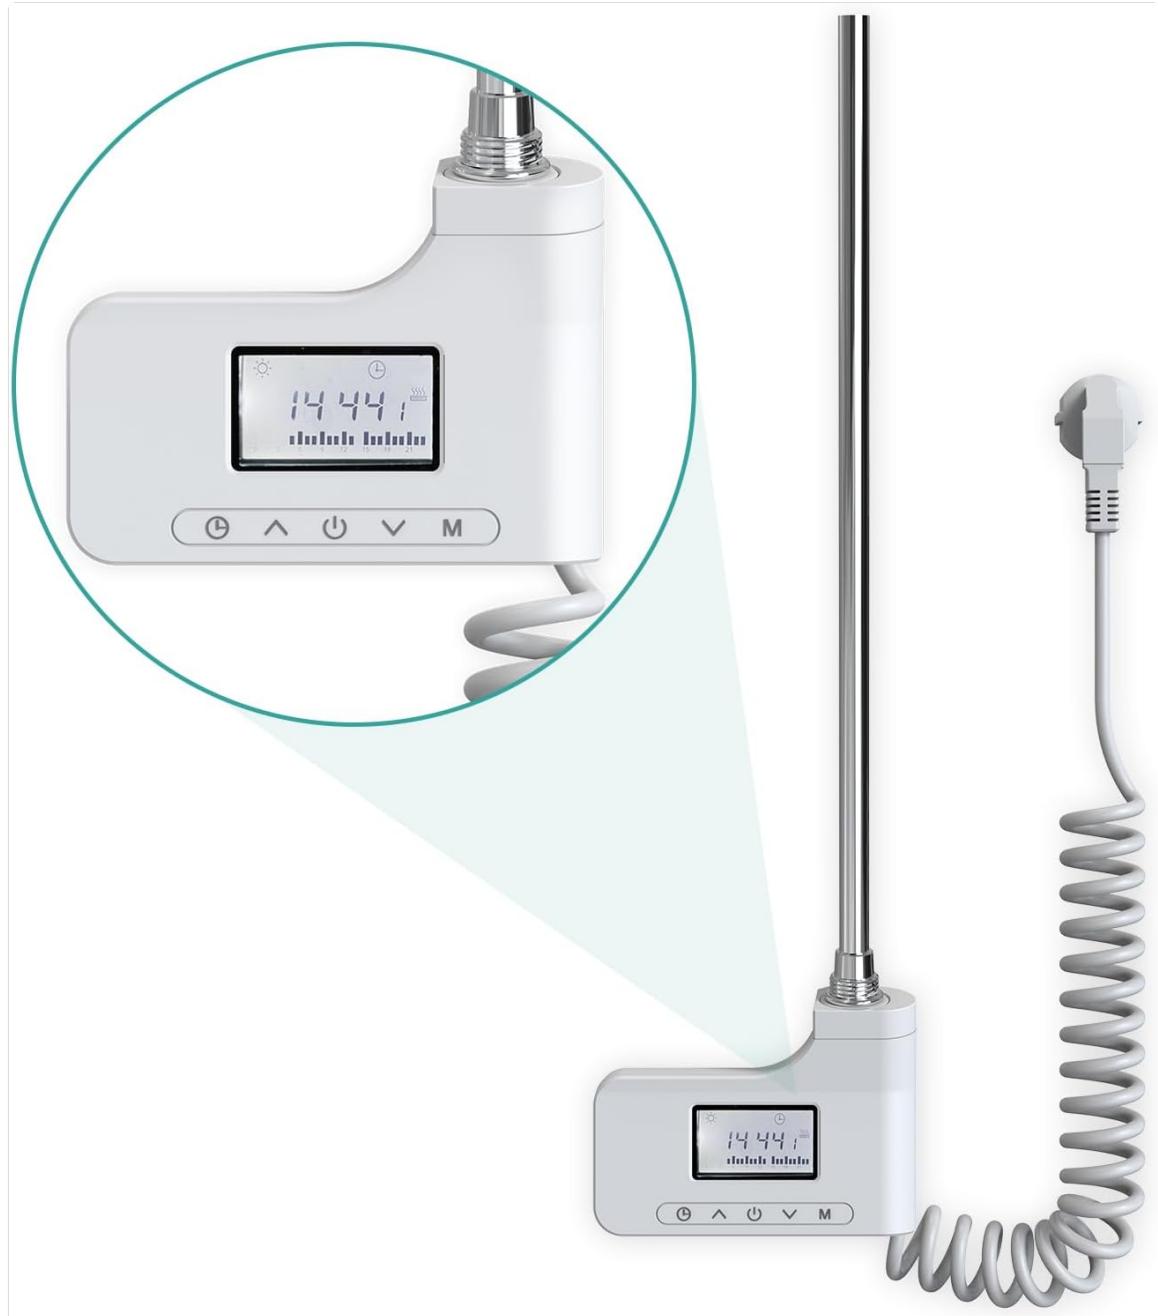


Figure 2: Close-up of the control unit. This image highlights the digital display and control buttons on the heating element's base.

4. OPERATING INSTRUCTIONS

The EMKE heating element features a user-friendly interface with a digital display and multiple operating modes.

Figure 3: Humanized Design. The display and control area are slightly angled to facilitate use and understanding of the heating device's operating status.

4.1 Control Panel Overview

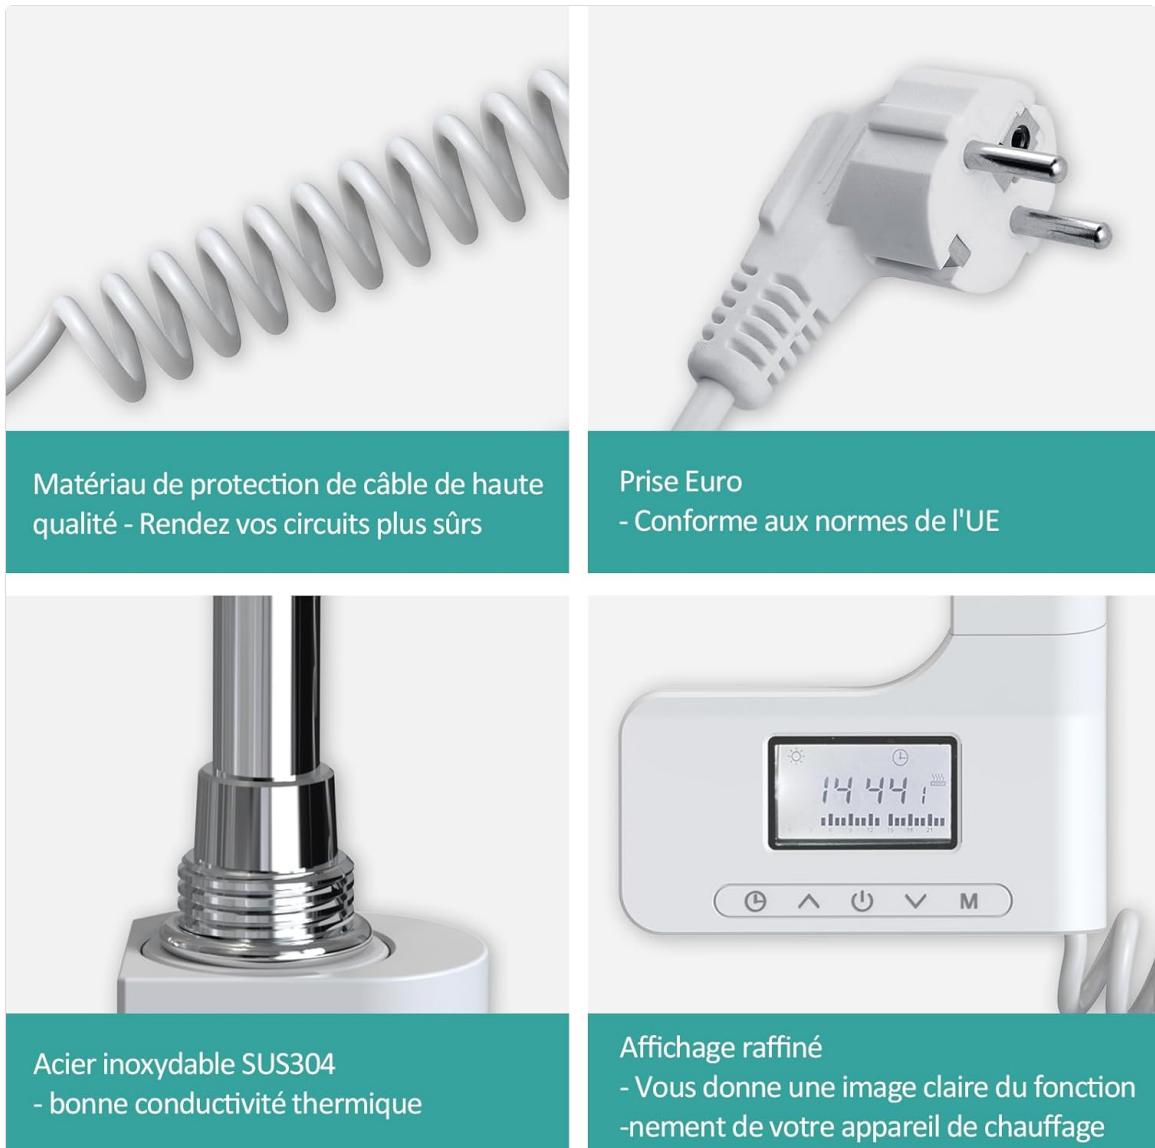


Figure 4: Key features of the heating element. This image shows the high-quality cable protection, Euro plug, SUS304 stainless steel rod, and the refined digital display.

4.2 Operating Modes

The device offers 6 operating modes to suit various needs:



Figure 5: Overview of the six operating modes available on the EMKE heating element.



Figure 6: Detailed explanation of each of the six operating modes, including default temperatures and adjustable ranges.

- **Comfort Mode:** Default temperature is 19 °C, adjustable range 7 to 30 °C. Ideal for continuous comfortable warmth.
- **Economic Mode:** Default temperature is 15 °C, adjustable range 7 to 30 °C. Provides warmth while conserving energy.
- **Antifreeze Mode:** Temperature is fixed at 7 °C and not adjustable. Prevents pipes from freezing in cold environments.
- **Timing Mode:** Allows you to set the device to heat at regular, scheduled intervals.

- **Boost Mode:** Provides continuous heating for a set duration, adjustable from 30 minutes to 24 hours.
- **Holiday Mode:** Allows you to set a specific temperature for your device while you are away, along with the number of days you will be absent.

4.3 Thermostat and Timer Function

The integrated thermostat allows for precise temperature control within the adjustable range (7-30 °C). The timer function enables scheduled operation, enhancing convenience and energy efficiency.

4.4 Child Safety Function

The thermostatic heating rods are equipped with a touch-saver child safety function. This feature helps prevent accidental changes to settings and ensures a safe environment for children.



Figure 7: Child Safety Function. This image illustrates the child safety feature, ensuring the device operates safely around children.

5. MAINTENANCE

Regular maintenance ensures the longevity and efficient operation of your EMKE heating element.

- **Cleaning:** Disconnect the power before cleaning. Wipe the control unit and heating rod with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Inspection:** Periodically check the power cord and plug for any signs of damage. If damage is found, discontinue use and contact customer support.
- **Storage:** If the device will not be used for an extended period, disconnect it from the power supply and store it in a dry, safe place.

6. TROUBLESHOOTING

If you encounter issues with your EMKE heating element, refer to the following common problems and solutions:

- **Device not heating:**

- Check if the device is properly plugged into a working power outlet.
- Ensure the power switch (if any) is turned on.
- Verify that the temperature setting is above the current room temperature.
- Check if any timer or holiday mode settings are preventing heating.

- **Display not working:**

- Ensure the device is receiving power.
- Try unplugging and re-plugging the device to reset it.

- **Inconsistent heating:**

- Ensure the heating element is fully immersed in the towel warmer's fluid (if applicable).
- Check for proper ventilation around the towel warmer.

If the problem persists, please contact customer support.

7. SPECIFICATIONS

Below are the technical specifications for the EMKE Towel Warmer Heating Element (Model THE330W).

Feature	Specification
Model Number	THE330W
Heating Power	300 W
Operating Voltage	230 V ± 10%
Waterproof Rating	IPx4
Cable Length	1400 ± 100 mm
Room Temperature Range	7-30 °C
Material	SUS304 Stainless Steel + ABS
Color	White
Included Components	Electric heating rod
Package Dimensions	51 x 19 x 6 cm
Package Weight	800 g

7.1 Recommended Heating Rod Selection

It is important to choose the correct heating rod power for your radiator to ensure optimal performance and safety. The power cord length is 1400 mm, and it features an EU plug for added safety.

Figure 8: Guide for choosing the correct heating rod based on radiator power, including dimensional diagrams for different wattage models (300W, 600W, 900W, 1200W).

Radiator Power	Recommended Heating Element Power
Less than 600W	300W
600-900W	600W
900-1200W	900W
1200-1500W	1200W

8. WARRANTY

For warranty information, please refer to the documentation included with your purchase or contact EMKE customer service. Typically, warranty covers manufacturing defects under normal use conditions.

9. SUPPORT

If you have any questions, require technical assistance, or need to report an issue, please do not hesitate to contact EMKE customer service. Our dedicated team is ready to assist you.



Figure 9: EMKE Customer Service. Our strong customer service team is your purchase guarantee. Do not hesitate to contact us.

© 2023 EMKE. All rights reserved.

Related Documents - THE330W

	<p><u>EMKE PTR PCTR Electric Towel Rail Installation and User Manual</u></p> <p>Comprehensive installation and user guide for the EMKE PTR PCTR electric towel rail. Learn about setup, operation modes, app connectivity, and troubleshooting for your heated towel rail.</p>
	<p><u>EMKE ESFTR Electric Radiator Instruction Manual</u></p> <p>Comprehensive instruction manual for the EMKE ESFTR Electric Radiator, covering installation, operation, technical specifications, app connectivity, and safety guidelines.</p>



[EMKE PTR PCTR Electric Towel Rail Installation and User Manual](#)

Comprehensive installation and user guide for the EMKE PTR PCTR electric towel rail. Learn about setup, operation modes, app connectivity, and troubleshooting for your heated towel rail.



[EMKE ESFTR Electric Radiator Instruction Manual](#)

Comprehensive instruction manual for the EMKE ESFTR Electric Radiator, covering installation, operation, technical specifications, app connectivity, and safety guidelines.