

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [WEWATCH](#) /

› [WEWATCH S3 Smart Projector User Manual](#)

WEWATCH S3

WEWATCH S3 Smart Projector User Manual

Model: S3

Brand: WEWATCH

1. INTRODUCTION

Thank you for choosing the WEWATCH S3 Smart Projector. This projector integrates an Android operating system, offering a seamless entertainment experience with built-in streaming applications. It features 4K Ultra-HD resolution, 500 ANSI lumens brightness, 20000:1 contrast, electronic focus, 4-point keystone correction, and versatile connectivity options including dual-band WiFi and Bluetooth. This manual provides essential information for setting up, operating, maintaining, and troubleshooting your projector to ensure optimal performance and longevity.

2. SAFETY INFORMATION

Please read all safety instructions carefully before using the projector. Keep this manual for future reference.

- **Power Supply:** Use only the provided power adapter. Ensure the voltage matches the projector's requirements.
- **Ventilation:** Do not block ventilation openings. Ensure adequate airflow around the projector to prevent overheating.
- **Liquid Exposure:** Do not expose the projector to rain, moisture, or any liquids. Avoid placing objects filled with liquids, such as vases, on the projector.
- **Cleaning:** Unplug the projector before cleaning. Use a soft, dry cloth. Do not use liquid or aerosol cleaners.
- **Placement:** Place the projector on a stable, flat surface. Avoid placing it in direct sunlight, near heat sources, or in environments with excessive dust or humidity.
- **Eye Protection:** Do not look directly into the projector lens when the lamp is on, as the bright light can cause eye damage.
- **Servicing:** Do not attempt to service this product yourself. Refer all servicing to qualified service personnel.

3. PACKAGE CONTENTS

Please check the package contents upon unboxing:

- WEWATCH S3 Smart Projector
- Remote Control
- Power Adapter
- HDMI Cable
- User Manual

4. PRODUCT OVERVIEW

Familiarize yourself with the components and ports of your WEWATCH S3 projector.



Front view of the WEWATCH S3 Smart Projector, showcasing the lens and sleek design.

Connectivity Ports



Peut être facilement utilisé pour des conférences/présentations et le cinéma à domicile.

Rear view of the WEWATCH S3 Projector, highlighting the various input and output ports including LAN, USB, HDMI, AV, and headphone jack.

The projector is equipped with multiple ports for diverse connectivity:

- **LAN Port (x1):** For wired internet connection.
- **USB Ports (x2):** For connecting USB drives or other USB devices.
- **HDMI Ports (x2):** For connecting devices like laptops, gaming consoles, or TV sticks.
- **AV Port (x1):** For connecting older audio/video devices.
- **Headphone Jack (3.5mm):** For connecting external audio devices or headphones.

5. SETUP

5.1 Placement and Screen Size

Position the projector on a stable surface. The projection distance determines the screen size. You can achieve a large screen size of up to 300 inches.



Écran Ajustable Énorme de 60" à 300"

Illustration showing recommended projection distances for various screen sizes, from 60 inches at 1.8m to 300 inches at 3m.

5.2 Power Connection

Connect the power adapter to the projector's power input and then plug it into a wall outlet. Press the power button on the projector or remote control to turn it on.

5.3 Electronic Focus

Achieve a clear image quickly using the electronic focus function. Use the F+ and F- buttons on the remote control to adjust the focus until the image is sharp.



Correction de Keystone

Correction Verticale Automatique & Correction Trapézoïdale à 4 Points

Image demonstrating the remote control's F+ and F- buttons for electronic focus adjustment, and the visual effect of keystone correction on the projected image.

5.4 Keystone Correction

The projector supports 4-point keystone correction and automatic vertical correction to ensure a rectangular image, regardless of the projection angle. Adjust these settings in the projector's menu if needed.

5.5 Zoom Function

The zoom function allows you to reduce the image size from 100% to 80% without moving the projector. This can be adjusted via the projector's settings menu.



Visual representation of the projector's zoom function, showing how the image size can be reduced from 100% to 50% without physically moving the projector.

6. OPERATING

6.1 Android OS and Built-in Applications

The WEWATCH S3 features an integrated Android operating system, providing direct access to popular streaming services like Netflix, YouTube, Prime Video, Disney+, and KODI. When using these applications, switch the remote control to mouse mode for optimal navigation. Remember to switch back to normal mode after use.



A user relaxing and watching content projected from the WEWATCH S3, showing the Android interface with icons for Netflix, YouTube, Prime Video, and other streaming applications.

6.2 Wireless Connectivity (WiFi & Bluetooth)

The projector supports dual-band 2.4G+5G WiFi for fast and stable connections with iOS, Android, and Windows devices. Bluetooth functionality allows you to connect external speakers for enhanced audio or Bluetooth headphones for private listening.



WiFi 2.4/5G et Bluetooth à Deux Canaux

60 % de Latence Inférieure par Rapport à D'autres Projecteurs

A person holding a smartphone, wirelessly mirroring its content to the WEWATCH S3 projector, demonstrating the 2.4/5G WiFi and Bluetooth capabilities for seamless content sharing.

6.3 Connecting External Devices

Utilize the HDMI, USB, LAN, and AV ports to connect various external devices such as TV sticks, USB drives, laptops, gaming consoles, or older media players for diverse content playback.

6.4 Bluetooth Speaker Mode

The projector can function as a standalone Bluetooth speaker. Connect your smartphone or other Bluetooth-enabled devices to the projector to play music, utilizing its built-in HiFi 5W speaker.


7. MAINTENANCE

7.1 Dust Box Cleaning

The WEWATCH S3 features a hidden dust box designed to prevent dust from entering the projector. Regularly clean the dust box to maintain optimal performance and image quality.



Boîte à Poussière Cachée

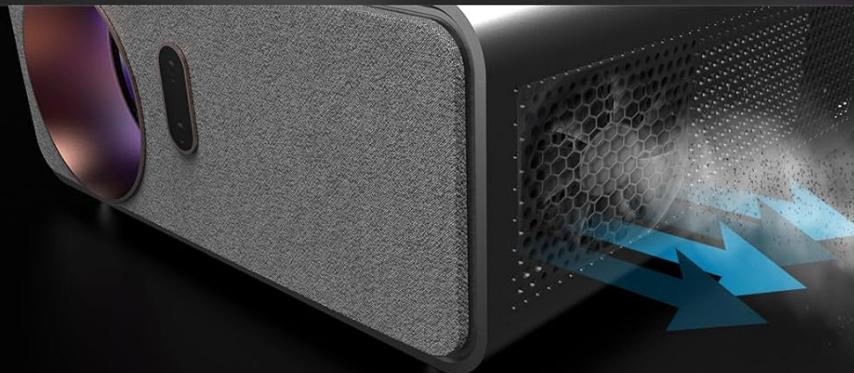

Ventilateur

Nettoyez régulièrement la boîte à poussière pour éviter l'entrée de poussière.

Detailed view of the WEWATCH S3 Projector showing the hidden dust box compartment and the internal fan system, with arrows indicating airflow for cooling.

7.2 General Care

- Keep the projector clean and free from dust.
- Store the projector in a cool, dry place when not in use.
- Avoid touching the lens directly. Use a lens cleaning cloth if necessary.

8. TROUBLESHOOTING

If you encounter issues with your projector, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No image projected	Power cable loose; Input source incorrect; Lens cap on.	Check power connection; Select correct input source (HDMI, USB, etc.); Remove lens cap.

Problem	Possible Cause	Solution
Blurry image	Focus not adjusted; Projector too far/close; Keystone not adjusted.	Adjust electronic focus (F+/F-); Adjust projection distance; Perform keystone correction.
No sound	Volume too low; Muted; External speaker not connected properly.	Increase volume; Unmute; Check external speaker connection or try built-in speaker.
WiFi/Bluetooth connection issues	Incorrect password; Device out of range; Interference.	Verify password; Move device closer; Reduce interference from other devices.
Apps not working correctly	Remote not in mouse mode; App needs update; Internet connection issue.	Switch remote to mouse mode; Check for app updates; Verify internet connection.

9. SPECIFICATIONS

Detailed technical specifications for the WEWATCH S3 Smart Projector:



Visual highlighting key specifications: 500 ANSI lumens, 4K support, and 20000:1 contrast ratio, indicating 85% higher brightness than other LCD projectors.

Feature	Specification
Brand	WEWATCH
Model Number	S3
Color	Grey
Display Resolution	3840 x 2160 (4K Ultra HD)
Brightness	500 ANSI Lumens
Contrast Ratio	20000:1
Operating System	Android OS (with built-in Netflix, YouTube, Prime Video, Disney+, KODI)
Connectivity Technology	Bluetooth, Ethernet, HDMI, Wi-Fi (2.4G+5G dual-band)
Special Features	Electronic Focus, 4-Point Keystone Correction, Automatic Vertical Correction, Zoom (80%-100%), Built-in Speakers, Dust-proof Design
Screen Size	Up to 300 inches
Audio	Integrated HiFi 5W Speaker, Bluetooth Speaker Mode
Dimensions	24.3L x 24.9W x 10.5H cm
USB Ports	2

10. WARRANTY AND SUPPORT

WEWATCH products come with a standard manufacturer's warranty. For detailed warranty information, technical support, or service inquiries, please refer to the warranty card included in your package or visit the official WEWATCH website. Please have your product model number (S3) and purchase information ready when contacting support.

© 2025 WEWATCH. All rights reserved.

Related Documents - S3

	<p>WEWATCH WP01 Smart Projector User Manual</p> <p>Comprehensive user manual for the WEWATCH WP01 Smart Projector, covering setup, troubleshooting, connections, screen mirroring, Bluetooth features, settings, and specifications.</p>
	<p>Audi A3 S3 RS3 Android Car Stereo User Manual</p> <p>Install and operate your Audi A3 S3 RS3 Android car stereo with this comprehensive user manual. Covers installation, wiring, Carplay, Android Auto, basic functions, and troubleshooting.</p>
	<p>Android Car Stereo Instruction Manual for Audi A3 S3 RS3</p> <p>Comprehensive user manual for the CAMECHO Android car stereo system, designed for Audi A3, S3, and RS3 models (2003-2012). Covers installation, wiring diagrams, safety tips, troubleshooting, and features like Apple CarPlay and Android Auto.</p>
	<p>STRONG LEAP-S3: Váš vstup do světa Google TV</p> <p>Oobjevte nový rozměr zábavy s chytrým boxem STRONG LEAP-S3. Tento 4K Ultra HD Android TV™ Box s Google TV™ přináší do vašeho domova streamovací služby, aplikace a inteligentní asistenci.</p>
	<p>eufy FamiLock S3 Max Quick Start Guide and Installation Manual</p> <p>This guide provides step-by-step instructions for installing and setting up the eufy FamiLock S3 Max smart lock, including what's in the box, component identification, installation procedures, app setup, and important notices.</p>