

## Kary KX02D

# Kary Desk Lamp with USB Charging Port

Model: KX02D

User Manual

## 1. INTRODUCTION

Thank you for choosing the Kary Desk Lamp. This modern and versatile lamp is designed to enhance your workspace with its dual-head lighting, customizable settings, and convenient USB charging port. This manual provides essential information for setup, operation, and maintenance to ensure optimal performance and longevity of your lamp.

## 2. IMPORTANT SAFETY INSTRUCTIONS

- Read all instructions carefully before using the lamp.
- Do not disassemble or modify the lamp. Refer all servicing to qualified service personnel.
- Keep the lamp away from water or other liquids. Do not operate in wet conditions.
- Ensure the power cord is not pinched or walked on.
- Unplug the lamp during lightning storms or when unused for long periods.
- Use only with the provided power adapter.
- Avoid direct eye exposure to the LED light source for extended periods.

## 3. WHAT'S IN THE BOX

- Kary Dual-Head Desk Lamp (Main Unit)
- Power Adapter
- Wireless Remote Control (with 1 Lithium Metal battery included)
- User Manual

## 4. ASSEMBLY INSTRUCTIONS

The Kary Desk Lamp requires minimal assembly. Follow these steps to set up your lamp:

1. Carefully unbox all components and place them on a flat, stable surface.

2. Insert the lamp's main pole into the base. Ensure it is securely seated and tightened if there's a screw mechanism.
3. Connect the power adapter to the lamp's power input port, typically located at the base.
4. Plug the power adapter into a suitable wall outlet.



Figure 4.1: Fully assembled Kary Desk Lamp on a workspace.

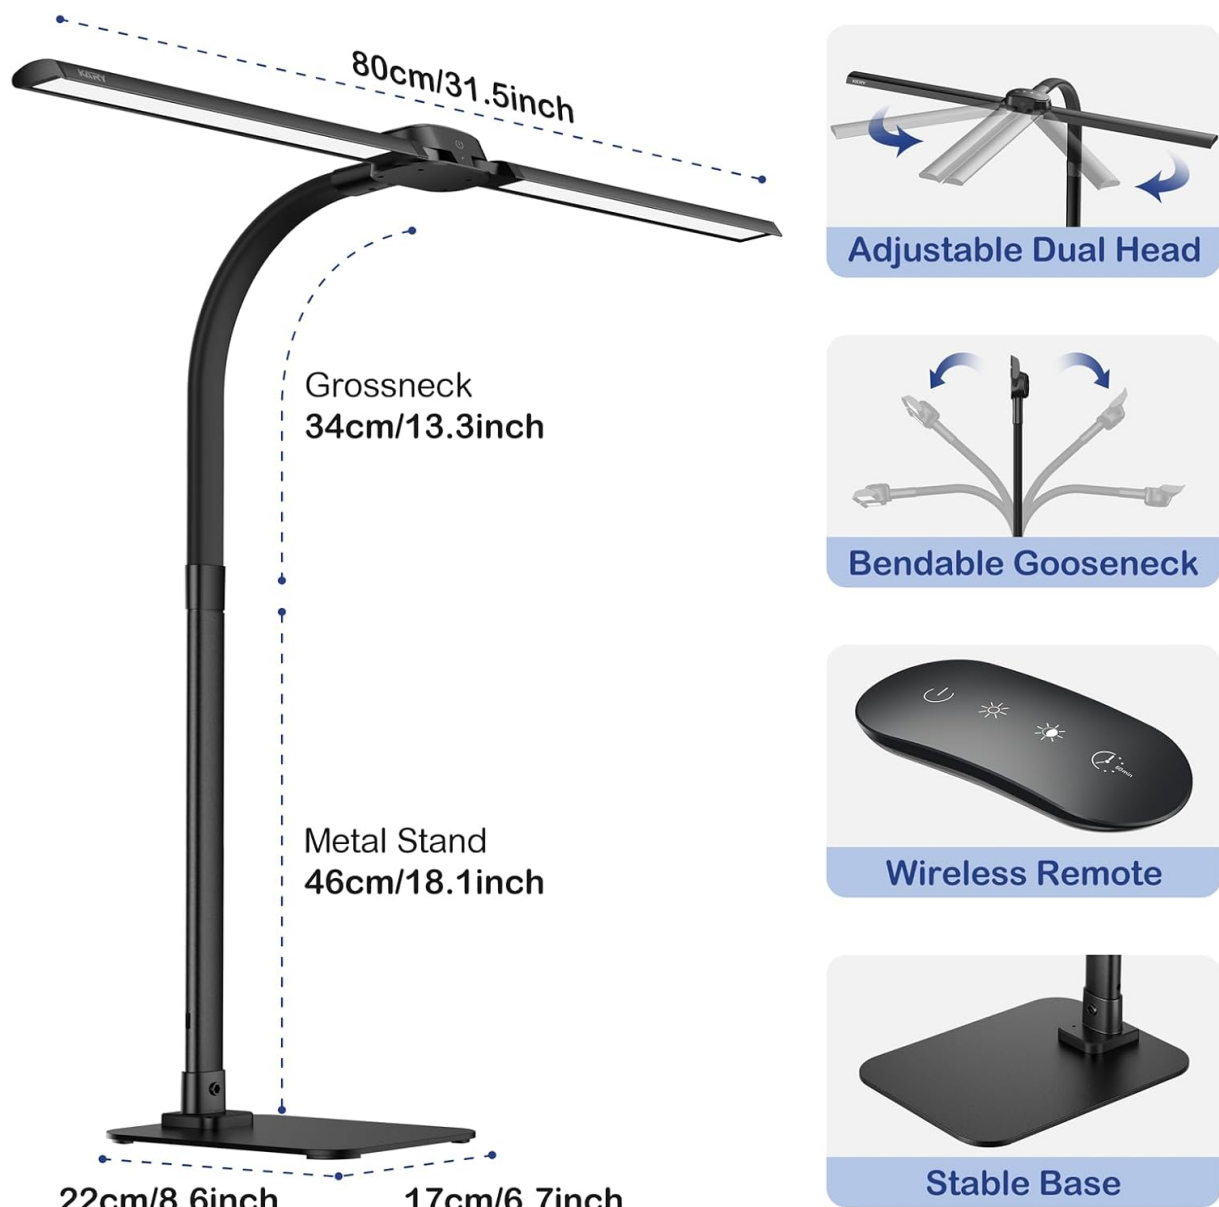


Figure 4.2: Detailed dimensions of the Kary Desk Lamp components.

Your browser does not support the video tag.

Video 4.1: Overview of the 24W Base Desk Lamp with USB Charging for Home Office, demonstrating its features and setup.

## 5. OPERATING INSTRUCTIONS

### 5.1 Power On/Off

- **Touch Control:** Lightly touch the power button on the lamp head to turn the lamp on or off.
- **Remote Control:** Press the power button ( ) on the remote control to turn the lamp on or off.

### 5.2 Adjusting Light Settings

The Kary Desk Lamp offers 5 color temperature modes and 5 brightness levels.

- **Color Temperature:** Use the sun icon buttons (☀) on the remote to cycle through 5 color temperature modes (3000K to 6500K).
- **Brightness Levels:** Use the light bulb icon buttons (💡) on the remote to adjust between 5 brightness levels (20% to 100%).



Figure 5.1: Visual representation of color temperature and brightness adjustments.

### 5.3 Flexible and Adjustable Light Direction

The dual-head design allows for flexible adjustment of light direction. You can rotate the light bars to direct illumination precisely where needed, reducing glare on screens and protecting your eyes.



Figure 5.2: Demonstrating the rotatable light bar for flexible lighting.

#### 5.4 USB Charging Port

A convenient USB charging port is integrated into the lamp's base, allowing you to charge electronic devices such as smartphones or earbuds while you work.

# NO Limited Stable Stand Fit Any Desk



Figure 5.3: USB charging port located on the lamp base.

## 6. KEY FEATURES

- **Dual-Head Design:** Provides flexible and adjustable light direction, illuminating your entire workspace without glare.
- **USB Charging Port:** Conveniently charge your electronic devices directly from the lamp.
- **Wireless Remote Control:** Easy operation with dedicated buttons for power, color temperature, and brightness.
- **Powerful Illumination:** 24W output and 31.5-inch wide light bar ensure ample brightness and wide coverage.
- **Customizable Lighting:** Choose from 5 color temperatures (3000K-6500K) and 5 brightness levels (20%-100%) to suit your needs.
- **Eye-Friendly Technology:** Features CRI>90 for high color rendering, minimizing eye strain and promoting visual comfort.

# Dual LED Lamp For Desk



Figure 6.1: The dual LED design provides extensive desk illumination.



Figure 6.2: The wide light bar ensures comprehensive lighting coverage.

## 7. SPECIFICATIONS

| Feature                     | Detail                  |
|-----------------------------|-------------------------|
| Brand                       | Kary                    |
| Model Number                | KX02D                   |
| Lamp Type                   | LED                     |
| Wattage                     | 24 watts                |
| Brightness                  | 1800 Lumen              |
| Color Temperature           | 3000K - 6500K (5 modes) |
| Brightness Levels           | 5 levels (20% - 100%)   |
| CRI (Color Rendering Index) | >90                     |

| Feature            | Detail                                        |
|--------------------|-----------------------------------------------|
| Product Dimensions | 17.52"D x 10.63"W x 2.48"H                    |
| Light Bar Length   | 31.5 inches (80cm)                            |
| Item Weight        | 4.84 pounds (2.2 Kilograms)                   |
| Base Material      | Metal                                         |
| Power Source       | Corded Electric                               |
| Controller Type    | Remote Control (IR)                           |
| Batteries Required | 1 Lithium Metal battery (included for remote) |

## 8. MAINTENANCE

To ensure the longevity and optimal performance of your Kary Desk Lamp, follow these simple maintenance guidelines:

- **Cleaning:** Unplug the lamp before cleaning. Use a soft, dry cloth to wipe down the lamp's surfaces. Do not use abrasive cleaners, waxes, or solvents as they may damage the finish.
- **Storage:** If storing the lamp for an extended period, unplug it and store it in a cool, dry place away from direct sunlight.
- **LEDs:** The LED light source is designed for long-term use and does not require replacement.

## 9. TROUBLESHOOTING

If you encounter any issues with your Kary Desk Lamp, please refer to the following common problems and solutions:

| Problem                           | Possible Cause / Solution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Lamp does not turn on.            | <ul style="list-style-type: none"><li>◦ Ensure the power adapter is securely plugged into both the lamp and the wall outlet.</li><li>◦ Check if the wall outlet is functioning correctly by plugging in another device.</li><li>◦ Verify the remote control battery is not depleted.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Remote control is not responding. | <ul style="list-style-type: none"><li>◦ Ensure there are no obstructions between the remote and the lamp's sensor.</li><li>◦ Replace the remote control battery if it's low.</li><li>◦ <b>Re-pairing the Remote:</b><ul style="list-style-type: none"><li>a. Turn on the lamp.</li><li>b. Press and hold the lamp's power button for 5 seconds; the lamp will start blinking.</li><li>c. Simultaneously press and hold the remote control's power button ( ) and color temperature button ( ) for 7 seconds; the remote control indicator light will turn blue, and the lamp will stop blinking, indicating successful pairing.</li><li>d. Press any button on the remote control, and the lamp should respond.</li></ul></li></ul> |

| Problem                              | Possible Cause / Solution                                                                                                                                                                                                                       |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Light flickers or dims unexpectedly. | <ul style="list-style-type: none"><li>◦ Check for loose connections at the power adapter or wall outlet.</li><li>◦ Ensure the lamp is not exposed to extreme temperatures.</li><li>◦ If the issue persists, contact customer support.</li></ul> |

## 10. WARRANTY AND SUPPORT

Kary products are manufactured to the highest quality standards. For information regarding warranty coverage, technical support, or replacement parts, please refer to the warranty card included with your purchase or visit the official Kary website. Please retain your proof of purchase for warranty claims.

For further assistance, please contact Kary Customer Service.