

FILCO M10SP

FILCO Majestouch Xacro M10SP 72-Key English Layout Split Ergonomic Keyboard User Manual

Model: FKBXS72MPS/EB

INTRODUCTION

The FILCO Majestouch Xacro M10SP is a high-performance, split ergonomic keyboard designed for enhanced comfort and productivity. It features a 72-key English layout and utilizes durable CHERRY MX Silent Red mechanical switches. This keyboard supports advanced macro programming, allowing for both hardware-level and software-based customization to suit individual user needs.

Key features include:

- **Key Switch:** CHERRY MX Silent Red (Linear, Silent type)
- **Key Count:** 72 keys (English layout)
- **Key Pitch:** 19mm
- **Key Stroke:** 3.7mm
- **Interface:** USB-C
- **Macro Function:** Hardware and Software macro support
- **Keycaps:** Durable PBT keycaps

SETUP

1. Connecting the Keyboard

The Majestouch Xacro M10SP connects via USB-C. Use the provided cables to connect the two halves of the keyboard and then connect the keyboard to your computer.

- Connect the left and right keyboard halves using the supplied USB-C to USB-C bridge cable.
- Connect the left keyboard half to your computer using the supplied 1.8m USB-C to USB-A cable.



Image: The FILCO Majestouch Xacro M10SP keyboard fully connected, showing the two halves joined by a cable.




Image: The FILCO Majestouch Xacro M10SP keyboard in its split configuration, demonstrating its ergonomic design.


2. Adjusting Ergonomics and DIP Switches

The keyboard's split design allows for various ergonomic adjustments. You can adjust the tilt and position of each half to find your most comfortable typing posture. The underside of the keyboard features DIP switches for advanced configuration, including layout changes and operating system compatibility (e.g., Mac mode).


異なる傾きを
セレクト可能



前方高



後方高



内側高

向きや配置を
自由に調整可能



Image: Various tilt and positioning options for the FILCO Majestouch Xacro M10SP, including forward high, backward high, and inner high.



Image: A close-up view of the DIP switches located on the underside of the FILCO Majestouch Xacro M10SP, used for advanced keyboard configuration.

OPERATING

Macro Programming

The Majestouch Xacro M10SP supports both hardware and software macro programming. The keyboard features 10 dedicated macro keys (M1-M10) for quick access to custom functions.

- **Hardware Macros:** Refer to the detailed instructions in the included quick guide for on-the-fly macro recording without software.
- **Software Macros:** Utilize the FILCO Assist software for comprehensive macro creation, key remapping, and profile

management. Connect the keyboard directly to your PC for optimal software functionality.



Image: A close-up of the M1-M5 dedicated macro keys on the left half of the FILCO Majestouch Xacro M10SP keyboard.



Image: A close-up of the M6-M10 dedicated macro keys on the right half of the FILCO Majestouch Xacro M10SP keyboard.



Image: Screenshot of the FILCO Assist software interface, demonstrating its capabilities for macro programming and key customization.

Indicator Lights

The keyboard features indicator lights for Caps Lock, Scroll Lock, Win Lock, and Layer status, providing visual feedback on the keyboard's current state.



Image: A close-up view of the indicator lights for Caps Lock, Scroll Lock, Win Lock, and Layer on the FILCO Majestouch Xacro M10SP.

MAINTENANCE

Cleaning

To maintain optimal performance and appearance, regularly clean your keyboard. Use a soft, lint-free cloth to wipe down the keycaps and chassis. For deeper cleaning, you may use a can of compressed air to remove dust and debris from between the keys.

Keycap Replacement

The keyboard comes with a FILCO Key Puller and replacement keycaps. To replace a keycap:

1. Gently attach the key puller to the keycap you wish to remove.
2. Pull straight up with even force until the keycap detaches from the switch.
3. Align the new keycap with the switch stem and press down firmly until it clicks into place.

TROUBLESHOOTING

Keyboard Not Responding

- Ensure all USB cables (bridge cable and connection to PC) are securely plugged in.
- Try connecting the keyboard to a different USB port on your computer.
- Restart your computer.

Macro Functions Not Working


- If using FILCO Assist software, ensure the keyboard is connected directly to your PC, not through a KVM switch or USB hub, as this can interfere with software communication.
- Verify that the correct layer is active if your macros are assigned to specific layers.
- Check the DIP switch settings on the underside of the keyboard to ensure they are configured correctly for your operating system and desired functionality.
- Consider resetting the keyboard to factory defaults using the appropriate DIP switch setting or software option, then re-program your macros.

SPECIFICATIONS

Feature	Detail
Brand	FILCO
Model	Majestouch Xacro M10SP (FKBXS72MPS/EB)
Key Switch	CHERRY MX Silent Red (Linear)
Key Count	72 keys
Key Layout	English (QWERTY)
Key Pitch	19mm
Key Stroke	3.7mm
Dimensions (L x W x H)	33.6 x 12.3 x 3.9 cm
Weight	840g
Interface	USB-C
Macro Function	Hardware Macro, Software Macro
Compatible OS	Windows (Mac compatibility via DIP switches)
Included Components	FILCO Key Puller, USB Cable (1.8m/USB-C to USB-A), Bridge Cable (USB-C to C), Replacement Keycaps

CHERRY MX 静音軸

5000万回
以上の押下
耐久性

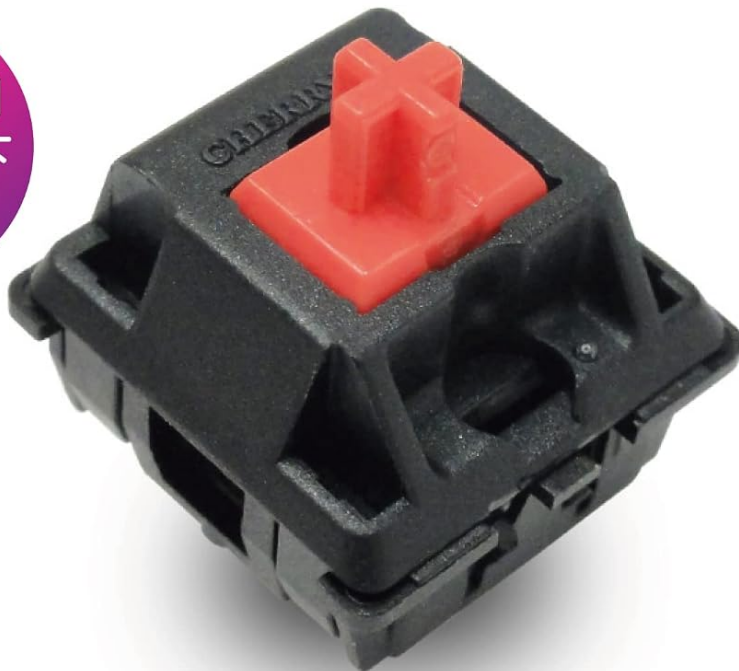

クリック感	押下圧	ストローク	接点
なし	45cN ±15cN	3.7mm-0.4mm	1.9mm±0.6mm

- ・キーを押し下げるほどスイッチが重くなっていく
リニアストロークタイプ
- ・打鍵音が 30%削減されるとする静音スイッチです

Image: Detailed specifications for the CHERRY MX Silent Red switch, including click feel, actuation force, stroke, and contact point.

WARRANTY

This product is covered by the manufacturer's warranty. Please refer to the warranty card included in the packaging or visit the official FILCO website for detailed warranty terms and conditions.

SUPPORT

For technical assistance, product inquiries, or further support, please visit the official FILCO website or contact their customer service department. Contact information can typically be found on the manufacturer's website or in the product packaging.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question