

ABBIDOT AB-T50

ABBIDOT Dog Training Collar User Manual

Model: AB-T50

INTRODUCTION

The ABBIDOT AB-T50 Dog Training Collar is designed to provide effective and humane training for dogs ranging from 5 to 130 lbs. It features a remote control with a long range, multiple training modes, enhanced safety features like a night light and stimulation lock, and a waterproof collar. This manual provides detailed instructions for setup, operation, and maintenance to ensure optimal performance and the well-being of your pet.

PRODUCT FEATURES

- **Multiple Training Modes:** Offers Tone (1-16 levels), Vibration (1-36 levels), General Stimulation (1-49 levels), and Enhanced Stimulation (50-99 levels) for progressive and humane training.
- **Waterproof Collar:** The receiver collar is waterproof, suitable for various outdoor activities. (Note: The remote is not waterproof).
- **Enhanced Night Visibility:** Built-in LED light on the collar improves visibility in low-light conditions, enhancing safety during night walks.
- **Long-lasting Rechargeable Battery:** A 2-hour charge provides up to 35 days of battery life for continuous training. Both units feature low battery indicators.
- **Adjustable Nylon Strap:** Durable and adjustable nylon strap fits dogs from 8-120 lbs, ensuring a secure and comfortable fit.
- **Stimulation Lock:** Features a lock mechanism to prevent accidental stimulation.
- **Long Range Remote:** Operates effectively up to 3300 feet, allowing for training without boundaries.

PACKAGE CONTENTS

- Remote Control Transmitter
- Receiver Collar with Adjustable Nylon Strap

- Dual USB Charging Cable
- Contact Points (short and long)
- Conductive Silicone Caps
- Test Light Tool
- User Manual (this document)

SETUP GUIDE

1. Charging the Devices

Before first use, fully charge both the remote control and the receiver collar. Use the provided dual USB charging cable. A full charge typically takes 2 hours. The low battery indicators will alert you when charging is needed.



Image: The ABBI DOT dog training collar system, showing the remote and the receiver collar, along with its packaging.

2. Attaching Contact Points (if necessary)

The receiver collar comes with contact points. Choose the appropriate length based on your dog's fur length. For dogs with shorter fur, the shorter contact points or even no metal contact points (using only the silicone caps) may be sufficient for vibration and tone. For dogs with thicker fur, longer contact points may be required to ensure proper contact with the skin. Attach the conductive silicone caps over the metal contact points for added comfort and to prevent direct metal-to-skin contact.



Image: A close-up view of the receiver collar's underside, illustrating the attachment points for the contact screws and the silicone caps.

3. Adjusting the Collar Strap

The nylon strap is adjustable and can be cut to fit your dog's neck size. Ensure the collar is snug enough for the contact points to make consistent contact with the skin, but not so tight that it causes discomfort. You should be able to fit one finger comfortably between the collar and your dog's neck.

Adjustable Strap

For All Size of Dogs



10-130 lbs

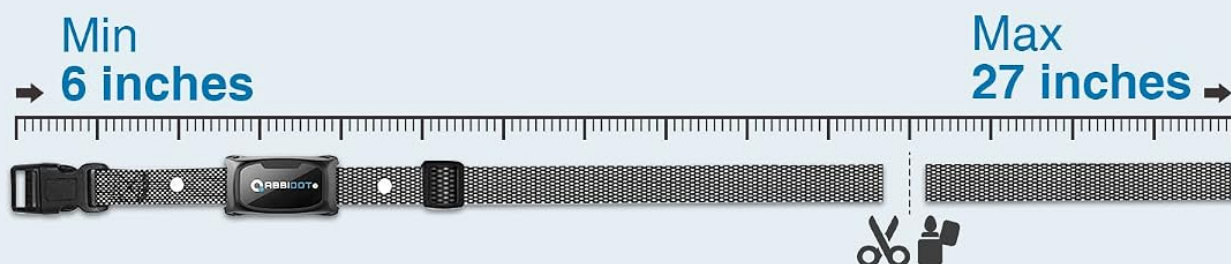


Image: Diagram illustrating the adjustable strap of the training collar, showing minimum and maximum lengths and indicating suitability for dogs from 10-130 lbs.

OPERATING INSTRUCTIONS

1. Powering On/Off

To power on the remote and receiver, press and hold their respective power buttons until the indicators light up. To power off, press and hold the power buttons again.

2. Training Modes

The remote offers four training modes: Tone, Vibration, General Stimulation, and Enhanced Stimulation. Use the mode selection buttons on the remote to switch between these options.

- **Tone Mode:** Provides an audible beep. Levels 1-16.
- **Vibration Mode:** Delivers a tactile vibration. Levels 1-36.
- **General Stimulation Mode:** Provides static stimulation. Levels 1-49, suitable for small to medium dogs.
- **Enhanced Stimulation Mode:** Provides stronger static stimulation. Levels 50-99, suitable for medium to large dogs.

Humane Training

4 Training Sessions



Tone
16 Levels



Vibration
36 Levels



General Stimulation
1-49 Levels For S/M Dogs



Enhance Stimulation
50-99 Levels For M/L Dogs

Image: The remote control displaying the four training modes: Tone, Vibration, General Stimulation, and Enhanced Stimulation, along with their respective level ranges.

3. Adjusting Intensity Levels

Use the rotary dial on the remote to adjust the intensity level for Vibration and Stimulation modes. The current level is displayed on the remote's screen.



Image: A close-up of the remote control's rotary dial, used for adjusting stimulation levels, with an arrow indicating rotation.

4. Stimulation Lock Feature

To prevent accidental stimulation, the remote features a stimulation lock. Push the rotary dial down to lock or unlock the stimulation function.

Security Lock

Say Goodbye to Accidental Shocks

Push down
Lock/unlock
the Stimulation



99 Levels

Easy to adjust
the Stimulation level



Image: The remote control with an arrow pointing to the rotary dial, indicating the "Push down" action to lock/unlock stimulation.

5. Night Light Function

The receiver collar has a built-in LED light for enhanced visibility in the dark. Activate this feature using the remote control to easily locate your dog during night walks or early morning training sessions.

Anti-lost Light

Built-in LED Light



Image: A dog wearing the training collar with its built-in LED light activated, illuminating the area in front of the dog in a dark setting, labeled "Night-vision Light".

6. Range and Waterproofing

The remote control has a range of up to 3300 feet, providing ample freedom for outdoor training. The receiver collar is IPX7 waterproof, allowing your dog to play freely in water. The remote control is not waterproof and should be kept dry.

Longer Range

Training Without Any Bound



Image: A graphic illustrating the 3300ft range of the training collar remote, with a dog in the distance.

Waterproof IPX7

Playing Freely with the Water



Image: A dog swimming underwater, wearing the waterproof IPX7 training collar, demonstrating its water resistance.

MAINTENANCE

- **Cleaning:** Regularly clean the collar and contact points with a damp cloth. Ensure all components are dry before charging or storing.

- **Battery Care:** Charge the devices fully before long periods of inactivity to preserve battery health.
- **Storage:** Store the collar and remote in a dry place at room temperature.
- **Skin Inspection:** Regularly check your dog's neck for any signs of irritation or sores from the contact points. If irritation occurs, discontinue use and consult a veterinarian.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Collar not responding to remote.	Low battery on either device, out of range, or not properly paired.	Charge both units. Ensure you are within the 3300ft range. Re-pair the remote and collar according to the pairing instructions in the full user guide.
Stimulation/Vibration not felt by dog.	Collar too loose, incorrect contact point length, or silicone caps are on when not intended for use with stimulation.	Adjust collar for a snug fit. Use longer contact points for thicker fur. Ensure silicone caps are removed if direct contact is needed for stimulation (though not recommended for comfort). Test the stimulation with the provided test light tool.
Remote settings change accidentally.	Rotary dial is easily turned in a pocket.	Utilize the stimulation lock feature by pushing the rotary dial down. Be mindful of how the remote is carried.
Skin irritation on dog's neck.	Collar worn for too long, too tight, or improper contact point use.	Do not leave the collar on for more than 8-12 hours per day. Ensure proper fit (one finger space). Rotate collar position daily. If irritation persists, discontinue use and consult a veterinarian.

SPECIFICATIONS

- **Model Number:** AB-T50
- **Item Weight:** 7.1 ounces (200 Grams)
- **Item Dimensions (LxWxH):** 6 x 5 x 0.1 inches
- **Manufacturer:** Shenzhen Zheer Life Technology Co., Ltd.
- **Batteries:** 2 Lithium Ion batteries (included)
- **Date First Available:** October 18, 2023
- **Color:** Black
- **Size:** 1 Collar
- **Material:** Nylon
- **Target Audience:** Dogs (All Life Stages, All Breed Sizes)
- **Waterproof Rating:** IPX7 (Collar only)
- **Range:** Up to 3300 feet

WARRANTY AND SUPPORT

The ABBIDOT Dog Training Collar comes with a **1-year warranty**. For any product inquiries, technical support, or warranty claims, please contact ABBIDOT customer service.

Email Support: Support@abbidot.com

For additional resources, you may visit the official ABBIDOT store on Amazon: [ABBIDOT Store](#)



Image: The ABBIDOT brand logo, representing the manufacturer.



Image: Graphic detailing ABBIDOT's customer service, including refund/replacement options and support email.

© 2024 ABBIDOT. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0CKZ387C5>

More documents and user manuals: <https://manuals.plus/>