

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [Solati](#) /

> [Solati Professional Men's Grooming Kit - Cordless Waterproof Hair Trimmer with LCD Display - Zero Gap T-Blade User Manual](#)

Solati Solati

Solati Professional Men's Grooming Kit

Model: Solati

INTRODUCTION

Thank you for choosing the Solati Professional Men's Grooming Kit. This cordless and waterproof hair trimmer is designed for versatile grooming, featuring a precise zero-gap T-blade and an intuitive LCD display. This manual provides essential information for safe and effective use, maintenance, and troubleshooting.

Important Safety Warnings

- Not suitable for infants.
- Keep the device away from water when in operation.
- Clean and dry the trimmer head thoroughly after washing.
- Do not disassemble the device. Refer to qualified personnel for repairs.
- Store in a cool, dry place, out of reach of children.

PRODUCT OVERVIEW AND COMPONENTS

The Solati Professional Men's Grooming Kit includes the main trimmer unit and several essential accessories for a complete grooming experience.



Image: The Solati Professional Men's Grooming Kit, showcasing the main trimmer unit, four guide combs (1mm, 2mm, 4mm, 6mm), a USB Type-C charging cable, a cleaning brush, and a small bottle of lubricating oil.



Image: A detailed breakdown of the Solati trimmer's features, including the sharp blade, ON/OFF button, LED display, Type-C USB charge port, powerful motor, and whole-body washable design.

Package Contents:

- Solati Hair Trimmer Unit
- 4 Guide Combs (1mm, 2mm, 4mm, 6mm)
- USB Type-C Charging Cable
- Cleaning Brush
- Lubricating Oil
- Blade Protective Cap

SETUP

Charging the Trimmer

Before first use, fully charge the trimmer. The device is equipped with a powerful rechargeable lithium-ion battery.

1. Connect the USB Type-C charging cable to the trimmer's charging port.
2. Plug the other end of the USB cable into a compatible USB power source (e.g., USB charger, power bank, laptop).
3. The LCD display will show the charging progress. A full charge takes approximately 3 hours and provides up to 200 minutes of working time.
4. Once fully charged, disconnect the cable.



ULTRA LONG BATTERY LIFE

Up to 30Days runtime on a single charge

- Remaining Battery
- Travel Lock

150 Mins = **200 Mins**
Charging Time Working Time

Image: The Solati trimmer highlighting its USB Type-C charging port and the digital LCD display showing battery percentage and a travel lock indicator. The image also illustrates the charging process with a USB cable.

Attaching Guide Combs

Select the desired guide comb (1mm, 2mm, 4mm, or 6mm) based on the hair length you wish to achieve.

- Ensure the trimmer is turned off.
- Align the guide comb with the trimmer blade and push it firmly until it clicks into place.
- To remove, gently pull the comb away from the blade.

POWERFUL MOTOR WITH HIGHROTATING SPEED

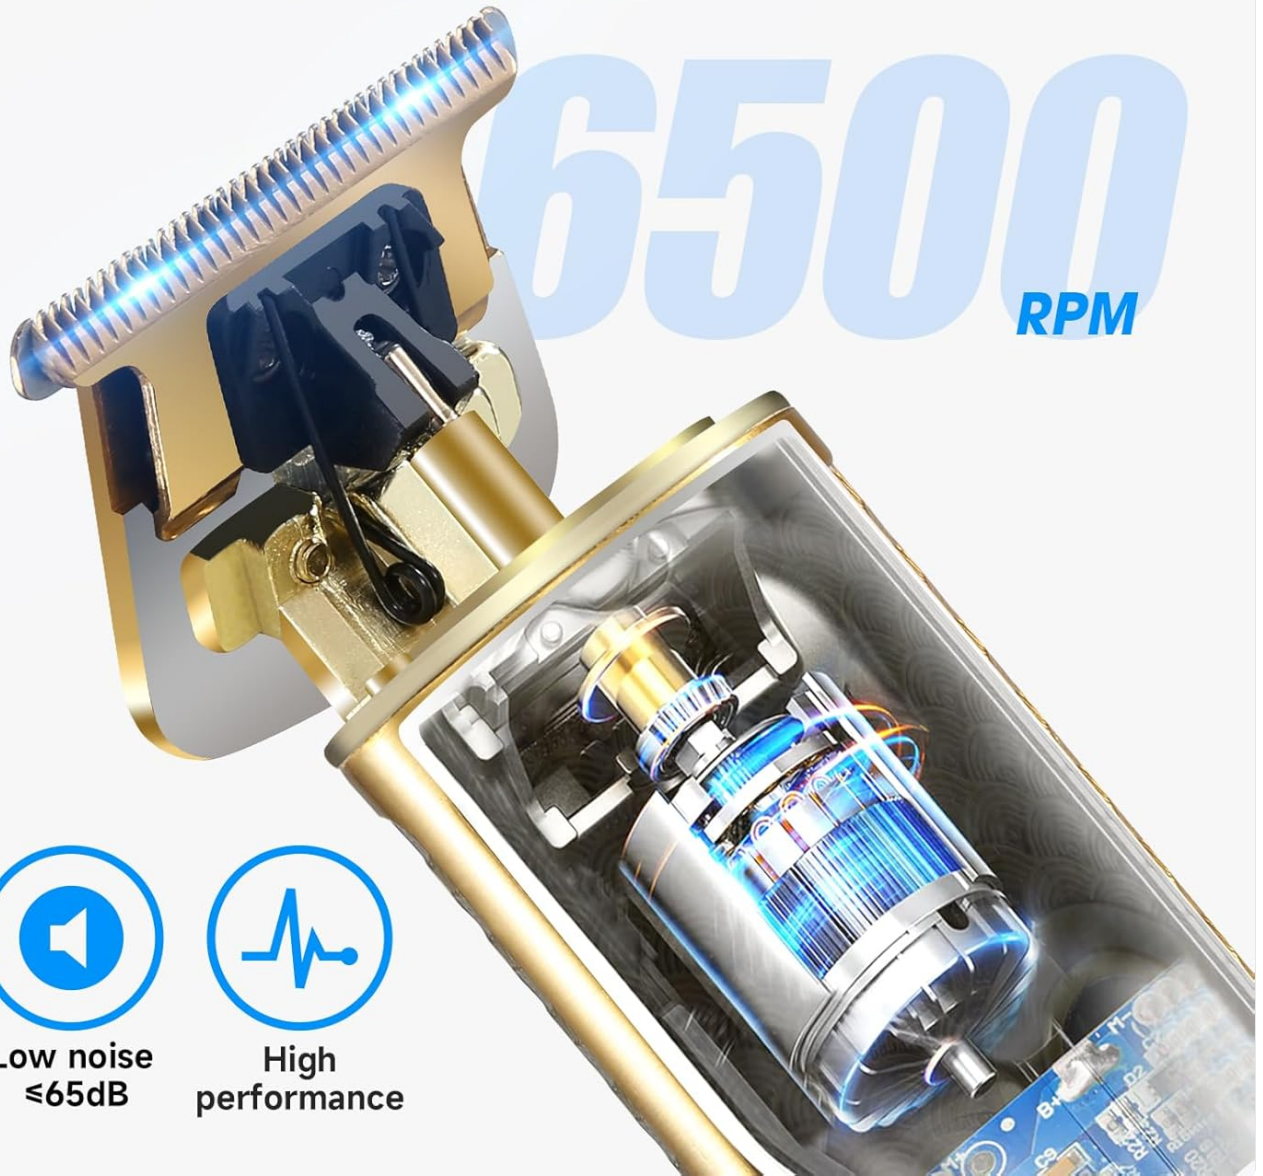


Image: The Solati trimmer with its four interchangeable guide combs (1mm, 2mm, 4mm, 6mm) displayed, indicating their use for different hair lengths and types.

OPERATING INSTRUCTIONS

Turning On/Off

- To turn on the trimmer, press the ON/OFF button located on the front of the device.
- To turn off, press the ON/OFF button again.
- The LCD display will show the current battery percentage when the device is on.

Grooming Techniques

The Solati trimmer is versatile for various grooming needs, including hair cutting, beard trimming, and precise detailing.

EVERYDAY USE

BARBERS' CHOICE



Image: Demonstrations of the Solati trimmer in use for everyday grooming, including hair art, beard trimming, and fading techniques, suitable for both personal use and professional barbers.

- **Hair Cutting:** For general hair cutting, attach the appropriate guide comb. Move the trimmer against the direction of hair growth for an even cut.
- **Beard Trimming:** Use a guide comb for desired beard length. For precise lines and edges, remove the comb and use the bare blade.
- **Detailing and Zero-Gap Trimming:** The zero-gap T-blade is ideal for sharp lines, intricate designs, and close shaves. Use caution in sensitive areas.

Whole Body Washable

IP-X6



Waterproof



Image: The Solati trimmer's blade and the four limit combs (1mm, 2mm, 4mm, 6mm) are shown, emphasizing its suitability for all hair types and various cutting lengths.

MAINTENANCE

Cleaning the Trimmer

The Solati trimmer is IP-X6 waterproof, allowing for easy cleaning under running water.

Suitable For All Hair Types

4 limit combs to meet e ifferent length

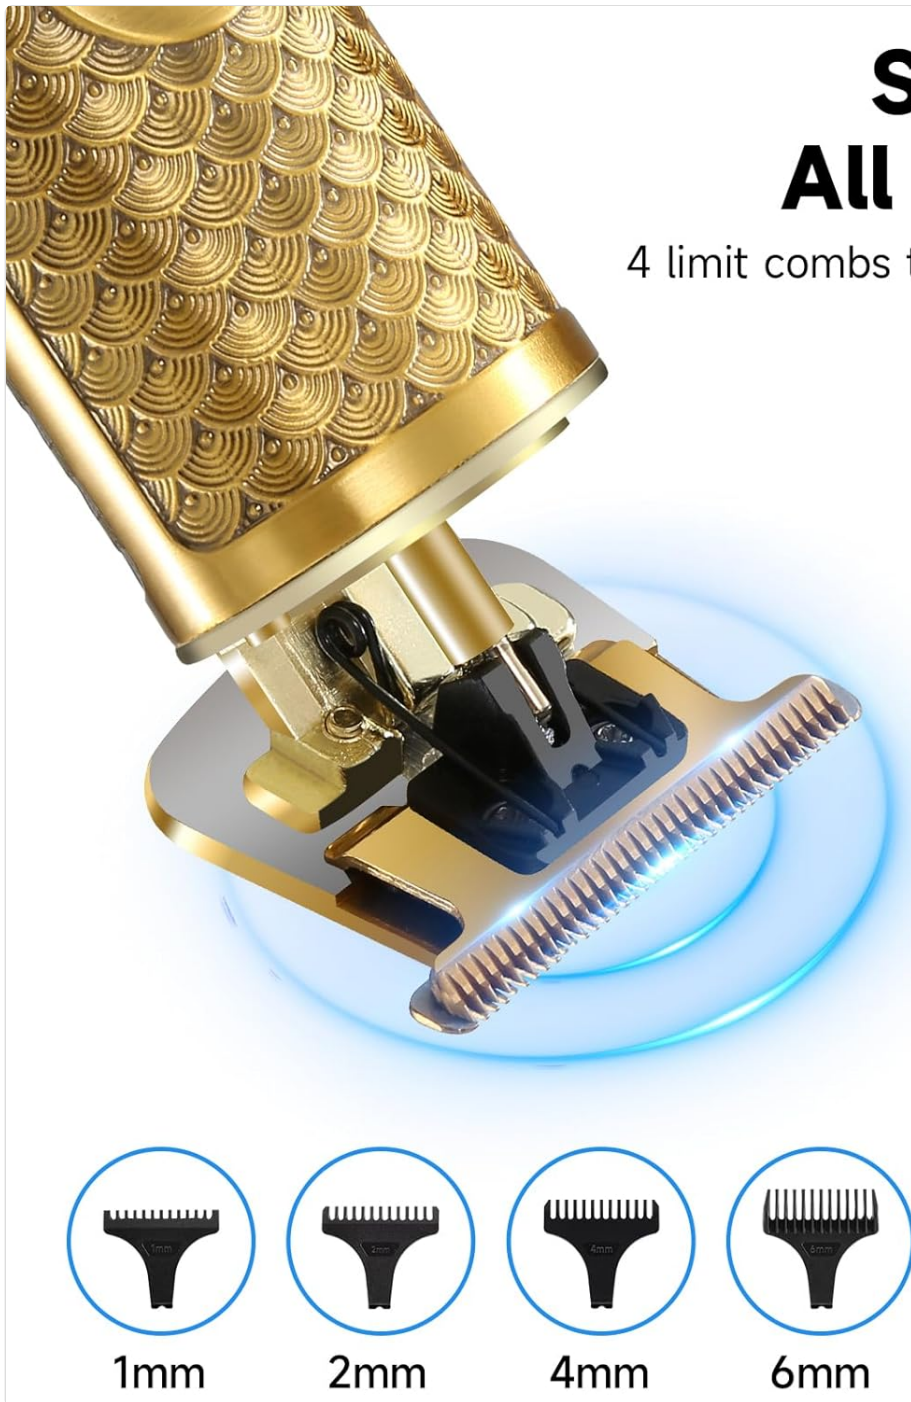


Image: The Solati trimmer partially submerged in water, illustrating its IP-X6 waterproof capability for easy cleaning.

1. After each use, turn off the trimmer and remove any attached guide combs.
2. Use the provided cleaning brush to remove loose hairs from the blade and body.
3. Rinse the blade and the entire trimmer body under running water. Ensure the charging port cover is securely closed.
4. Shake off excess water and allow the trimmer to air dry completely before storing or recharging.

Blade Lubrication

Regular lubrication ensures optimal performance and extends the life of the blades.

- After cleaning and drying, apply 1-2 drops of the provided lubricating oil onto the blades.
- Turn on the trimmer for a few seconds to distribute the oil evenly.
- Wipe off any excess oil with a clean cloth.

Storage

Store the trimmer in a dry place, away from direct sunlight and extreme temperatures. Use the blade protective cap when

not in use.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Trimmer does not turn on.	Battery is low or depleted.	Charge the trimmer fully.
Poor cutting performance.	Blades are dirty or not lubricated. / Hair buildup.	Clean the blades thoroughly and apply lubricating oil. Remove any hair trapped in the blades.
Trimmer makes unusual noise.	Blades are not properly aligned or lubricated.	Ensure blades are clean and lubricated. If noise persists, contact support.
LCD display not working.	Device malfunction.	Ensure battery is charged. If issue persists, contact support.

SPECIFICATIONS

Feature	Detail
Brand	Solati
Model Number	Solati
Power Source	Battery Powered (1 Lithium-ion battery, included)
Blade Material	Metal
Waterproof Rating	IP-X6 (Whole Body Washable)
Charging Time	Approx. 3 hours
Working Time	Up to 200 minutes
Guide Combs	1mm, 2mm, 4mm, 6mm
Product Dimensions	21.4 x 12.1 x 5.4 cm
Product Weight	420 grams
UPC	729162979473



Image: The complete Solati Professional Men's Grooming Kit, illustrating its compact design and included accessories.

WARRANTY AND SUPPORT

This product is sold by Solati-EU. For any warranty claims, technical support, or product inquiries, please contact the seller directly through your purchase platform. Please refer to your purchase documentation for specific warranty terms and conditions.

For general inquiries or assistance, you may also visit the Solati brand page on Amazon or contact Amazon customer service.

- **Seller:** Solati-EU
- **ASIN:** B0CL4QLF43

